

Premium Decorative Wiring Accessories



Contents

New Features	В7
Switches	B10
Back Boxes	B19
Power Socket Outlets	B22
Socket & Blank Plates	B24
13A Fused Connection Units	B25
Control Switches	B26
Telephone & Data Sockets	B30
TV & Satellite	B31
New Media™ Plates	B33
Yokes & Back Boxes	B34

A comprehensive range of premium decorative metal wiring accessories is now available under the Deco Plus® brand. A brand that is synonymous with high specification, exceptional quality and unprecedented value.

The smooth contemporary curves of the Deco Plus® range are available in seven finishes to complement any room.

Each product is supplied individually packaged in its own distinctive printed box complete with full fitting instructions.

Deco Plus® switches feature the same modular switch design as our moulded ranges. All of the switch modules featured in our Minigrid® brochure can therefore be used in any combination on Deco Plus® accessories.

All Deco Plus® 13A sockets and fused connection units are tested and approved to BS1363 offering assured quality and safety.

All Deco Plus® products featured in the pages of this brochure are available in seven distinctive quality finishes. *UK Design Registration 3015621.

All Deco Plus® products are available with black or white inserts, excluding antique brass and black nickel finishes, which are supplied with black insert and gasket only.

A selection of Stainless Steel and Satin Chrome finishes are now available with grey inserts.



Antique Brass* (AB)



Satin Brass* (SB)



Satin Chrome*



Polished Brass (BR)




Black Nickel (BN)



Stainless Steel



Polished Chrome (CH)

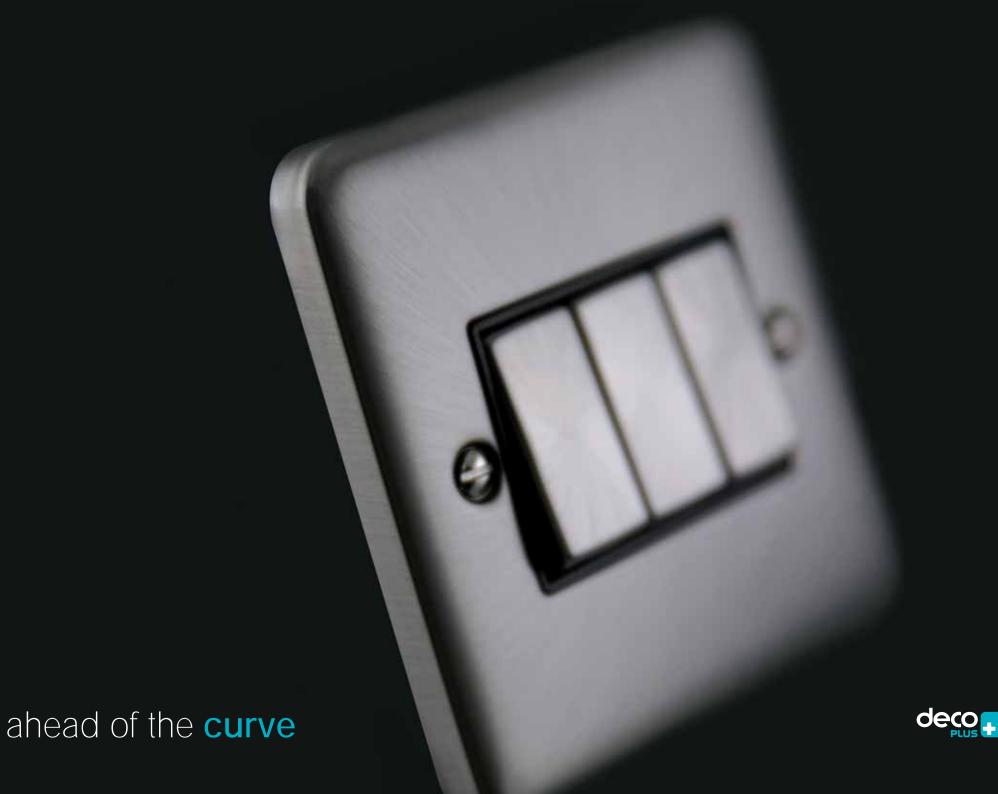



New Features

...plus so much more

Attention to detail has been at the forefront of the design process for our newest range of wiring accessories. All aspects, no matter how small, have been taken into account and collectively create the elegant style that characterises Deco Plus®.





Every accessory within the range which contains a neon now has an insert surrounding the lens of the neon.



An attractive feature added to the Deco Plus® range is the profile of the cooker sockets. Instead of the traditional T-bar shape, our new range matches the profile of our ingot sockets.

Modular Ingot Plate Switches

Toggle Switches | Dimmer Switches

All Deco Plus* switches are supplied complete with requisite switch module(s). However, should local conditions dictate, the installer may customise a switch arrangement by substituting switch modules by means of a simple, single fixing screw.

A comprehensive range of available modules is illustrated in our dedicated Minigrid® brochure. Unfurnished mounting plates can be ordered separately and furnished with whatever selection of switch modules may be required.

MINIGRID

Please see page J18 for a selection of Minigrid® modules.









413



414



MINIGRID® Switch modules interchangeable with MiniGrid® Modules.

For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

Ingot Plates Switches - MiniGrid®

- 411 10AX Ingot 1 Gang 2 Way Plate Switch
- 412 10AX Ingot 2 Gang 2 Way Plate Switch
- 414 10AX Ingot 4 Gang 2 Way Plate Switch

412

- 416 10AX Ingot 6 Gang 2 Way Plate Switch

Standards: BS EN 60669-1

Back Box Depth: 1 Gang: 16mm Minimum 2 Gang: 25mm Minimum

Cable Size: 4 x 1.5mm² or 2 x 2.5mm²

Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.





402







404



426

For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.

Unfurnished Plates - MiniGrid®

- 401 1 Gang MiniGrid® Unfurnished Plate 1 Aperture
- 402 1 Gang MiniGrid® Unfurnished Plate 2 Apertures
- 403 1 Gang MiniGrid® Unfurnished Plate 3 Apertures
- 404 2 Gang MiniGrid® Unfurnished Plate 2 x 2 Apertures
- 406 2 Gang MiniGrid® Unfurnished Plate 2 x 3 Apertures
- 426 2 Gang MiniGrid® Unfurnished Plate 6 In-Line Apertures

Architrave Unfurnished Plates - MiniGrid®

- 471 1 Gang MiniGrid® Unfurnished Architrave Plate - 1 Aperture
- 472 2 Gang MiniGrid® Unfurnished Architrave Plate - 2 Apertures

These plates must be used with the architrave back boxes WA671 / WA672 and can only be flush mounted.

Standards: BS 5733

Back Box Depth: Dependent On Modules Fitted

Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D) Single architrave: 35mm (W) x 88mm (H) x 8mm (D) Twin architrave: 35mm (W) x 150mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour

















MD9125 Intermediate module available.

Satin Chrome & Stainless Steel plate finishes require the use of a Pearl Nickel (PN) Toggle Switch Module. Not interchangeable with dimmers or other MiniGrid® modules.

Toggle Switches

422 10AX 2 Gang 2 Way Toggle Switch MD9125BN Intermediate Toggle Switch Module - Black Nickel

10AX Intermediate Toggle Switch Modules 421 10AX 1 Gang 2 Way Toggle Switch MD9125AB Intermediate Toggle Switch Module - Antique Brass

423 10AX 3 Gang 2 Way Toggle Switch MD9125BR Intermediate Toggle Switch Module - Polished Brass 10AX 4 Gang 2 Way Toggle Switch MD9125CH Intermediate Toggle Switch Module - Polished Chrome Intermediate Toggle Switch Module - Pearl Nickel

Toggle Modules only fit in existing toggle plates

Back Box Depth: 25mm Minimum Cable Size: 4 x 1.5mm² or 2 x 2.5mm²

Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D) Modules: 25mm (W) x 62mm (H) x 22mm (D)

Understanding the code:
DP - Plate Style BN - Plate Finish 536 - Product No.





140 | 161



153 | 163

154 | 164

152 | 162



MINIGHID® Interchangeable modules available on page J37.

For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section.

Dimmer Switches (Leading Edge)

140 1 Gang 2 Way 400Va Dimmer Switch

152 2 Gang 2 Way 400Va Dimmer Switch

153 3 Gang 2 Way 400Va Dimmer Switch

154 4 Gang 2 Way 400Va Dimmer Switch

Dimmer Switches (Trailing Edge)

161 1 Gang 2 Way 100W Dimmer Switch

162 2 Gang 2 Way 100W Dimmer Switch

163 3 Gang 2 Way 100W Dimmer Switch

164 4 Gang 2 Way 100W Dimmer Switch

We recommend the use of branded halogen lamps with all Deco Plus® leading edge dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. These dimmer switches have not been designed to use with LED lamps. However, they may be suitable for some good quality LED lamps. For further information please contact Click® Technical support team.

We recommend the use of branded LED lamps with all Deco Plus® trailing edge dimmers.

Standards; BS EN 60669-1 BS EN 55015 BS EN 61000-3-2 400Va: BS EN 61000-3-3 100W: BS EN 60669-2-1

Type: 400Va: Leading Edge Technology 100W: Trailing Edge

Back Box Depth: 25mm Minimum Cable Size: 2 x 1.5mm²

Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)

Understanding the code:
DP - Plate Style BN - Plate Finish 536 - Product No.

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.







140PL



185

186

Dimmer Modules

MD9001 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)

MD9010 1-10V Analogue Dimmer Module (25 x 62mm) MD9022 250W 2 Leading Edge Way Dimmer Module (25 x 62mm)

MD9042 400W 2 Way Leading Edge Dimmer Module (25 x 62mm) MD9014 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)





Dimmer M10 Nut Runner

SP900 Dimmer M10 Nut Runner Tool

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate

Dimmer Mounting Unfurnished Plates

140PL 1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture

152PL 2 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures

153PL 3 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures

154PL 4 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures

1 Gang Dimmer Plate & Knob (1000W Max) - 1 Aperture

2 Gang Dimmer Plate & Knobs (1630W Max) - 2 Apertures

The dimmer modules are supplied separately.

For recessed wall boxes and longer fixing screws see page M6

Standards: BS 5733

Back Box Depth: Dependent On Modules Fitted

Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)

Understanding the code:

DP - Plate Style BN - Plate Finish 536 - Product No.































Minigrid® modules are available in the same decorative finishes as the Deco Plus® range as well as white and black, so there are plenty of options available to suit your application.











If dimmer modules are to be mounted directly above each other, the MD9014 (page J37) or similar height dimmer modules must be installed. Alternatively, retractive switch modules MD004 (page J21) can be used in conjunction with Click Smart+ dimming receivers (page A18).

2 Tier Unfurnished Plates c/w Gaskets - MiniGrid®

512 2 Tier MiniGrid® Unfurnished Plate - 12 Apertures 2 x GR100 Yokes required, see page B19

3 Tier Unfurnished Plates c/w Gaskets - MiniGrid®

518 3 Tier MiniGrid® Unfurnished Plate - 18 Apertures 3 x GR100 Yokes required, see page B19

Standards: BS 5733 Back Box Depth: 47mm

Dimensions: 512: 146mm (W) x 146mm (H) x 8mm (D) 518: 146mm (W) x 227mm (H) x 8mm (D)

Understanding the code:
DP - Plate Style BN - Plate Finish 536 - Product No.

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.









Galvanised steel back boxes supplied for flush mounting of the large MiniGrid® plates.

Mounting Yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.

Yokes

GR100BK MiniGrid® Module Yoke - 6 Apertures - Black GR100PW MiniGrid® Module Yoke - 6 Apertures - White GR100GY MiniGrid® Module Yoke - 6 Apertures - Grey

2 or 3 yokes are required based on the backbox selected.





Galvanised Steel Back Boxes

WA518

WA512 2 Tier 47mm Deep K.O. Box WA518 3 Tier 47mm Deep K.O. Box


Standards: 512 518: BS 4662

Dimensions: 512: 518: B5 4062

Dimensions: 512: 137mm (W) x 137mm (H) x 47mm (D)

518: 137mm (W) x 197mm (H) x 47mm (D)

100: 129mm (W) x 55mm (H) x 14mm (D)

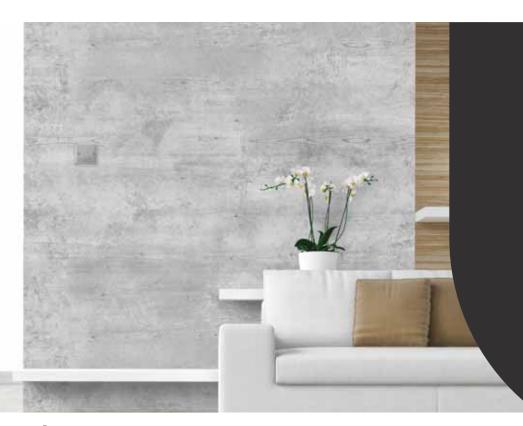

Power Socket Outlets, Fused Connection Units and Control Switches

13A Wall Socket Outlets | Round Pin Wall Socket Outlets
Fused Connection Units | Fan Isolation Switches
DP Switches | Sockets with USB outlets | Lockable Switches & Sockets



With the ever increasing demand for power supplies in all areas of the home, comes the problem of selecting and fitting outlets which blend harmoniously with the décor of the room in which they are to be fitted.

The seven different Deco Plus® plate finishes offer a solution for almost every possible design need and will enhance the décor of any area, whether in a kitchen, bedroom, lounge or study etc.



DECO PLUS

B23





536

1536









1836

Ingot Switched Socket Outlets

836

535 13A Ingot 1 Gang DP Switched Socket

536 13A Ingot 2 Gang DP Switched Socket (Twin Earth)

1535 13A Ingot 1 Gang DP 3 Pin Safety Shutter Switched Socket Outlet

1536 13A Ingot 2 Gang DP 3 Pin Safety Shutter Switched Socket Outlet (Twin Earth)

Ingot Switched Socket Outlets With Outboard Rockers

836 13A Ingot 2 Gang DP Switched Socket With Outboard Rockers (Twin Earth)

1836 13A Ingot 2 Gang DP 3 Pin Safety Shutter Outboard Switched Socket Outlet (Twin Earth)

Standards: BS 1363-2 Back Box Depth: 25mm Minimum Cable Size: 3 x 2.5mm² or 2 x 4mm²

Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.











580





586

Ingot Switched Sockets With USB Outlet

13A Ingot 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)

13A Ingot 2 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)

Round Pin Socket Outlets

038 5A Round Pin Socket 039 2A Round Pin Socket

Ingot Switched Sockets With Twin USB Outlets

13A Ingot 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)

13A Ingot 2 Gang Switched Safety Shutter Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)

Standards: BS 1363-2: 2016 +A1: 2018 BS EN IEC 62368-1 BS EN 62680-1-1 038 039: BS 546 Back Box Depth: 25mm Minimum Cable Size: 3 x 2.5mm² or 2 x 4mm² 038: 4 x 1.5mm² or 3 x 2.5mm² 039: 3 x 1.5mm² Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.





024









100

Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5:2010 making it safe for use in bathrooms.

This outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.

20A DP Sink/Bath Switch

024 20A DP Sink/Bath Switch With Neon

Dual Voltage Shaver Socket

100 115/230V Dual Voltage Shaver Socket

Blank Plates

060 1 Gang Blank Plate 061 2 Gang Blank Plate

Back Box Depth: 024, 061: 25mm Minimum 060: 16mm Minimum 100: 47mm

Cable Size: 024: 3 x 2.5mm² 100: 2 x 1.5mm² or 1 x 2.5mm²

Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D) 100: 88mm (W) x 146mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.















Ingot Fused Connection Units With Optional Flex Outlet

550 13A Ingot Fused Connection Unit

551 13A Ingot DP Switched Fused Connection Unit

13A Ingot DP Switched Fused Connection Unit

553 13A Ingot Fused Connection Unit With Neon

Ingot Fused Connection Units Without Flex Outlet

750

750 13A Ingot Fused Connection Unit

751 13A Ingot DP Switched Fused Connection Unit

13A Ingot DP Switched Fused Connection Unit

753 13A Ingot Fused Connection Unit With Neon

Standards: BS 1363-4 BS 1362

Back Box Depth: 25mm Minimum Cable Size: 3 x 2.5mm² or 2 x 4mm²

Dimensions: 88mm (W) x 88mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.













Ingot 20A Control Switches With Optional Flex Outlet

520 10A Ingot 3 Pole Fan Isolation Plate Switch 522 20A Ingot DP Switch

523 20A Ingot DP Switch With Neon

Ingot 20A Control Switches Without Flex Outlet

722 20A Ingot DP Switch

723 20A Ingot DP Switch With Neon



Ingot Fan Isolation Switch

This Product Is Not Modular

Back Box Depth: 10A: 16mm Minimum 20A: 25mm Minimum Cable Size: 10A: 4 x 1.5mm² or 2 x 2.5mm² 20A: 3 x 2.5mm² Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.





503



502



505

Ingot 45A Switches And Socket Outlets

500 45A Ingot 1 Gang DP Switch

501 45A Ingot 1 Gang DP Switch With Neon

502 45A Ingot 2 Gang DP Switch

503 45A Ingot 2 Gang DP Switch With Neon

504 45A Ingot 2 Gang DP Switch With 13A DP Switched Socket

505 45A Ingot 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: 500 501 502 503: BS EN 60669-1 504 505: BS 4177

Back Box Depth: 35mm Minimum Cable Size: 45A: 1 x 16mm²

Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)

502 503: 88mm (W) x 146mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour

AB Antique Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.





Two keys provided (Spare keys available: SP660).

Ingot Lockable Sockets

13A Ingot 1 Gang DP Key Lockable Socket With Neon

Lockable Switches

660 20A Double Pole Key Lockable Switch

Standards: BS EN 60669-1 655: BS 1363-2 Back Box Depth: 35mm Minimum Cable Size: 3 x 2.5mm² or 2 x 4mm² Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.

Television, Telephone and Data Sockets

RJ11 Outlet | UK Telephone outlets Satellite Socket Outlets | Coaxial Sockets

The following pages contain details of Deco Plus® products designed to deal with handling data and media transfer through telephone, computer, television or radio.

As well as the finished products please also find details of unfurnished mounting plates designed to accept custom selections of New Media™ modules from our dedicated modules brochure.











157 | 170







121 | 126

Twin outlets are 2 separate sockets and are not internally linked together.

RJ11 Telephone Outlets

CLICK® WIRING ACCESSORIES

115 Single RJ11 (Irish/US) Outlet

Telephone Outlets

120 Single Telephone Outlet - Master

121 Twin Telephone Outlet - Master

125 Single Telephone Outlet - Secondary

126 Twin Telephone Outlet - Secondary

Back Box Depth: 16mm Minimum 115: 35mm Minimum Termination Type: 115: Screw 120 121 125 126: IDC Dimensions: 88mm (W) x 88mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.

Isolated outlets will filter out any interference.

065 | 158

If a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Non-isolated Coaxial Outlets (Unshielded)

065 Single Coaxial Outlet

066 Twin Coaxial Outlet

Isolated Coaxial Outlets (Unshielded)

158 Single Isolated Coaxial Outlet

159 Twin Isolated Coaxial Outlet

Satellite Outlets (Unshielded)

156 Non-isolated Single Satellite Outlet

157 Isolated Satellite & Isolated Coaxial Outlet

170 Non-isolated Satellite & Non-isolated Coaxial Outlet

Back Box Depth: 16mm Minimum Dimensions: 88mm (W) x 88mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts DP - Plate Style BN - Plate Finish 536 - Product No. BK - Insert Colour AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.







Solutions for media cabling

Selecting from a range of module inserts covering all manner of media transfer, installers will now be able to configure their own arrangement of television, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates and fitted onto standard switch and socket boxes.



The New Media[™] range provides the installer with All modules are available in white or black finishes























All plates supplied with black and white gaskets where applicable. Above are some examples of New Media™ modules we offer, please see our dedicated New Media™ section for more information on the range of modules available.

Unfurnished Plates - New Media™

1 Gang New Media™ Unfurnished Plate - 1 Aperture 1 Gang New Media™ Unfurnished Plate - 2 Apertures

2 Gang New Media™ Unfurnished Plate - 4 Apertures

Standards: BS 5733

Back Box Depth: Dependent On Modules Fitted

Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)

Understanding the code:
DP - Plate Style BN - Plate Finish 536 - Product No.















MCP086

MCP085

WA672

For the complete range of back boxes see Essentials™ page M24.

Surface Mounting Boxes - Metal Clad Grey

MCP085 1 Gang 40mm Deep Mounting BoxMCP086 2 Gang 40mm Deep Mounting Box

Galvanised Boxes

WA370 1 + 1 35mm Deep Dual Accessory Box (Deco® Range Only)
 WA375 1 + 2 35mm Deep Dual Accessory Box (Deco® Range Only)
 WA671 1 Gang 25mm Deep Architrave Box With 60.3mm Hole Centres
 WA672 2 Gang 25mm Deep Architrave Box With 120.6mm Hole Centres

Standards: BS 4662

Dimensions: 085: 88mm (W) x 88mm (H) x 40mm (D) 086: 146mm (W) x 88mm (H) X 40mm (D) 370: 168mm (W) x 74mm (H) x 35mm (D) 375: 228mm (W) x 74mm (H) X 35mm (D) 671: 30mm (W) x 73mm (H) x 25mm (D) 672: 30mm (W) x 135mm (H) X 25mm (D)