



Decorative Flat Plate
Electrical Accessories

define®



define®

Decorative Flat Plate Electrical Accessories in Various Plate Finishes

Define® unique product codes

When ordering any Define® products, please specify the required finish by following the simple code structure as demonstrated here.

FP	BN	411	BK
Plate Style	Product Finish	Product Number	Insert Colour

Contents

Switches	D5
Power Socket Outlets	D11
13A Fused Connection Units	D13
Control Switches	D16
Socket & Blank Plates	D17
Telephone & Data Sockets	D20
TV & Satellite	D21
New Media™ Plates	D22
Galvanised Boxes	D23
Dry Lining Boxes	D24

Conventional plate accessory design with a standard 6mm return on the plate depth, limits the design opportunities in many installations by virtue of the fact that the plate becomes the feature instead of complementing the features of the decoration in a room.

The Define® flat plate range of accessories offers up a host of new design opportunities with a comprehensive range of electrical accessory products available in 5 different decorative plate finishes. Define® plates are coated stainless steel.

The comprehensive range of products includes plate switches of different construction, including traditional 'dolly' style, contemporary self coloured Ingot switches and, of course, rotary dimmer switches. The modular construction of the standard moulded Click® range of switches has been incorporated into the Define® range.

When used in conjunction with the Minigrd® range of blank mounting plates, customised switching solutions can easily be created with a wide selection of module options.

Amongst the socket range can be found standard switched 13A sockets plus 2A and 5A round pin sockets for dedicated lighting circuits etc...

Different configurations of fused connection units and control switches, with 45A switches and assorted data and media accessories all contribute to an exciting and aesthetically pleasing wiring solution offered by the high quality Define® product group.



All Define® products are available with black or white inserts, excluding black nickel finishes which are supplied with black insert. Every Define® product featured in the pages of this brochure is available in 5 distinctive quality finishes: Polished Chrome, Stainless Steel, Brushed Stainless*, Pearl Nickel and Black Nickel

*UK Design Registration 3015621




Switches

Modular Switches – the standard switch modules used in the Define® product are self coloured Ingot style switches which feature single screw fixing to the face plate.

Design flexibility is enhanced by availability of multi-function and fully interchangeable modules from the MiniGrid® range.

These non-furnished 1 & 2 gang plates offer the installer unprecedented flexibility in creating customised switch arrangements. A simple single screw fixing secures the required modules in position. A host of switching options can be achieved by selecting from our range of interchangeable modules.



All Define® switch plates are modular as standard, allowing you to create virtually any switch plate you require e.g. Two way switch next to an intermediate switch (shown above).

Modular Ingot Plate Switches
Dimmer Switches | Toggle Switches



411



412



413



414



416

MINIGRID® For interchangeable MiniGrid® modules - see page J18.

Ingot Plates Switches - MiniGrid®

- 411 10AX Ingot 1 Gang 2 Way Plate Switch
- 412 10AX Ingot 2 Gang 2 Way Plate Switch
- 413 10AX Ingot 3 Gang 2 Way Plate Switch
- 414 10AX Ingot 4 Gang 2 Way Plate Switch
- 416 10AX Ingot 6 Gang 2 Way Plate Switch

Ingot Plates Switches - MiniGrid®

- 425 10AX Ingot 1 Gang Intermediate Plate Switch


Define® plates are coated stainless steel

Standards: BS EN 60669-1
Back Box Depth: 25mm Minimum Cable Size: 4 x 1.5mm² or 2 x 2.5mm²
Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 1.3mm (D) 2 Gang: 146mm (W) x 88mm (H) x 1.3mm (D)

Understanding the code:
FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour.
BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel



401 402 403

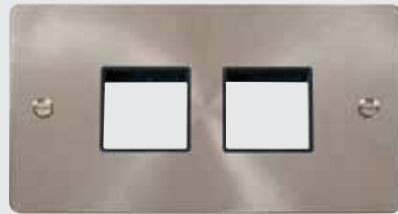

404



406 426



140 161 152 162



153 163 154 164



For MiniGrid® modules - see page J18.



Interchangeable modules available on page J37.

Unfurnished Plates - MiniGrid®

- 401 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
- 402 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
- 403 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
- 404 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
- 406 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
- 426 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures

Dimmer Switches (Leading Edge)

- 140 1 Gang 2 Way 400Va Dimmer Switch
- 152 2 Gang 2 Way 400Va Dimmer Switch
- 153 3 Gang 2 Way 400Va Dimmer Switch
- 154 4 Gang 2 Way 400Va Dimmer Switch

Dimmer Switches (Trailing Edge)

- 161 1 Gang 2 Way 100W Dimmer Switch
- 162 2 Gang 2 Way 100W Dimmer Switch
- 163 3 Gang 2 Way 100W Dimmer Switch
- 164 4 Gang 2 Way 100W Dimmer Switch

We recommend the use of branded halogen lamps with all Define® leading edge dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. These dimmer switches have not been designed to use with LED lamps. However, they may be suitable for some good quality LED lamps. For further information please contact Click® Technical support team.
We recommend the use of branded LED lamps with all Define® trailing edge dimmers.

Standards: BS 5733
Back Box Depth: Dependent On Modules Fitted
Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 1.3mm (D) 2 Gang: 146mm (W) x 88mm (H) x 1.3mm (D)

Standards: BS EN 60669-1 BS EN 55015 BS EN 61000-3-2 400Va: BS EN 61000-3-3 100W: BS EN 60669-2-1
Type: 400Va: Leading Edge 100W: Trailing Edge
Back Box Depth: 35mm Minimum Cable Size: 2 x 1.5mm²
Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 1.3mm (D) 2 Gang: 146mm (W) x 88mm (H) x 1.3mm (D)

Understanding the code:
FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour.
BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel

Understanding the code:
FP - Plate Style BN - Plate Finish 411 - Product No. Please note: Supplied with both black & white gaskets (BN supplied with black gaskets only).
BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel



140PL



152PL



153PL



185



186

Dimmer Modules

- MD9001 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
- MD9010 1-10V Analogue Dimmer Module (25 x 62mm)
- MD9022 250W 2 Leading Edge Way Dimmer Module (25 x 62mm)
- MD9042 400W 2 Way Leading Edge Dimmer Module (25 x 62mm)
- MD9014 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)



SP900



MD9014

Dimmer M10 Nut Runner

- SP900 Dimmer M10 Nut Runner Tool

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate

Dimmer Mounting Unfurnished Plates

- 140PL 1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture
- 152PL 2 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures
- 153PL 3 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures
- 154PL 4 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures
- 185 1 Gang Dimmer Plate & Knob (1000W Max) - 1 Aperture
- 186 2 Gang Dimmer Plate & Knobs (1630W Max) - 2 Apertures

Standards: BS 5733

Back Box Depth: Dependent On Modules Fitted

Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 1.3mm (D) 2 Gang: 146mm (W) x 88mm (H) x 1.3mm (D)

Understanding the code:

FP - Plate Style BN - Plate Finish 411 - Product No. Please note: Supplied with both black & white gaskets (BN supplied with black gaskets only).
BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel



421



MD9125



422



423



424

Brushed Stainless & Stainless Steel plate finishes require the use of a Pearl Nickel (PN) Toggle Switch Module.

Toggle Switches

- 421 10AX 1 Gang 2 Way Toggle Switch
- 422 10AX 2 Gang 2 Way Toggle Switch
- 423 10AX 3 Gang 2 Way Toggle Switch
- 424 10AX 4 Gang 2 Way Toggle Switch

10AX Intermediate Toggle Switch Modules

- MD9125BN Intermediate Toggle Switch Module - Black Nickel
- MD9125CH Intermediate Toggle Switch Module - Polished Chrome
- MD9125PN Intermediate Toggle Switch Module - Pearl Nickel

Not interchangeable with dimmers or other MiniGrid® modules.

Standards: BS EN 60669-1

Back Box Depth: 35mm Minimum Cable Size: 4 x 1.5mm² or 2 x 2.5mm²

Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 1.3mm (D) 2 Gang: 146mm (W) x 88mm (H) x 1.3mm (D)

Understanding the code:

FP - Plate Style BN - Plate Finish 411 - Product No. Please note: Supplied with both black & white gaskets (BN supplied with black gaskets only).
BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel

Power Socket Outlets, Fused Connection Units & Control Switches

With the ever increasing demand for power supplies in all areas of the home comes the problem of selecting and fitting outlets which blend harmoniously with the décor of the room in which they are to be fitted. The 5 different Define® plate finishes offer a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...

13A Wall Socket Outlets | Wall Socket Outlets Round Pin
Fused Connection Units | Fan Isolation Switches
DP Switches



535



536



1535



1536



1836

Ingot Switched Socket Outlets

- 535 13A Ingot 1 Gang DP Switched Socket
- 536 13A Ingot 2 Gang DP Switched Socket (Twin Earth)
- 1535 13A Ingot 1 Gang DP 3 Pin Safety Shutter Switched Socket Outlet
- 1536 13A Ingot 2 Gang DP 3 Pin Safety Shutter Switched Socket Outlet (Twin Earth)

Ingot Switched Safety Shutter Socket Outlets With Outboard Rockers

- 1836 13A Ingot 2 Gang DP 3 Pin Safety Shutter Outboard Switched Socket Outlet (Twin Earth)

Standards: BS 1363-2

Cable Size: 3 x 2.5mm² or 2 x 4mm² Back Box Depth: 35mm Minimum

Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 1.3mm (D) 2 Gang: 146mm (W) x 88mm (H) x 1.3mm (D)

Understanding the code:

FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour.

BS - Brushed Stainless, BN - Black Nickel, PN - Pearl Nickel, CH - Polished Chrome and SS - Stainless Steel



655



570



580



586



571U



038



039

Ingot Switched Sockets With USB Outlet

- 571U 13A Ingot 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
- 570 13A Ingot 2 Gang Switched Sockets With 2.1A USB Outlet (Twin Earth)
- 580 13A Ingot 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)
- 586 13A Ingot 2 Gang Switched Safety Shutter Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)

Round Pin Socket Outlets

- 038 5A Round Pin Socket
- 039 2A Round Pin Socket

Ingot Lockable Sockets

- 655 13A Ingot 1 Gang DP Key Lockable Socket With Neon
Two keys provided (Spare keys available: SP660)

Standards: 038 039: BS 546 655: BS EN 60669-1 BS 1363-2
570 571U 580 586: BS 1363-2: 2016 +A1: 2018 BS EN IEC 62368-1 BS EN 62680-1-1
Cable Size: 038: 4 x 1.5mm² or 3 x 2.5mm² 039: 3 x 1.5mm² 570 571U 580 586 655: 3 x 2.5mm² or 2 x 4mm²
Back Box Depth: 038 039: 25mm Minimum 570 571U 580 586: 35mm Minimum 655: 47mm
Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 1.3mm (D) 2 Gang: 146mm (W) x 88mm (H) x 1.3mm (D)

Understanding the code:
FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour.
BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel



550



551



552



553



750



751



752



753

Ingot Fused Connection Units With Optional Flex Outlet


- 550 13A Ingot Fused Connection Unit
- 551 13A Ingot DP Switched Fused Connection Unit
- 552 13A Ingot DP Switched Fused Connection Unit With Neon
- 553 13A Ingot Fused Connection Unit With Neon

Ingot Fused Connection Units Without Flex Outlet

- 750 13A Ingot Fused Connection Unit
- 751 13A Ingot DP Switched Fused Connection Unit
- 752 13A Ingot DP Switched Fused Connection Unit With Neon
- 753 13A Ingot Fused Connection Unit With Neon

Standards: BS 1363-4 BS 1362
Cable Size: 3 x 2.5mm² or 2 x 4mm²
Back Box Depth: 35mm Minimum
Dimensions: 86mm (W) x 86mm (H) x 1.3mm (D)

Understanding the code:
FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour.
BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel

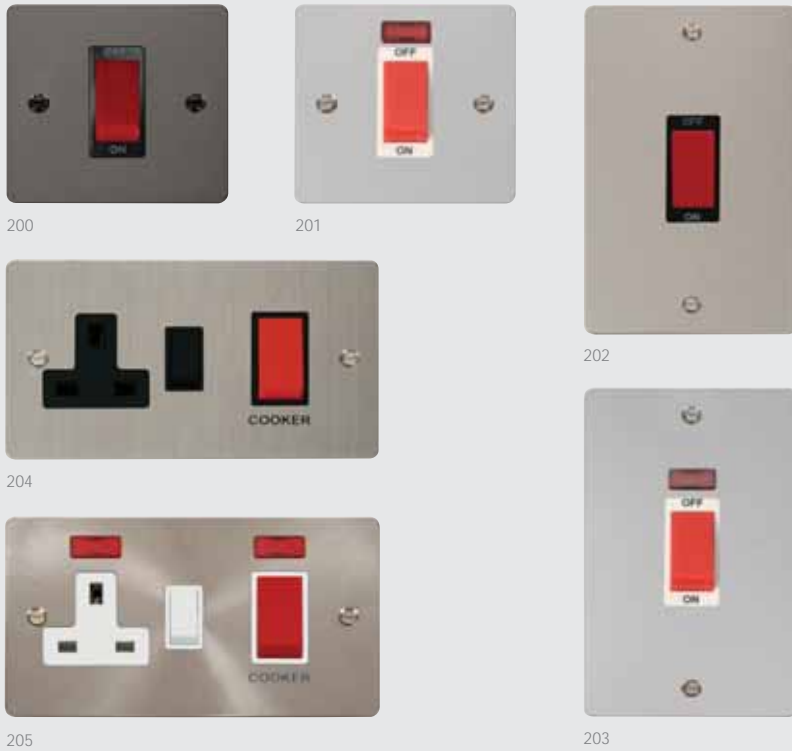

45A Switches And Socket Outlets

- 200 45A 1 Gang DP Switch
- 201 45A 1 Gang DP Switch With Neon
- 202 45A 2 Gang DP Switch
- 203 45A 2 Gang DP Switch With Neon
- 204 45A 2 Gang DP Switch With 13A DP Switched Socket
- 205 45A 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: 200 201 202 203: BS EN 60669-1 204 205: BS 4177
 Back Box Depth: 47mm Cable Size: 1 x 16mm²
 Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 1.3mm (D) 2 Gang: 146mm (W) x 88mm (H) x 1.3mm (D)
 202 203: 88mm (W) x 146mm (H) x 1.3mm (D)

Understanding the code:
 FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour.
 BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel



Ingot 45A Switches And Socket Outlets

- 500 45A Ingot 1 Gang DP Switch
- 501 45A Ingot 1 Gang DP Switch With Neon
- 502 45A Ingot 2 Gang DP Switch
- 503 45A Ingot 2 Gang DP Switch With Neon
- 504 45A Ingot 2 Gang DP Switch With 13A DP Switched Socket
- 505 45A Ingot 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: 500 501 502 503: BS EN 60669-1 504 505: BS 4177
 Back Box Depth: 47mm Cable Size: 1 x 16mm²
 Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 1.3mm (D) 2 Gang: 146mm (W) x 88mm (H) x 1.3mm (D)
 502 503: 88mm (W) x 146mm (H) x 1.3mm (D)

Understanding the code:
 FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour.
 BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel



520



522



060



523



660



722



723



061



100

Ingot Fan Isolation Switch

520 10A Ingot 3 Pole Fan Isolation Plate Switch
This product is not modular

Ingot 20A Control Switches With Optional Flex Outlet

522 20A Ingot DP Switch
523 20A Ingot DP Switch With Neon

Lockable Switches

660 20A Double Pole Key Lockable Switch
Two keys provided (Spare keys available: SP660)

Ingot 20A Control Switches Without Flex Outlet

722 20A Ingot DP Switch
723 20A Ingot DP Switch With Neon
3 pole and 20A DP switches are non-modular

Blank Plates

060 1 Gang Blank Plate
061 2 Gang Blank Plate

Dual Voltage Shaver Socket

100 115/230V Dual Voltage Shaver Socket

Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5:2010 making it safe for use in bathrooms. Shaver outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.

Standards: BS EN 60669-1 Back Box Depth: 35mm Minimum 520: 25mm Minimum 660: 47mm
Cable Size: 520: 4 x 1.5mm² or 2 x 2.5mm² 522 523 722 723: 3 x 2.5mm² 660: 3 x 2.5mm² or 2 x 4mm²
Dimensions: 86mm (W) x 86mm (H) x 1.3mm (D)

Understanding the code:
FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour.
BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel

Standards: 060 061: BS 5733 100: BS EN IEC 61558-1 BS EN 61558-2-5
Back Box Depth: 060: 16mm Minimum 061: 25mm Minimum 100: 47mm Cable Size: 100: 2 x 1.5mm² or 1 x 2.5mm²
Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 1.3mm (D) 2 Gang: 146mm (W) x 88mm (H) x 1.3mm (D)
100: 88mm (W) x 146mm (H) x 1.3mm (D)

Understanding the code:
FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour.
BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel

TV, Telephone & Data Sockets

The following pages contain details of Define® products designed to deal with handling data and media transfer through telephone, computer, TV or radio.

As well as the finished products please also find details of unfurnished mounting plates designed to accept custom selections of New Media™ modules from our dedicated modules section.



RJ11 Outlet | UK Telephone Outlets
Satellite Socket Outlets | Coaxial Sockets



115



120 / 125



121 / 126

RJ11 Telephone Outlet

115 Single RJ11 (Irish/US) Outlet

Telephone Outlets

- 120 Single Telephone Outlet - Master
- 121 Twin Telephone Outlet - Master
- 125 Single Telephone Outlet - Secondary
- 126 Twin Telephone Outlet - Secondary

Twin outlets are 2 separate sockets and not internally linked together.

Back Box Depth: 120 121 125 126: 25mm Minimum 115: 47mm
Termination Type: 120 121 125 126: IDC 115: Screw
Dimensions: 86mm (W) x 86mm (H) x 1.3mm (D)

Understanding the code:
FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour.
BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel



156



157



158



159

Satellite Outlets (Unshielded)

- 156 Non-isolated Single Satellite Outlet
- 157 Isolated Satellite & Isolated Coaxial Outlet

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Non-isolated Coaxial Outlets (Unshielded)

- 065 Single Coaxial Outlet
- 066 Twin Coaxial Outlet

Isolated Coaxial Outlets (Unshielded)


- 158 Single Isolated Coaxial Outlet
- 159 Twin Isolated Coaxial Outlet

Back Box Depth: 156 157 158 159: 25mm Minimum 065 066: 16mm Minimum
Dimensions: 86mm (W) x 86mm (H) x 1.3mm (D)

Understanding the code:
FP - Plate Style BN - Plate Finish 411 - Product No. BK - Insert Colour.
BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel



311

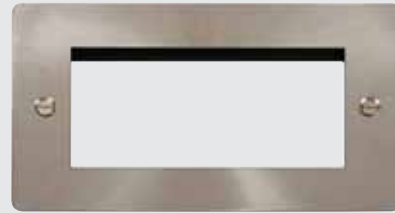

312



310



MM410BK MM405WH MM501BK MM440BK

See our dedicated New Media™ section for more information on the range of New Media™ modules available.



Unfurnished Plates - New Media™

- 310 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- 311 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- 312 2 Gang New Media™ Unfurnished Plate - 4 Apertures

Selecting from a range of module inserts covering all manner of media transfer, the installer will now be able to configure their own arrangement of TV, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates, fitted onto standard switch and socket boxes.

Standards: BS 5733
 Back Box Depth: Dependent On Modules Fitted
 Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 1.3mm (D) 2 Gang: 146mm (W) x 88mm (H) x 1.3mm (D)

Understanding the code:
 FP - Plate Style BS - Plate Finish 310 - Product No.
 BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel



WA092



SP640



WA094



WA095



WA099



WA102

essentials™

For the complete range of back boxes see Essentials™ page M4.

Galvanised Steel Back Boxes

- WA092 1 Gang 16mm Deep Galvanised Steel K.O. Box
- WA093 1 Gang 25mm Deep Galvanised Steel K.O. Box
- WA094 2 Gang 25mm Deep Galvanised Steel K.O. Box
- WA095 1 Gang 35mm Deep Galvanised Steel K.O. Box
- WA096 2 Gang 35mm Deep Galvanised Steel K.O. Box
- WA097 1 Gang 47mm Deep Galvanised Steel K.O. Box
- WA098 2 Gang 47mm Deep Galvanised Steel K.O. Box
- WA099 1 + 1 35mm Deep Dual Accessory Box
- WA102 1 + 2 35mm Deep Dual Accessory Box

Longer Fixing Screws

- SP640BN Define® 3.5mm Dia. 40mm Long Screws (Bag 100)
- SP640CH Define® 3.5mm Dia. 40mm Long Screws (Bag 100)
- SP622 Define® M3.5 Security Screw 22mm Long (Bag 100)
 Require 2mm security allen key/driver.

Standards: BS 4662 640: ISO 2010
 Dimensions: 092: 70mm x 70mm x 16mm 093: 70mm x 70mm x 25mm 094: 135mm x 70mm x 25mm 095: 70mm x 70mm x 35mm 096: 135mm x 70mm x 35mm 097: 70mm x 70mm x 47mm 098: 135mm (W) x 70mm (H) x 47mm (D) 099: 158mm (W) x 74mm (H) x 35mm (D) 102: 220mm (W) x 74mm (H) x 35mm (D)



WA106P



GA100



WA107P



WA4135



WA4247

essentials™

For the complete range of FlameGuard® back boxes see Essentials™ page M8.

Dry Lining Boxes

- WA087P** 1 Gang 35mm Deep Dry Lining Box
- WA088P** 2 Gang 35mm Deep Dry Lining Box
- WA106P** 1 Gang 47mm Deep Dry Lining Box
- WA107P** 2 Gang 47mm Deep Dry Lining Box
- WA108P** Round Ceiling 34mm Deep Dry Lining Box

FlameGuard® Dry Lining Boxes

- WA4135** 1 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4235** 2 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4147** 1 Gang 47mm Deep FlameGuard® Dry Lining Box
- WA4247** 2 Gang 47mm Deep FlameGuard® Dry Lining Box

'Ezylink' Dry Lining Box Connector

- GA100** 'Ezylink' Dry Lining Box Connector

FlameGuard® back boxes have been tested and conform to both fire and acoustic BS EN standards.
 Fire: BS EN 1364-1 Acoustic: BS EN ISO 140-2. Complies with Building Regulations Fire tested up to 90 minutes with the capability of the boxes being mounted back to back.