



Interchangeable Plates  
& Modules

**GRIDPRO**



## GRIDPRO®

Interchangeable Plates & Modules

### Contents

New Features	15	Define® and Metal Clad Assembly Guide	I108
Clip Feature Assembly Guide	I20	Define® Frontplates	I110
Screw Feature Assembly Guide	I22	Deco® Frontplates	I118
Modules	I26	Mode® Frontplates	I126
Dimmer Mounting Kits	I84	Part M™ Frontplates	I132
Deco Plus® Frontplates	I91	Polar™ Frontplates	I134
Definity™ Assembly Guide	I100	Metal Clad Frontplates	I140
Definity™ Frontplates	I102	Yokes and Back Boxes	I145

Now introducing the new range of GridPro® frontplates and modules. A comprehensive range of finishes and modules available to offer ultimate flexibility.

As well as a wide range of modules to choose from all of our switch modules are 20A rated so they are ideal for both domestic and commercial applications.

The GridPro® range will complement your existing Click® installation, as the range was specifically designed to seamlessly match our existing ranges of Click® wiring accessories.



Ideal for isolation of kitchen appliances!

# One Module Fits All

...via a clipping feature & screw attachment on each module.

## Clipping feature

Allows easy removal and assembly of the module onto a grid Yoke by hand or small tool.

## Screw attachment feature

Allows the modules to be assembled onto 1 - 4 gang GridPro® frontplates without a yoke.




Ergonomic front mounting module  
Designed with a large radius on the corners, allowing easy assembly.

# Ergonomic Modules



...every pro needs.

Large filleted terminal cable entry holes accepts 2 x 4mm<sup>2</sup> cable.

All modules come with backed off captive terminal screws for ease of assembly.

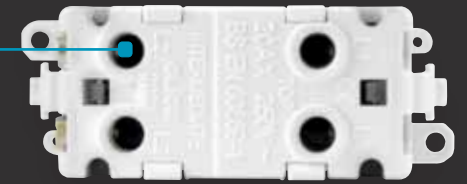

A screwdriver guide ensures the screwdriver easily locates with terminal screw head to clamp cable in position. The terminal screw apertures are designed to help guide the tool.

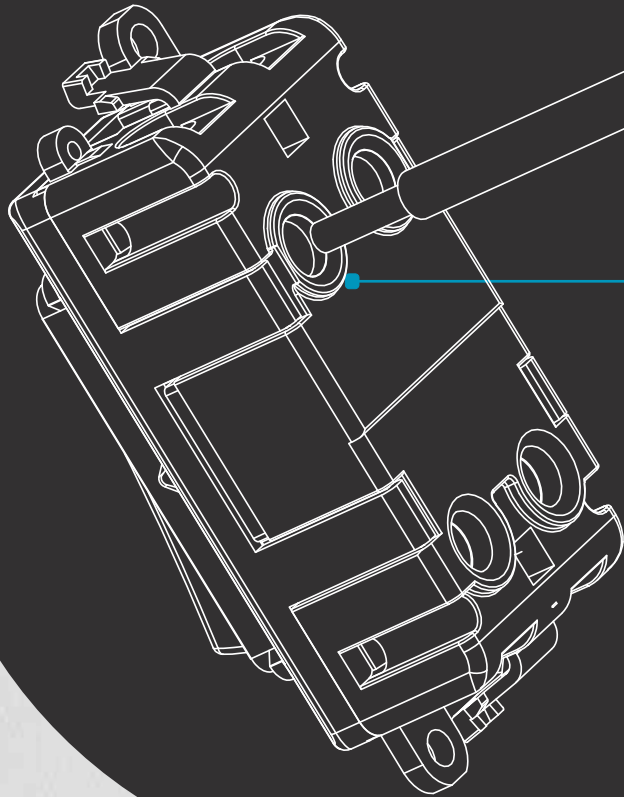

**GRIDPRO**



Our new range features design elements that enable quicker and easier installation whilst maintaining all the key features and stylish design of the existing range of Click® wiring accessories. When a yoke is required for the larger GridPro® frontplates another unique feature of our modules is the clip on the top and bottom of the module, which allows easy removal and assembly of the module onto a grid Yoke by hand or a small tool. Our GridPro® modules do not require a special back box so can be used with standard BS4662 Back Boxes.






# No Yoke!

...for 1-4 gang GridPro® frontplates.

The GridPro® modules are secured to the back of the 1 - 4 gang GridPro® frontplates via the screw feature on the modules\*. The benefit of not using a yoke is that it allows the installer to use standard back boxes!

\*excluding the screwless Definity™ GridPro® frontplates, which have their own dedicated inserts.

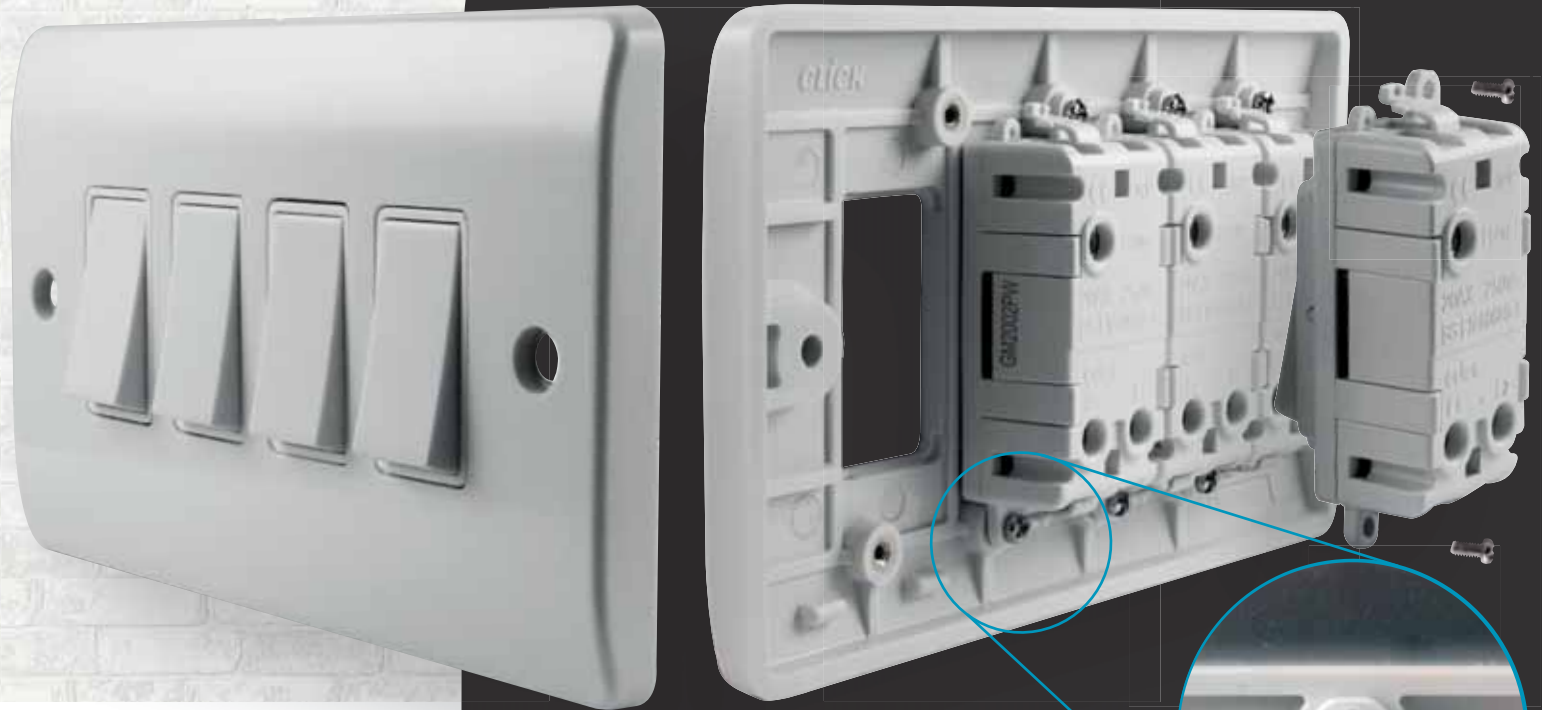

For use with 1 - 4 gang GridPro® frontplates\*...



\*excluding the screwless Definity™ GridPro® frontplates, which have their own dedicated inserts.


Screw directly on to the back of 1-4 gang GridPro® frontplates!



# Clip-On Modules

...for fast and easy installation.


When a yoke is required on the multi tier GridPro® frontplates the module can be assembled using the clip attachment, which secures them to the metal yokes.

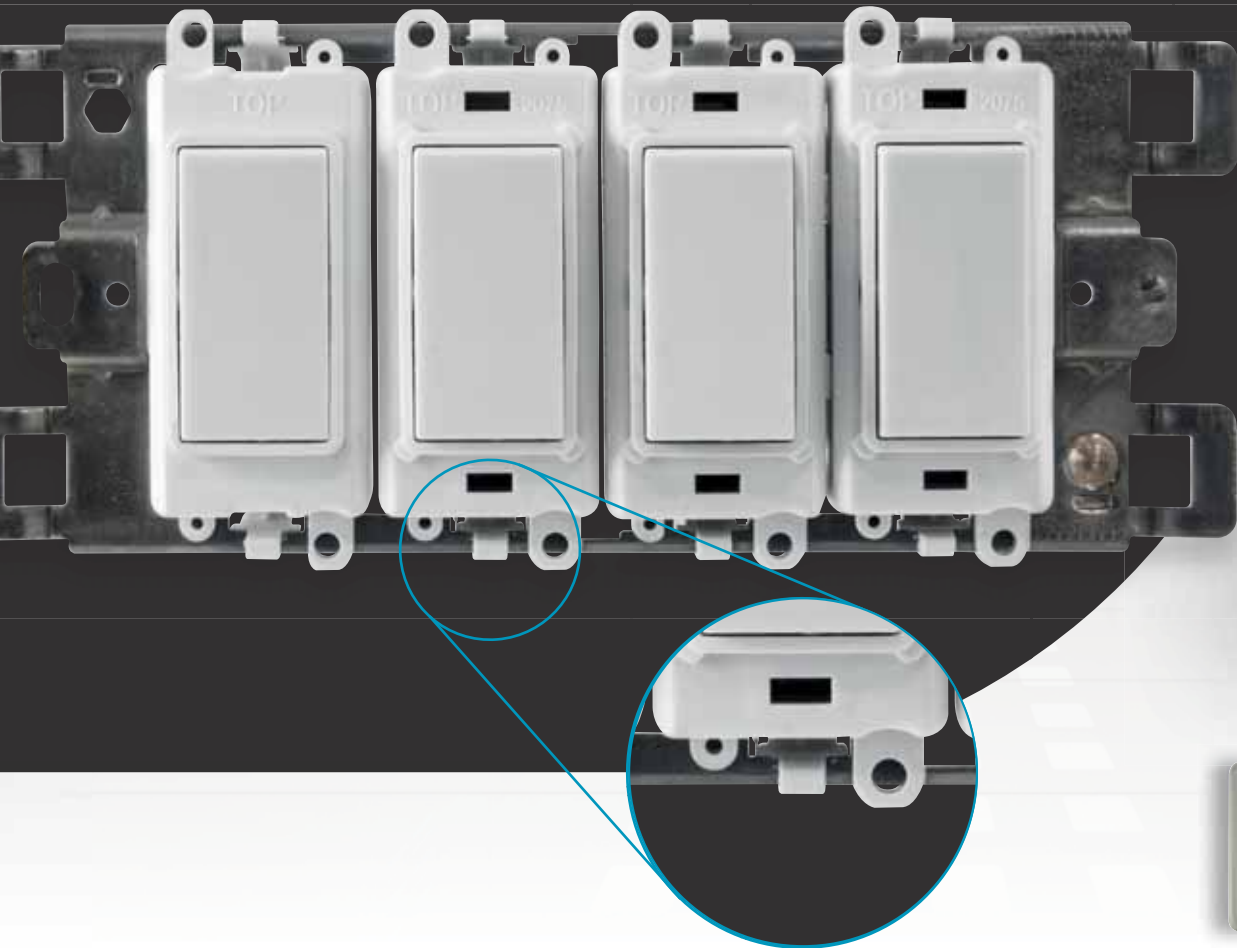

For use with 6 - 24 gang GridPro® frontplates\*...




\*excluding the screwless Definity™ GridPro® frontplates, which have their own dedicated inserts.

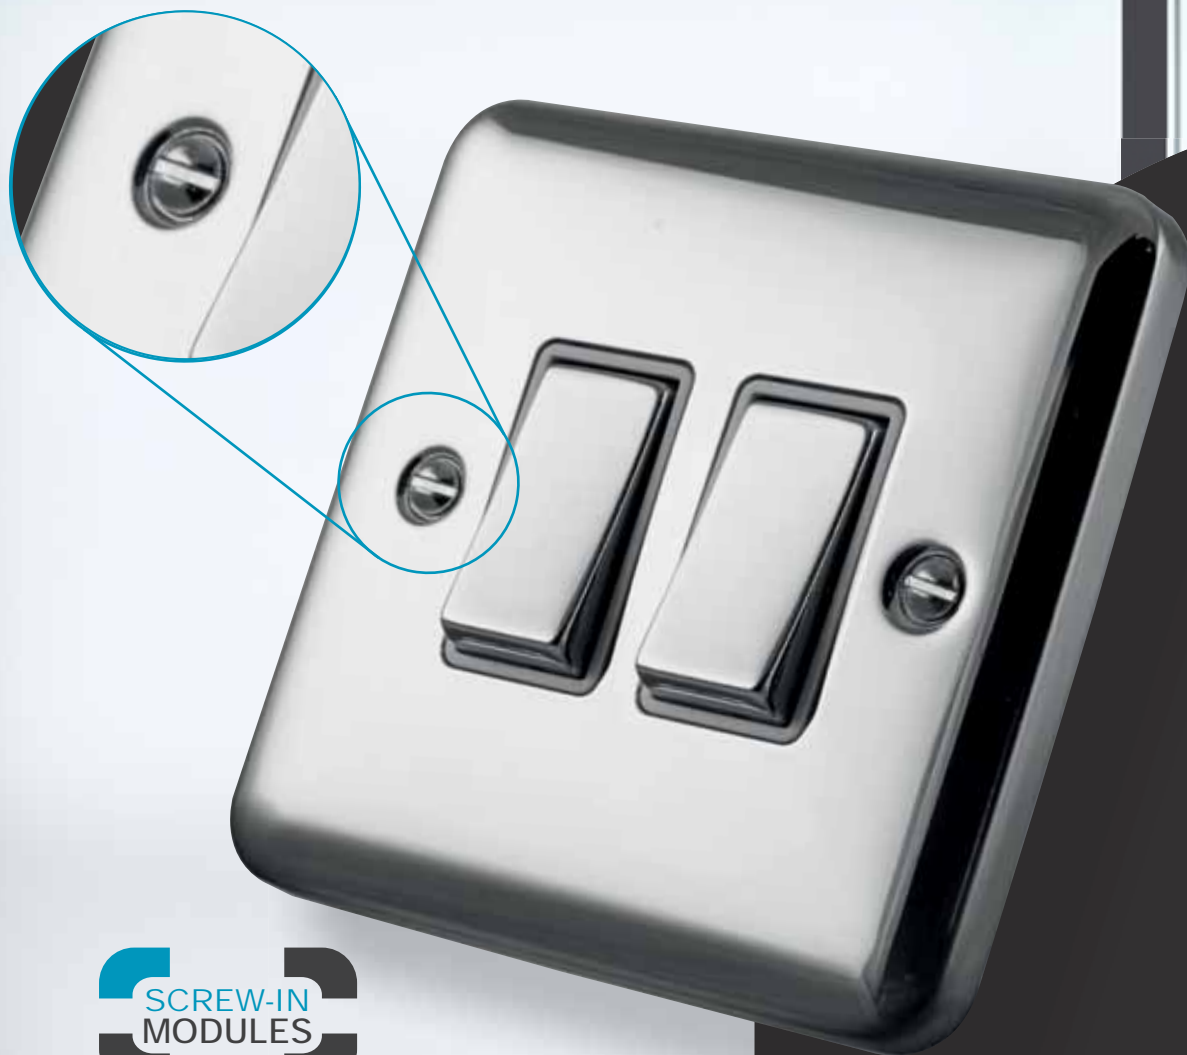

## Horizontal Fixing Screws

...on all GridPro® frontplates.

GridPro® frontplates have horizontal mounted screws to give a uniform, aesthetic look throughout the range.



No Yoke needed  
on 1 - 4 gang  
GridPro® frontplates!



Screw modules directly onto the back of  
1-4 gang GridPro® frontplates\*.



\*excluding the screwless Definity™ GridPro® frontplates, which have their own dedicated inserts.





# Antibacterial & Antiviral Certified Products

The antimicrobial symbol is shown on all pages where products are protected by this feature.

Mode®, Polar™ & Part M™ plates have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses.

After a contact period of 4 hours, Mode®, Polar™ & Part M™ was shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.

Mode®, Polar™ & Part M™ wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.



**MODE®** *polar™* **Part M Range™**



# Standard BS4662 Back Boxes

...are all you need.

A unique feature of 1 - 4 gang GridPro® frontplates is that any British Standard BS4662 flush mounted back boxes can be used. This is because our 1 - 4 gang GridPro® frontplates do not require a yoke!\*



\*excluding the screwless Definity® GridPro® frontplates, which have their own dedicated inserts.




# Universal Yokes

snap off tabs.

Removal of the end tabs allows the GridPro® yoke to be universal, therefore it may be used for any Click® plate styles\* including Define® and Metal Clad variants.

\*excluding the Definity™ GridPro® frontplates, which have their own dedicated inserts.

Remove tabs with a simple snap to allow the yoke to fit within the back box.

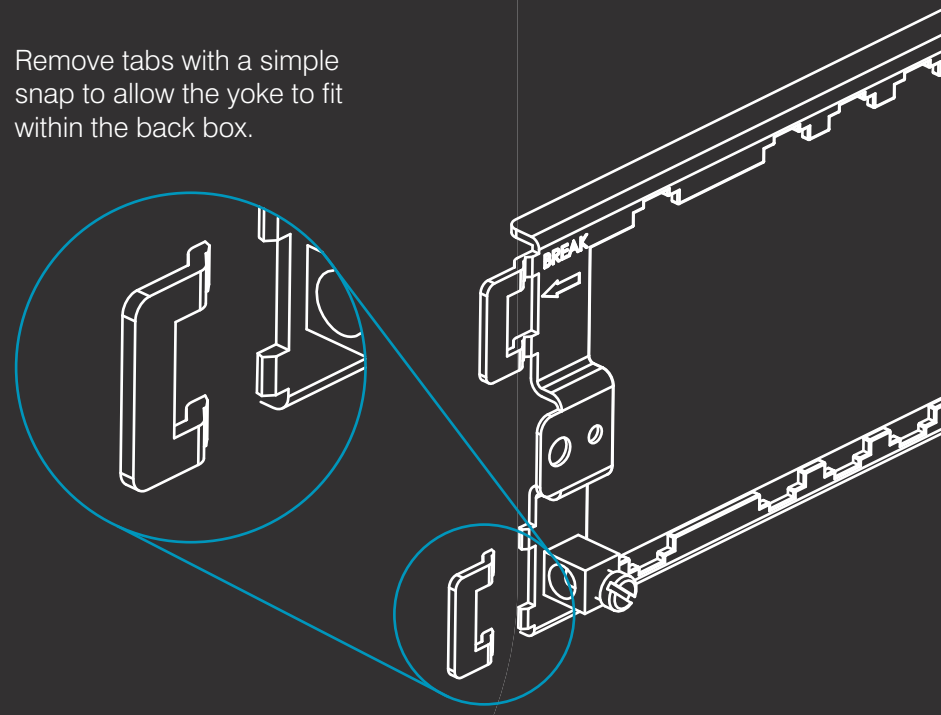


# Clip Feature Assembly

GRIDPRO®

MODE® polar™ deco® deco PLUS®

1. Fit and secure appropriate back box and yoke, (for Define® and Metal Clad remove tabs on yoke). Pull the cable through yoke and strip insulation accordingly. Ensure an earth connection between frame and yoke (if required).

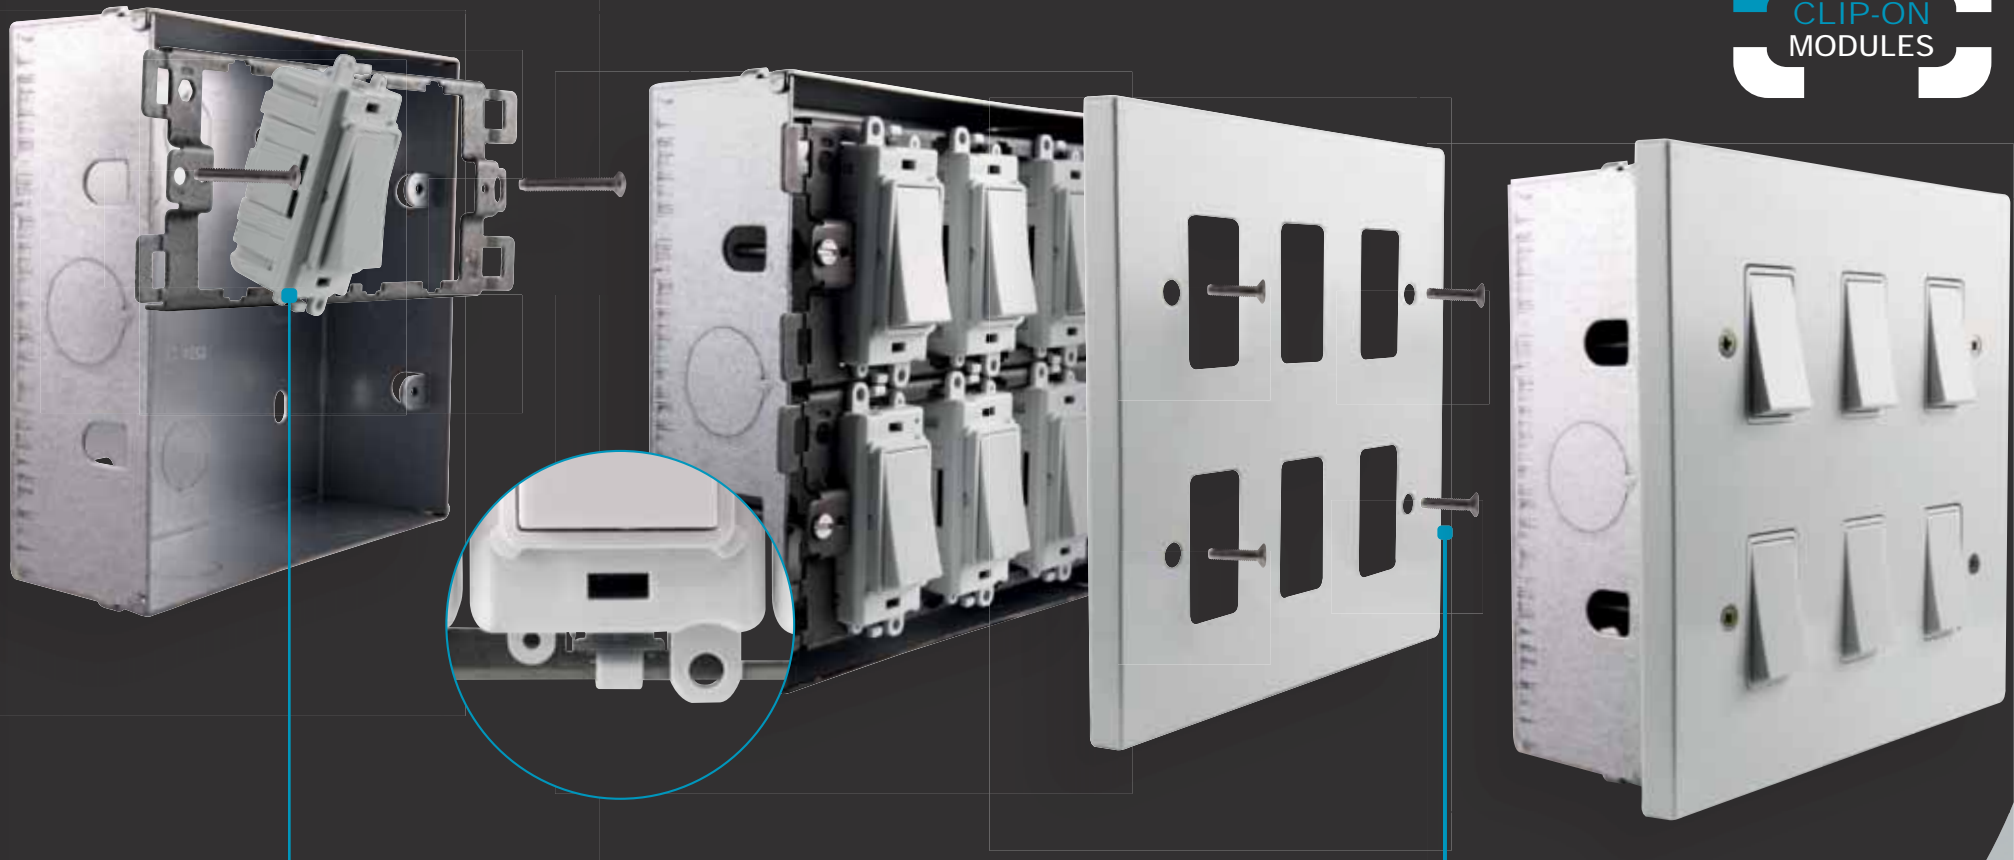

2. Systematically terminate cables into each module. Clip modules into yoke with a pivot motion.


3. Attach GridPro® frontplate using the fixing screws provided.

# Screw Feature Assembly

GRIDPRO®

1. Fit and secure appropriate back box, pull cable through frame and strip insulation accordingly.

essentials™ define™ Part M Range™ **MODE** *polar* deco deco PLUS

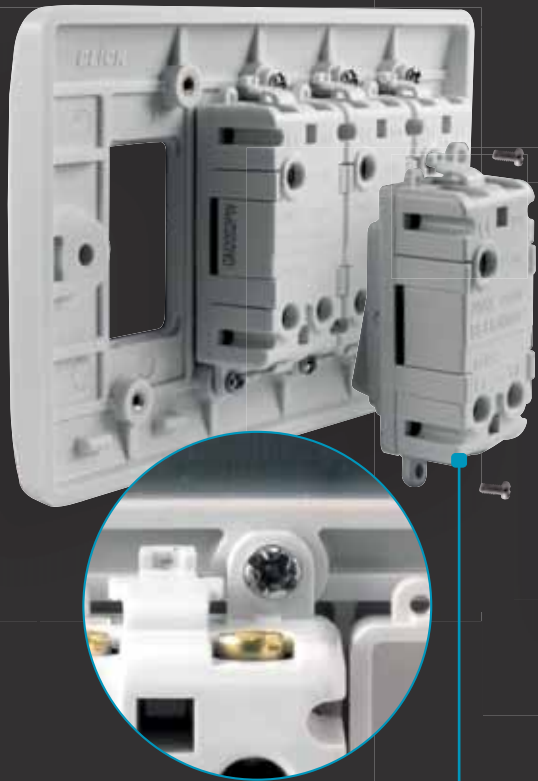

2. Screw each module into the GridPro® frontplate with the screws provided and systematically terminate cables into each module.



3. Attach the GridPro® frontplate using the fixing screws provided.





# Module Finishes

All GridPro® modules featured in this brochure are available in eleven distinctive, quality finishes, with black or white inserts. Antique brass and black nickel finishes are available with black inserts only. Brushed stainless, satin chrome and stainless steel finishes are available with grey inserts.

The GridPro® module rockers are styled to match the existing range of Click® wiring accessories to complement any existing Click® installation.

A simple code structure signifies the module colour and product finish...

<b>GM</b>	<b>2001</b>	<b>BK</b>	<b>CH</b>
GridPro® Module	Product	Module Colour	Product Finish



Satin Brass\*  
(SB)



Polished Brass  
(BR)



Polished Chrome  
(CH)



Brushed Stainless\*  
(BS)



Satin Chrome\*  
(SC)



Stainless Steel  
(SS)



Pearl Nickel  
(PN)



Black Nickel  
(BN)



Antique Brass\*  
(AB)



Grey  
(GY)




White  
(PW)


\*UK Design Registration 3015621.



DIMENSIONS (mm)

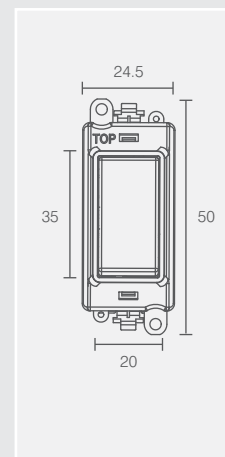

TYPICAL 1 WAY SWITCHED CIRCUIT

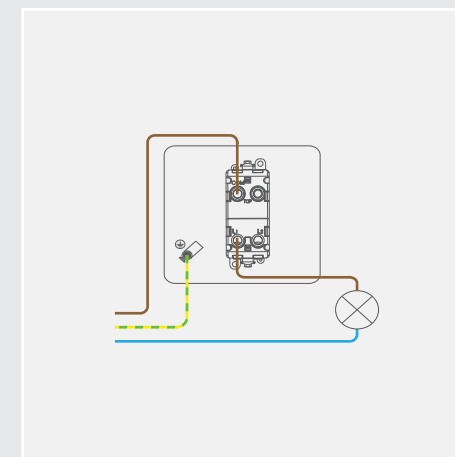

**20AX 1 Way Switch Modules**

<b>GM2001PW</b>	20AX 1 Way Switch Module - White
<b>GM2001BK</b>	20AX 1 Way Switch Module - Black
<b>GM2001PWBR</b>	20AX 1 Way Switch Module - White - Polished Brass
<b>GM2001PWBS</b>	20AX 1 Way Switch Module - White - Brushed Stainless
<b>GM2001PWCH</b>	20AX 1 Way Switch Module - White - Polished Chrome
<b>GM2001PWP</b>	20AX 1 Way Switch Module - White - Pearl Nickel
<b>GM2001PWSB</b>	20AX 1 Way Switch Module - White - Satin Brass
<b>GM2001PWSC</b>	20AX 1 Way Switch Module - White - Satin Chrome
<b>GM2001PWSS</b>	20AX 1 Way Switch Module - White - Stainless Steel
<b>GM2001BKAB</b>	20AX 1 Way Switch Module - Black - Antique Brass
<b>GM2001BKBN</b>	20AX 1 Way Switch Module - Black - Black Nickel
<b>GM2001BKBR</b>	20AX 1 Way Switch Module - Black - Polished Brass
<b>GM2001BKBS</b>	20AX 1 Way Switch Module - Black - Brushed Stainless
<b>GM2001BKCH</b>	20AX 1 Way Switch Module - Black - Polished Chrome
<b>GM2001BKPN</b>	20AX 1 Way Switch Module - Black - Pearl Nickel
<b>GM2001BKSB</b>	20AX 1 Way Switch Module - Black - Satin Brass
<b>GM2001BKSC</b>	20AX 1 Way Switch Module - Black - Satin Chrome
<b>GM2001BKSS</b>	20AX 1 Way Switch Module - Black - Stainless Steel
<b>GM2001GYBS</b>	20AX 1 Way Switch Module - Grey - Brushed Stainless
<b>GM2001GYSC</b>	20AX 1 Way Switch Module - Grey - Satin Chrome
<b>GM2001GYSS</b>	20AX 1 Way Switch Module - Grey - Stainless Steel

Standards: BS EN 60669-1  
 Back Box Depth: Dependent On Plate Used. Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
 Dimensions: 24.5mm (W) x 50mm (H) x 22.5mm (D)

**Material Composition**

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)  
 Cover, Insert & Rear Housing: Nylon  
 Terminals: Brass  
 Terminal Screws: Steel & Yellow Passivated  
 Silver "on-lay" Copper / Brass Contacts

**Voltage**

250V – 50Hz

**Current Rating**

20AX (suitable for inductive loads)

**Terminal Size**

ø 5mm

**Torque Value**

1.2Nm

**Cable Size**

2 x 4mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup> or 1 x 6mm<sup>2</sup>

**Back Box Depth**

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)

**Modular**

Yes

**Warranty**

10 Years

**Antimicrobial Certified**

Yes (Non Ingot Switches Only)

**IP Rating**

IP20

**Operational Temperature**

-5°C to +40°C

**Standards**

BS EN 60669-1

**Additional Information:**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.



**20AX 2 Way Switch Modules**


<b>GM2002PW</b>	20AX 2 Way Switch Module - White
<b>GM2002BK</b>	20AX 2 Way Switch Module - Black
<b>GM2002PWBR</b>	20AX 2 Way Switch Module - White - Polished Brass
<b>GM2002PWBS</b>	20AX 2 Way Switch Module - White - Brushed Stainless
<b>GM2002PWCH</b>	20AX 2 Way Switch Module - White - Polished Chrome
<b>GM2002PWP</b>	20AX 2 Way Switch Module - White - Pearl Nickel
<b>GM2002PWSB</b>	20AX 2 Way Switch Module - White - Satin Brass
<b>GM2002PWSC</b>	20AX 2 Way Switch Module - White - Satin Chrome
<b>GM2002PWSS</b>	20AX 2 Way Switch Module - White - Stainless Steel
<b>GM2002BKAB</b>	20AX 2 Way Switch Module - Black - Antique Brass
<b>GM2002BKBN</b>	20AX 2 Way Switch Module - Black - Black Nickel
<b>GM2002BKBR</b>	20AX 2 Way Switch Module - Black - Polished Brass
<b>GM2002BKBS</b>	20AX 2 Way Switch Module - Black - Brushed Stainless
<b>GM2002BKCH</b>	20AX 2 Way Switch Module - Black - Polished Chrome
<b>GM2002BKPN</b>	20AX 2 Way Switch Module - Black - Pearl Nickel
<b>GM2002BKSB</b>	20AX 2 Way Switch Module - Black - Satin Brass
<b>GM2002BKSC</b>	20AX 2 Way Switch Module - Black - Satin Chrome
<b>GM2002BKSS</b>	20AX 2 Way Switch Module - Black - Stainless Steel
<b>GM2002GYBS</b>	20AX 2 Way Switch Module - Grey - Brushed Stainless
<b>GM2002GYSC</b>	20AX 2 Way Switch Module - Grey - Satin Chrome
<b>GM2002GYSS</b>	20AX 2 Way Switch Module - Grey - Stainless Steel

Standards: BS EN 60669-1  
 Back Box Depth: Dependent On Plate Used Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
 Dimensions: 24.5mm (W) x 50mm (H) x 22.5mm (D)

DIMENSIONS (mm)



TYPICAL 2 WAY SWITCHED CIRCUIT

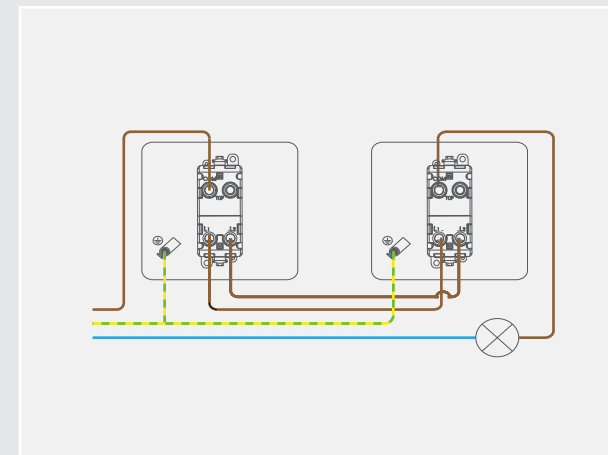

**Material Composition**

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)  
 Cover, Insert & Rear Housing: Nylon  
 Terminals: Brass  
 Terminal Screws: Steel & Yellow Passivated  
 Silver "on-lay" Copper / Brass Contacts

**Voltage**

250V – 50Hz

**Current Rating**

20AX (suitable for inductive loads)

**Terminal Size**

ø 5mm

**Torque Value**

1.2Nm

**Cable Size**

2 x 4mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup> or 1 x 6mm<sup>2</sup>

**Back Box Depth**

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)

**Modular**

Yes

**Warranty**

10 Years

**Antimicrobial Certified**

Yes (Non Ingot Switches Only)

**IP Rating**

IP20

**Operational Temperature**

-5°C to +40°C

**Standards**

BS EN 60669-1

**Additional Information:**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.




Retractive switches are not suitable for use with fluorescent loads.

**20AX 2 Way Retractive Switch Modules**


<a href="#">GM2004PW</a>	20AX 2 Way Retractive Switch Module - White
<a href="#">GM2004BK</a>	20AX 2 Way Retractive Switch Module - Black
<a href="#">GM2004PWBR</a>	20AX 2 Way Retractive Switch Module - White - Polished Brass
<a href="#">GM2004PWBS</a>	20AX 2 Way Retractive Switch Module - White - Brushed Stainless
<a href="#">GM2004PWCH</a>	20AX 2 Way Retractive Switch Module - White - Polished Chrome
<a href="#">GM2004PWPN</a>	20AX 2 Way Retractive Switch Module - White - Pearl Nickel
<a href="#">GM2004PWSB</a>	20AX 2 Way Retractive Switch Module - White - Satin Brass
<a href="#">GM2004PWSC</a>	20AX 2 Way Retractive Switch Module - White - Satin Chrome
<a href="#">GM2004PWSS</a>	20AX 2 Way Retractive Switch Module - White - Stainless Steel
<a href="#">GM2004BKAB</a>	20AX 2 Way Retractive Switch Module - Black - Antique Brass
<a href="#">GM2004BKBN</a>	20AX 2 Way Retractive Switch Module - Black - Black Nickel
<a href="#">GM2004BKBR</a>	20AX 2 Way Retractive Switch Module - Black - Polished Brass
<a href="#">GM2004BKBS</a>	20AX 2 Way Retractive Switch Module - Black - Brushed Stainless
<a href="#">GM2004BKCH</a>	20AX 2 Way Retractive Switch Module - Black - Polished Chrome
<a href="#">GM2004BKPN</a>	20AX 2 Way Retractive Switch Module - Black - Pearl Nickel
<a href="#">GM2004BKSB</a>	20AX 2 Way Retractive Switch Module - Black - Satin Brass
<a href="#">GM2004BKSC</a>	20AX 2 Way Retractive Switch Module - Black - Satin Chrome
<a href="#">GM2004BKSS</a>	20AX 2 Way Retractive Switch Module - Black - Stainless Steel
<a href="#">GM2004GYBS</a>	20AX 2 Way Retractive Switch Module - Grey - Brushed Stainless
<a href="#">GM2004GYSC</a>	20AX 2 Way Retractive Switch Module - Grey - Satin Chrome
<a href="#">GM2004GYSS</a>	20AX 2 Way Retractive Switch Module - Grey - Stainless Steel

Standards: BS EN 60669-1  
 Back Box Depth: Dependent On Plate Used. Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
 Dimensions: 24.5mm (W) x 50mm (H) x 22.5mm (D)

DIMENSIONS (mm)

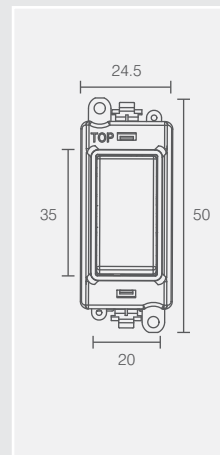

TYPICAL 2 WAY RETRACTIVE SWITCH CIRCUIT

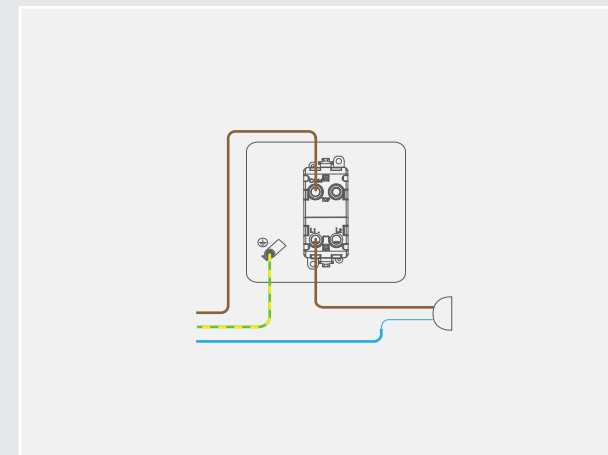

**Material Composition**

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)  
 Cover, Insert & Rear Housing: Nylon  
 Terminals: Brass  
 Terminal Screws: Steel & Yellow Passivated  
 Silver "on-lay" Copper / Brass Contacts

**Voltage**

250V – 50Hz

**Current Rating**

20AX

**Terminal Size**

ø 5mm

**Torque Value**

1.2Nm

**Cable Size**

2 x 4mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup> or 1 x 6mm<sup>2</sup>

**Back Box Depth**

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)

**Modular**

Yes

**Warranty**

10 Years

**Antimicrobial Certified**

Yes (Non Ingot Switches Only)

**IP Rating**

IP20

**Operational Temperature**

-5°C to +40°C

**Standards**

BS EN 60669-1

**Additional Information:**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.





**20AX Intermediate Switch Modules**


<b>GM2028PW</b>	20AX Intermediate Switch Module - White
<b>GM2028BK</b>	20AX Intermediate Switch Module - Black
<b>GM2028PWBR</b>	20AX Intermediate Switch Module - White - Polished Brass
<b>GM2028PWBS</b>	20AX Intermediate Switch Module - White - Brushed Stainless
<b>GM2028PWCH</b>	20AX Intermediate Switch Module - White - Polished Chrome
<b>GM2028PWPN</b>	20AX Intermediate Switch Module - White - Pearl Nickel
<b>GM2028PWBSB</b>	20AX Intermediate Switch Module - White - Satin Brass
<b>GM2028PWSC</b>	20AX Intermediate Switch Module - White - Satin Chrome
<b>GM2028PWSS</b>	20AX Intermediate Switch Module - White - Stainless Steel
<b>GM2028BKAB</b>	20AX Intermediate Switch Module - Black - Antique Brass
<b>GM2028BKBN</b>	20AX Intermediate Switch Module - Black - Black Nickel
<b>GM2028BKBR</b>	20AX Intermediate Switch Module - Black - Polished Brass
<b>GM2028BKBS</b>	20AX Intermediate Switch Module - Black - Brushed Stainless
<b>GM2028BKCH</b>	20AX Intermediate Switch Module - Black - Polished Chrome
<b>GM2028BKPN</b>	20AX Intermediate Switch Module - Black - Pearl Nickel
<b>GM2028BKSB</b>	20AX Intermediate Switch Module - Black - Satin Brass
<b>GM2028BKSC</b>	20AX Intermediate Switch Module - Black - Satin Chrome
<b>GM2028BKSS</b>	20AX Intermediate Switch Module - Black - Stainless Steel
<b>GM2028GYBS</b>	20AX Intermediate Switch Module - Grey - Brushed Stainless
<b>GM2028GYSC</b>	20AX Intermediate Switch Module - Grey - Satin Chrome
<b>GM2028GYSS</b>	20AX Intermediate Switch Module - Grey - Stainless Steel

Standards: BS EN 60669-1  
 Back Box Depth: Dependent On Plate Used Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
 Dimensions: 24.5mm (W) x 50mm (H) x 22.5mm (D)

DIMENSIONS (mm)



TYPICAL INTERMEDIATE SWITCHED CIRCUIT

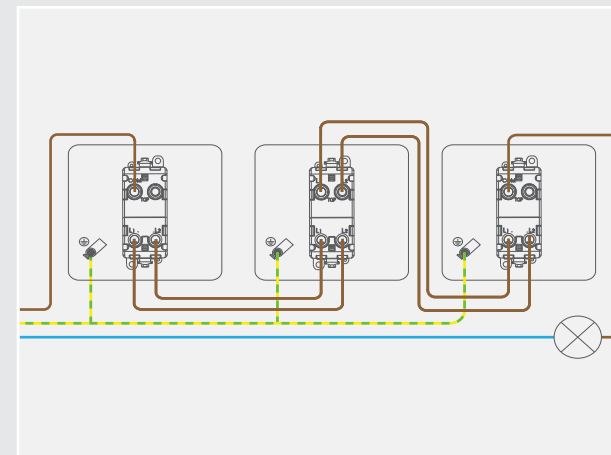

**Material Composition**


Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)  
 Cover, Insert & Rear Housing: Nylon  
 Terminals: Brass  
 Terminal Screws: Steel & Yellow Passivated  
 Silver "on-lay" Copper / Brass Contacts

<b>Voltage</b>	250V – 50Hz
<b>Current Rating</b>	20AX (suitable for inductive loads)
<b>Terminal Size</b>	ø 5mm
<b>Torque Value</b>	1.2Nm
<b>Cable Size</b>	2 x 4mm <sup>2</sup> , 3 x 2.5mm <sup>2</sup> or 1 x 6mm <sup>2</sup>
<b>Back Box Depth</b>	25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)
<b>Modular</b>	Yes
<b>Warranty</b>	10 Years
<b>Antimicrobial Certified</b>	Yes (Non Ingot Switches Only)
<b>IP Rating</b>	IP20
<b>Operational Temperature</b>	-5°C to +40°C
<b>Standards</b>	BS EN 60669-1


**Additional Information:**  
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



DIMENSIONS (mm)

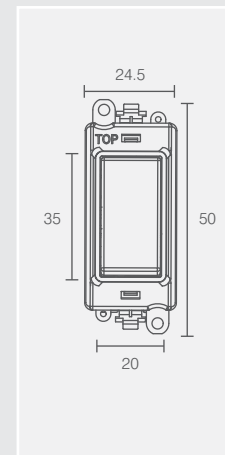

TYPICAL WIRING DIAGRAM

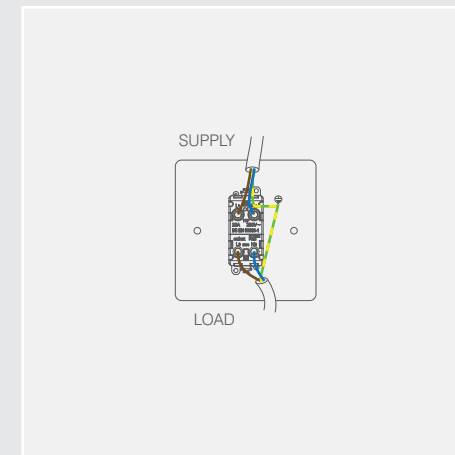

**20AX Double Pole Switch Modules**

<b>GM2018PW</b>	20AX Double Pole Switch Module - White
<b>GM2018BK</b>	20AX Double Pole Switch Module - Black
<b>GM2018PWBR</b>	20AX Double Pole Switch Module - White - Polished Brass
<b>GM2018PWBS</b>	20AX Double Pole Switch Module - White - Brushed Stainless
<b>GM2018PWCH</b>	20AX Double Pole Switch Module - White - Polished Chrome
<b>GM2018PWPN</b>	20AX Double Pole Switch Module - White - Pearl Nickel
<b>GM2018PWSB</b>	20AX Double Pole Switch Module - White - Satin Brass
<b>GM2018PWSC</b>	20AX Double Pole Switch Module - White - Satin Chrome
<b>GM2018PWSS</b>	20AX Double Pole Switch Module - White - Stainless Steel
<b>GM2018BKAB</b>	20AX Double Pole Switch Module - Black - Antique Brass
<b>GM2018BKBN</b>	20AX Double Pole Switch Module - Black - Black Nickel
<b>GM2018BKBR</b>	20AX Double Pole Switch Module - Black - Polished Brass
<b>GM2018BKBS</b>	20AX Double Pole Switch Module - Black - Brushed Stainless
<b>GM2018BKCH</b>	20AX Double Pole Switch Module - Black - Polished Chrome
<b>GM2018BKPN</b>	20AX Double Pole Switch Module - Black - Pearl Nickel
<b>GM2018BKSB</b>	20AX Double Pole Switch Module - Black - Satin Brass
<b>GM2018BKSC</b>	20AX Double Pole Switch Module - Black - Satin Chrome
<b>GM2018BKSS</b>	20AX Double Pole Switch Module - Black - Stainless Steel
<b>GM2018GYBS</b>	20AX Double Pole Switch Module - Grey - Brushed Stainless
<b>GM2018GYSC</b>	20AX Double Pole Switch Module - Grey - Satin Chrome
<b>GM2018GYSS</b>	20AX Double Pole Switch Module - Grey - Stainless Steel

Standards: BS EN 60669-1  
 Back Box Depth: Dependent On Plate Used Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
 Dimensions: 24.5mm (W) x 50mm (H) x 22.5mm (D)

**Material Composition**

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)  
 Cover, Insert & Rear Housing: Nylon  
 Terminals: Brass, Terminal Screws: Steel & Yellow Passivated  
 Silver "on-lay" Copper / Brass Contacts

**Voltage**

250V ~ 50Hz

**Current Rating**

20AX

**Terminal Size**

ø 5mm

**Torque Value**

1.2Nm

**Cable Size**

2 x 4mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup> or 1 x 6mm<sup>2</sup>

**Back Box Depth**

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity™)

**Double Pole**

Yes

**Modular**

Yes

**Warranty**

10 Years

**Antimicrobial Certified**

Yes (Non Ingot Switches Only)

**IP Rating**

IP20

**Operational Temperature**

-5°C to +40°C

**Standards**

BS EN 60669-1

**Additional Information:**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.



GM2018PW-CH

GM2018PWS-TD



GM2018BK-BL

MODULE BACK

The GM2018 modules listed are available with the following laser etched legends:

- WM Washing Machine
- FD Fridge
- TD Tumble Dryer
- FZ Freezer
- FF Fridge Freezer
- FN Fan
- DW Dishwasher
- HB Hob
- MW Microwave
- BL Boiler
- WD Waste Disposal
- OV Oven
- CH Cooker Hood
- WH Water Heater
- HT Hot Tap
- WC Wine Cooler
- WDR Warming Drawer

Suffix the two letters to complete the product code with legend eg. GM2018PWCH-WM

**IN HOUSE LASER ETCHING**


Our in house laser printer provides flexibility to suit large volume batch or custom jobs. The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.

**20AX Double Pole Switch Modules - Printed Legend**


<b>GM2018PW</b>	20AX Double Pole Switch Module - White
<b>GM2018BK</b>	20AX Double Pole Switch Module - Black
<b>GM2018PWBR</b>	20AX Double Pole Switch Module - White - Polished Brass
<b>GM2018PWBS</b>	20AX Double Pole Switch Module - White - Brushed Stainless
<b>GM2018PWCH</b>	20AX Double Pole Switch Module - White - Polished Chrome
<b>GM2018PWPN</b>	20AX Double Pole Switch Module - White - Pearl Nickel
<b>GM2018PWSB</b>	20AX Double Pole Switch Module - White - Satin Brass
<b>GM2018PWSC</b>	20AX Double Pole Switch Module - White - Satin Chrome
<b>GM2018PWSS</b>	20AX Double Pole Switch Module - White - Stainless Steel
<b>GM2018BKAB</b>	20AX Double Pole Switch Module - Black - Antique Brass
<b>GM2018BKBN</b>	20AX Double Pole Switch Module - Black - Black Nickel
<b>GM2018BKBR</b>	20AX Double Pole Switch Module - Black - Polished Brass
<b>GM2018BKBS</b>	20AX Double Pole Switch Module - Black - Brushed Stainless
<b>GM2018BKCH</b>	20AX Double Pole Switch Module - Black - Polished Chrome
<b>GM2018BKPN</b>	20AX Double Pole Switch Module - Black - Pearl Nickel
<b>GM2018BKSB</b>	20AX Double Pole Switch Module - Black - Satin Brass
<b>GM2018BKSC</b>	20AX Double Pole Switch Module - Black - Satin Chrome
<b>GM2018BKSS</b>	20AX Double Pole Switch Module - Black - Stainless Steel

Standards: BS EN 60669-1  
 Back Box Depth: Dependent On Plate Used Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
 Dimensions: 24.5mm (W) x 50mm (H) x 22.5mm (D)

DIMENSIONS (mm)

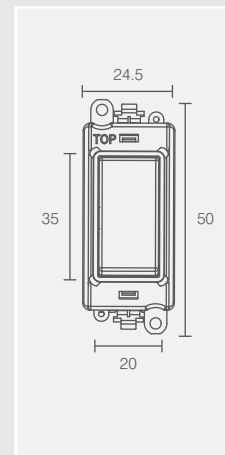

TYPICAL WIRING DIAGRAM

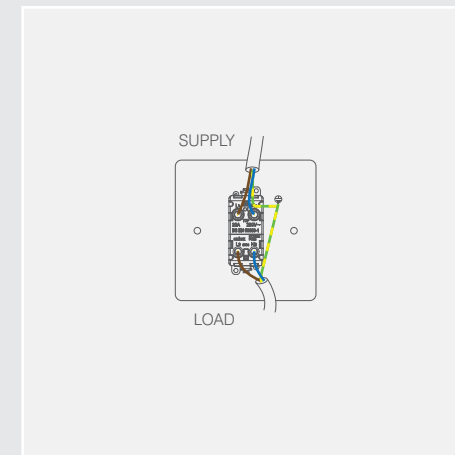

**Material Composition**

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)  
 Cover, Insert & Rear Housing: Nylon  
 Terminals: Brass, Terminal Screws: Steel & Yellow Passivated  
 Silver "on-lay" Copper / Brass Contacts

**Voltage**

250V ~ 50Hz

**Current Rating**

20AX

**Terminal Size**

ø 5mm

**Torque Value**

1.2Nm

**Cable Size**

2 x 4mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup> or 1 x 6mm<sup>2</sup>

**Back Box Depth**

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)

**Double Pole**

Yes

**Modular**

Yes

**Warranty**

10 Years

**Antimicrobial Certified**

Yes (Non Ingot Switches Only)

**IP Rating**

IP20

**Operational Temperature**

-5°C to +40°C

**Standards**


BS EN 60669-1

**Additional Information:**


Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.



DIMENSIONS (mm)

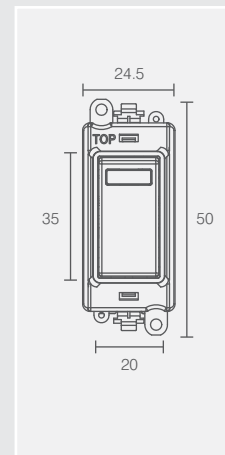

TYPICAL WIRING DIAGRAM

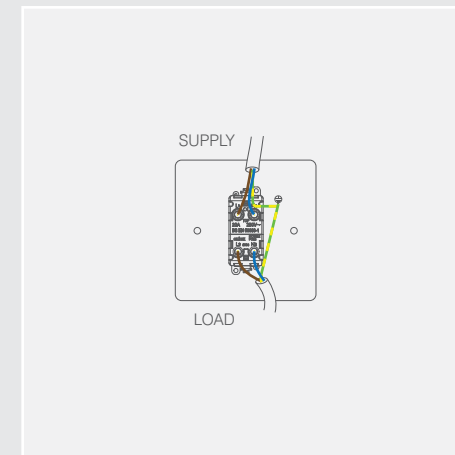

**20AX Double Pole Switch Modules with Neon**

<b>GM2018NPW</b>	20AX Double Pole Switch With Neon Module - White
<b>GM2018NBK</b>	20AX Double Pole Switch With Neon Module - Black
<b>GM2018NPWBR</b>	20AX Double Pole Switch With Neon Module - White - Polished Brass
<b>GM2018NPWBS</b>	20AX Double Pole Switch With Neon Module - White - Brushed Stainless
<b>GM2018NPWCH</b>	20AX Double Pole Switch With Neon Module - White - Polished Chrome
<b>GM2018NPWPN</b>	20AX Double Pole Switch With Neon Module - White - Pearl Nickel
<b>GM2018NPWSB</b>	20AX Double Pole Switch With Neon Module - White - Satin Brass
<b>GM2018NPWSC</b>	20AX Double Pole Switch With Neon Module - White - Satin Chrome
<b>GM2018NPWSS</b>	20AX Double Pole Switch With Neon Module - White - Stainless Steel
<b>GM2018NBKAB</b>	20AX Double Pole Switch With Neon Module - Black - Antique Brass
<b>GM2018NBKBN</b>	20AX Double Pole Switch With Neon Module - Black - Black Nickel
<b>GM2018NBKBR</b>	20AX Double Pole Switch With Neon Module - Black - Polished Brass
<b>GM2018NBKBS</b>	20AX Double Pole Switch With Neon Module - Black - Brushed Stainless
<b>GM2018NBKCH</b>	20AX Double Pole Switch With Neon Module - Black - Polished Chrome
<b>GM2018NBKPN</b>	20AX Double Pole Switch With Neon Module - Black - Pearl Nickel
<b>GM2018NBKSB</b>	20AX Double Pole Switch With Neon Module - Black - Satin Brass
<b>GM2018NBKSC</b>	20AX Double Pole Switch With Neon Module - Black - Satin Chrome
<b>GM2018NBKSS</b>	20AX Double Pole Switch With Neon Module - Black - Stainless Steel

Standards: BS EN 60669-1  
 Back Box Depth: Dependent On Plate Used Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
 Dimensions: 24.5mm (W) x 50mm (H) x 22.5mm (D)

**Material Composition**

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)  
 Cover, Insert & Rear Housing: Nylon  
 Terminals: Brass, Terminal Screws: Steel & Yellow Passivated  
 Silver "on-lay" Copper / Brass Contacts

<b>Voltage</b>	250V ~ 50Hz
<b>Current Rating</b>	20AX
<b>Terminal Size</b>	ø 5mm
<b>Torque Value</b>	1.2Nm
<b>Cable Size</b>	2 x 4mm <sup>2</sup> , 3 x 2.5mm <sup>2</sup> or 1 x 6mm <sup>2</sup>
<b>Back Box Depth</b>	25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity™)
<b>Double Pole</b>	Yes
<b>Modular</b>	Yes
<b>Warranty</b>	10 Years
<b>Antimicrobial Certified</b>	Yes (Non Ingot Switches Only)
<b>IP Rating</b>	IP20
<b>Operational Temperature</b>	-5°C to +40°C
<b>Standards</b>	BS EN 60669-1

**Additional Information:**  
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.





GM2018NPWSC-DW

GM2018NPWSB-WM



GM2018NBKAB-OV

MODULE BACK

The GM2018N modules listed are available with the following laser etched legends:

- WM Washing Machine
- FD Fridge
- TD Tumble Dryer
- FZ Freezer
- FF Fridge Freezer
- FN Fan
- DW Dishwasher
- HB Hob
- MW Microwave
- BL Boiler
- WD Waste Disposal
- OV Oven
- CH Cooker Hood
- WH Water Heater
- HT Hot Tap
- WC Wine Cooler
- WDR Warming Drawer

Suffix the two letters to complete the product code with legend eg. GM2018NPWCH-WM

**IN HOUSE LASER ETCHING**


Our in house laser printer provides flexibility to suit large volume batch or custom jobs. The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.

**20AX Double Pole Switch Modules with Neon - Printed Legend**


<b>GM2018NPW</b>	20AX Double Pole Switch With Neon Module - White
<b>GM2018NBK</b>	20AX Double Pole Switch With Neon Module - Black
<b>GM2018NPWBR</b>	20AX Double Pole Switch With Neon Module - White - Polished Brass
<b>GM2018NPWBS</b>	20AX Double Pole Switch With Neon Module - White - Brushed Stainless
<b>GM2018NPWCH</b>	20AX Double Pole Switch With Neon Module - White - Polished Chrome
<b>GM2018NPWPN</b>	20AX Double Pole Switch With Neon Module - White - Pearl Nickel
<b>GM2018NPWSB</b>	20AX Double Pole Switch With Neon Module - White - Satin Brass
<b>GM2018NPWSC</b>	20AX Double Pole Switch With Neon Module - White - Satin Chrome
<b>GM2018NPWSS</b>	20AX Double Pole Switch With Neon Module - White - Stainless Steel
<b>GM2018NBKAB</b>	20AX Double Pole Switch With Neon Module - Black - Antique Brass
<b>GM2018NBKBN</b>	20AX Double Pole Switch With Neon Module - Black - Black Nickel
<b>GM2018NBKBR</b>	20AX Double Pole Switch With Neon Module - Black - Polished Brass
<b>GM2018NBKBS</b>	20AX Double Pole Switch With Neon Module - Black - Brushed Stainless
<b>GM2018NBKCH</b>	20AX Double Pole Switch With Neon Module - Black - Polished Chrome
<b>GM2018NBKPN</b>	20AX Double Pole Switch With Neon Module - Black - Pearl Nickel
<b>GM2018NBKSB</b>	20AX Double Pole Switch With Neon Module - Black - Satin Brass
<b>GM2018NBKSC</b>	20AX Double Pole Switch With Neon Module - Black - Satin Chrome
<b>GM2018NBKSS</b>	20AX Double Pole Switch With Neon Module - Black - Stainless Steel

Standards: BS EN 60669-1  
 Back Box Depth: Dependent On Plate Used Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
 Dimensions: 24.5mm (W) x 50mm (H) x 22.5mm (D)

**DIMENSIONS (mm)**

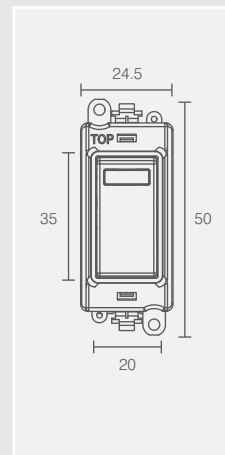

**TYPICAL WIRING DIAGRAM**

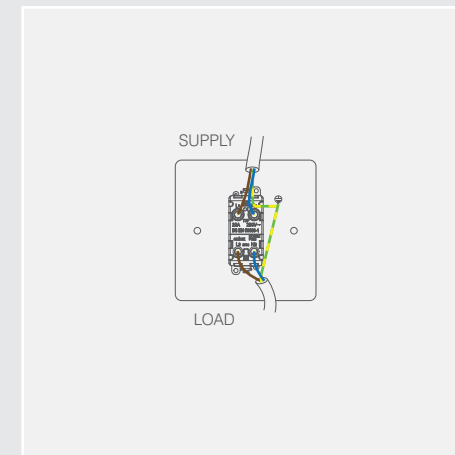

**Material Composition**

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)  
 Cover, Insert & Rear Housing: Nylon  
 Terminals: Brass, Terminal Screws: Steel & Yellow Passivated  
 Silver "on-lay" Copper / Brass Contacts

**Voltage**

250V ~ 50Hz

**Current Rating**

20AX

**Terminal Size**

ø 5mm

**Torque Value**

1.2Nm

**Cable Size**

2 x 4mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup> or 1 x 6mm<sup>2</sup>

**Back Box Depth**

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)

**Double Pole**

Yes

**Modular**

Yes

**Warranty**

10 Years

**Antimicrobial Certified**

Yes (Non Ingot Switches Only)

**IP Rating**

IP20

**Operational Temperature**

-5°C to +40°C

**Standards**

BS EN 60669-1

**Additional Information:**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.




**20AX 3 Position Switch Modules**


<b>GM2070PW</b>	20AX 3 Position Switch Module - White
<b>GM2070BK</b>	20AX 3 Position Switch Module - Black
<b>GM2070PWBR</b>	20AX 3 Position Switch Module - White - Polished Brass
<b>GM2070PWBS</b>	20AX 3 Position Switch Module - White - Brushed Stainless
<b>GM2070PWCH</b>	20AX 3 Position Switch Module - White - Polished Chrome
<b>GM2070PWPN</b>	20AX 3 Position Switch Module - White - Pearl Nickel
<b>GM2070PWSB</b>	20AX 3 Position Switch Module - White - Satin Brass
<b>GM2070PWSC</b>	20AX 3 Position Switch Module - White - Satin Chrome
<b>GM2070PWSS</b>	20AX 3 Position Switch Module - White - Stainless Steel
<b>GM2070BKAB</b>	20AX 3 Position Switch Module - Black - Antique Brass
<b>GM2070BKBN</b>	20AX 3 Position Switch Module - Black - Black Nickel
<b>GM2070BKBR</b>	20AX 3 Position Switch Module - Black - Polished Brass
<b>GM2070BKBS</b>	20AX 3 Position Switch Module - Black - Brushed Stainless
<b>GM2070BKCH</b>	20AX 3 Position Switch Module - Black - Polished Chrome
<b>GM2070BKPN</b>	20AX 3 Position Switch Module - Black - Pearl Nickel
<b>GM2070BKSB</b>	20AX 3 Position Switch Module - Black - Satin Brass
<b>GM2070BKSC</b>	20AX 3 Position Switch Module - Black - Satin Chrome
<b>GM2070BKSS</b>	20AX 3 Position Switch Module - Black - Stainless Steel
<b>GM2070GYBS</b>	20AX 3 Position Switch Module - Grey - Brushed Stainless
<b>GM2070GYSC</b>	20AX 3 Position Switch Module - Grey - Satin Chrome
<b>GM2070GYSS</b>	20AX 3 Position Switch Module - Grey - Stainless Steel

Standards: BS EN 60669-1  
 Back Box Depth: Dependent On Plate Used Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
 Dimensions: 24.5mm (W) x 50mm (H) x 26mm (D)

DIMENSIONS (mm)

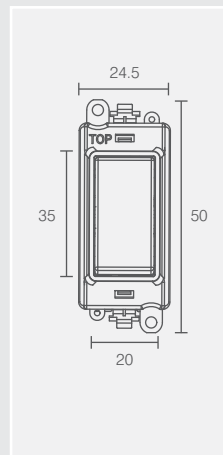

TYPICAL 3 POSITION SWITCHED CIRCUIT

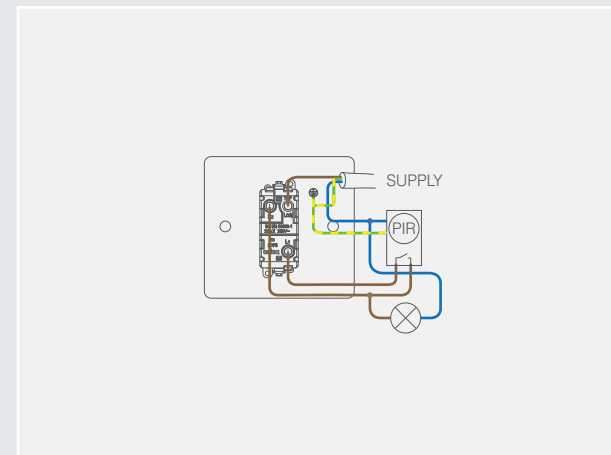

**Material Composition**

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)  
 Cover, Insert & Rear Housing: Nylon  
 Terminals: Brass  
 Terminal Screws: Steel & Yellow Passivated  
 Silver "on-lay" Copper / Brass Contacts

**Voltage**

250V – 50Hz

**Current Rating**

20AX (suitable for inductive loads)

**Terminal Size**

ø 5mm

**Torque Value**

1.2Nm

**Cable Size**

2 x 4mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup> or 1 x 6mm<sup>2</sup>

**Back Box Depth**

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)

**Modular**

Yes

**Warranty**

10 Years

**Antimicrobial Certified**

Yes (Non Ingot Switches Only)

**IP Rating**

IP20

**Operational Temperature**

-5°C to +40°C

**Standards**

BS EN 60669-1

**Additional Information:**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.




Retractive switches are not suitable for use with fluorescent loads.

**20AX 3 Position Retractive Switch Modules**


<b>GM2075PW</b>	20AX 3 Position Retractive Switch Module - White
<b>GM2075BK</b>	20AX 3 Position Retractive Switch Module - Black
<b>GM2075PWBR</b>	20AX 3 Position Retractive Switch Module - White - Polished Brass
<b>GM2075PWBS</b>	20AX 3 Position Retractive Switch Module - White - Brushed Stainless
<b>GM2075PWCH</b>	20AX 3 Position Retractive Switch Module - White - Polished Chrome
<b>GM2075PWPN</b>	20AX 3 Position Retractive Switch Module - White - Pearl Nickel
<b>GM2075PWSB</b>	20AX 3 Position Retractive Switch Module - White - Satin Brass
<b>GM2075PWSC</b>	20AX 3 Position Retractive Switch Module - White - Satin Chrome
<b>GM2075PWSS</b>	20AX 3 Position Retractive Switch Module - White - Stainless Steel
<b>GM2075BKAB</b>	20AX 3 Position Retractive Switch Module - Black - Antique Brass
<b>GM2075BKBN</b>	20AX 3 Position Retractive Switch Module - Black - Black Nickel
<b>GM2075BKBR</b>	20AX 3 Position Retractive Switch Module - Black - Polished Brass
<b>GM2075BKBS</b>	20AX 3 Position Retractive Switch Module - Black - Brushed Stainless
<b>GM2075BKCH</b>	20AX 3 Position Retractive Switch Module - Black - Polished Chrome
<b>GM2075BKPN</b>	20AX 3 Position Retractive Switch Module - Black - Pearl Nickel
<b>GM2075BKSB</b>	20AX 3 Position Retractive Switch Module - Black - Satin Brass
<b>GM2075BKSC</b>	20AX 3 Position Retractive Switch Module - Black - Satin Chrome
<b>GM2075BKSS</b>	20AX 3 Position Retractive Switch Module - Black - Stainless Steel
<b>GM2075GYBS</b>	20AX 3 Position Retractive Switch Module - Grey - Brushed Stainless
<b>GM2075GYCS</b>	20AX 3 Position Retractive Switch Module - Grey - Satin Chrome
<b>GM2075GYSS</b>	20AX 3 Position Retractive Switch Module - Grey - Stainless Steel

Standards: BS EN 60669-1  
 Back Box Depth: Dependent On Plate Used Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
 Dimensions: 24.5mm (W) x 50mm (H) x 26mm (D)

DIMENSIONS (mm)

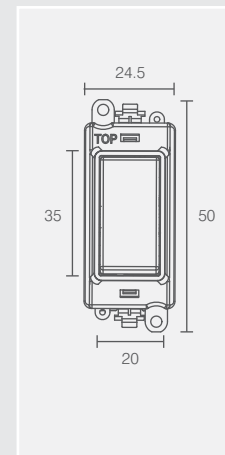

TYPICAL WIRING DIAGRAM

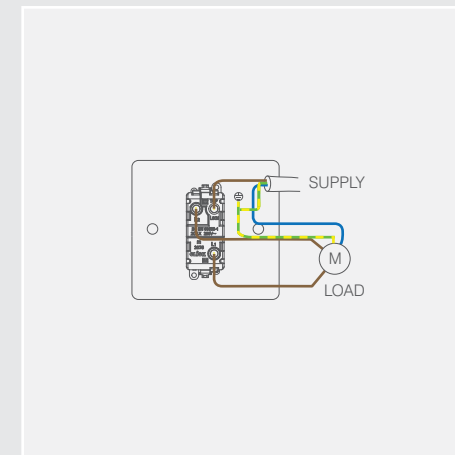

**Material Composition**

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)  
 Cover, Insert & Rear Housing: Nylon  
 Terminals: Brass  
 Terminal Screws: Steel & Yellow Passivated  
 Silver "on-lay" Copper / Brass Contacts

**Voltage**

250V – 50Hz

**Current Rating**

20AX

**Terminal Size**

ø 5mm

**Torque Value**

1.2Nm

**Cable Size**

2 x 4mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup> or 1 x 6mm<sup>2</sup>

**Back Box Depth**

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)

**Modular**

Yes

**Warranty**

10 Years

**Antimicrobial Certified**

Yes (Non Ingot Switches Only)

**IP Rating**

IP20

**Operational Temperature**

-5°C to +40°C

**Standards**

BS EN 60669-1

**Additional Information:**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



**20AX 2 Way Toggle Switch Modules**


- GM209002BK** 20AX 2 Way Toggle Switch Module - Black
- GM209002BKAB** 20AX 2 Way Toggle Switch Module - Black - Antique Brass
- GM209002BKBN** 20AX 2 Way Toggle Switch Module - Black - Black Nickel
- GM209002BKBR** 20AX 2 Way Toggle Switch Module - Black - Polished Brass
- GM209002BKBS** 20AX 2 Way Toggle Switch Module - Black - Brushed Stainless
- GM209002BKCH** 20AX 2 Way Toggle Switch Module - Black - Polished Chrome
- GM209002BKPN** 20AX 2 Way Toggle Switch Module - Black - Pearl Nickel
- GM209002BKSB** 20AX 2 Way Toggle Switch Module - Black - Satin Brass
- GM209002BKSC** 20AX 2 Way Toggle Switch Module - Black - Satin Chrome
- GM209002BKSS** 20AX 2 Way Toggle Switch Module - Black - Stainless Steel
- GM209002PWBR** 20AX 2 Way Toggle Switch Module - White - Polished Brass
- GM209002PWBS** 20AX 2 Way Toggle Switch Module - White - Brushed Stainless
- GM209002PWCH** 20AX 2 Way Toggle Switch Module - White - Polished Chrome
- GM209002PWPN** 20AX 2 Way Toggle Switch Module - White - Pearl Nickel
- GM209002PWSB** 20AX 2 Way Toggle Switch Module - White - Satin Brass
- GM209002PWSC** 20AX 2 Way Toggle Switch Module - White - Satin Chrome
- GM209002PWSS** 20AX 2 Way Toggle Switch Module - White - Stainless Steel
- GM209002GYBS** 20AX 2 Way Toggle Switch Module - Grey - Brushed Stainless
- GM209002GYSC** 20AX 2 Way Toggle Switch Module - Grey - Satin Chrome
- GM209002GYSS** 20AX 2 Way Toggle Switch Module - Grey - Stainless Steel

Standards: BS EN 60669-1  
 Back Box Depth: Dependent On Plate Used. Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
 Dimensions: 24.5mm (W) x 50mm (H) x 19.5mm (D)

DIMENSIONS (mm)



TYPICAL 2 WAY SWITCHED CIRCUIT

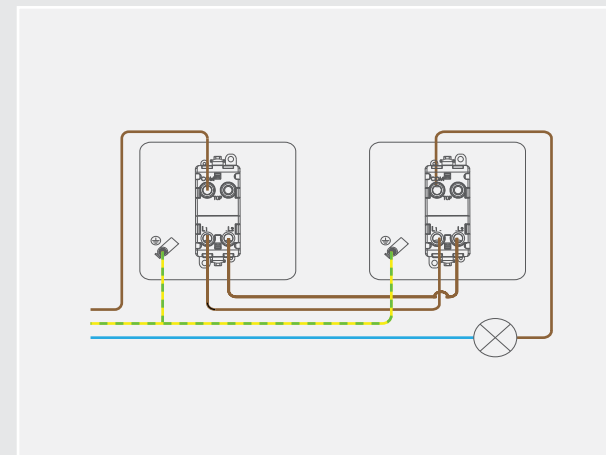

**Material Composition**

Rocker Switch: Plated Cast Copper  
 Cover, Insert & Rear Housing: Nylon  
 Terminals: Brass  
 Terminal Screws: Steel & Yellow Passivated  
 Silver "on-lay" Copper / Brass Contacts


<b>Voltage</b>	250V – 50Hz
<b>Current Rating</b>	20AX (suitable for inductive loads)
<b>Terminal Size</b>	ø 5mm
<b>Torque Value</b>	1.2Nm
<b>Cable Size</b>	2 x 4mm <sup>2</sup> , 3 x 2.5mm <sup>2</sup> or 1 x 6mm <sup>2</sup>
<b>Back Box Depth</b>	25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)
<b>Modular</b>	Yes
<b>Warranty</b>	10 Years
<b>Antimicrobial Certified</b>	No
<b>IP Rating</b>	IP20
<b>Operational Temperature</b>	-5°C to +40°C
<b>Standards</b>	BS EN 60669-1

**Additional Information:**  
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.






DIMENSIONS (mm)

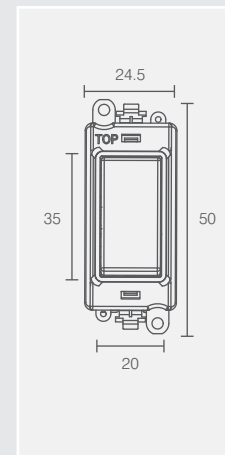

TYPICAL WIRING DIAGRAM

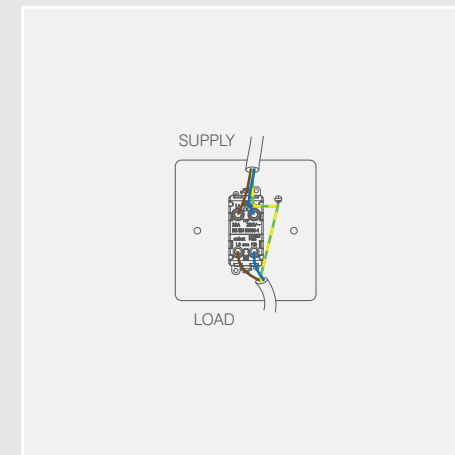

**20AX Double Pole Toggle Switch Modules**

- GM209018BK** 20AX Double Pole Toggle Switch Module - Black
- GM209018BKAB** 20AX Double Pole Toggle Switch Module - Black - Antique Brass
- GM209018BKBN** 20AX Double Pole Toggle Switch Module - Black - Black Nickel
- GM209018BKBR** 20AX Double Pole Toggle Switch Module - Black - Polished Brass
- GM209018BKBS** 20AX Double Pole Toggle Switch Module - Black - Brushed Stainless
- GM209018BKCH** 20AX Double Pole Toggle Switch Module - Black - Polished Chrome
- GM209018BKPN** 20AX Double Pole Toggle Switch Module - Black - Pearl Nickel
- GM209018KSB** 20AX Double Pole Toggle Switch Module - Black - Satin Brass
- GM209018KSC** 20AX Double Pole Toggle Switch Module - Black - Satin Chrome
- GM209018KSS** 20AX Double Pole Toggle Switch Module - Black - Stainless Steel
- GM209018PWBR** 20AX Double Pole Toggle Switch Module - White - Polished Brass
- GM209018PWBS** 20AX Double Pole Toggle Switch Module - White - Brushed Stainless
- GM209018PWCH** 20AX Double Pole Toggle Switch Module - White - Polished Chrome
- GM209018PWPN** 20AX Double Pole Toggle Switch Module - White - Pearl Nickel
- GM209018PWSSB** 20AX Double Pole Toggle Switch Module - White - Satin Brass
- GM209018PWSSC** 20AX Double Pole Toggle Switch Module - White - Satin Chrome
- GM209018PWSSS** 20AX Double Pole Toggle Switch Module - White - Stainless Steel
- GM209018GYBS** 20AX Double Pole Toggle Switch Module - Grey - Brushed Stainless
- GM209018GYSC** 20AX Double Pole Toggle Switch Module - Grey - Satin Chrome
- GM209018GYSS** 20AX Double Pole Toggle Switch Module - Grey - Stainless Steel

Standards: BS EN 60669-1  
 Back Box Depth: Dependent On Plate Used Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
 Dimensions: 24.5mm (W) x 50mm (H) x 19.5mm (D)

**Material Composition**

Rocker Switch: Plated Cast Copper  
 Cover, Insert & Rear Housing: Nylon  
 Terminals: Brass  
 Terminal Screws: Steel & Yellow Passivated  
 Silver "on-lay" Copper / Brass Contacts

<b>Voltage</b>	250V – 50Hz
<b>Current Rating</b>	20AX (suitable for inductive loads)
<b>Terminal Size</b>	ø 5mm
<b>Torque Value</b>	1.2Nm
<b>Cable Size</b>	2 x 4mm <sup>2</sup> , 3 x 2.5mm <sup>2</sup> or 1 x 6mm <sup>2</sup>
<b>Back Box Depth</b>	25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)
<b>Modular</b>	Yes
<b>Warranty</b>	10 Years
<b>Antimicrobial Certified</b>	No
<b>IP Rating</b>	IP20
<b>Operational Temperature</b>	-5°C to +40°C
<b>Standards</b>	BS EN 60669-1

**Additional Information:**  
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.




**20AX Intermediate Toggle Switch Modules**


- GM209028BK** 20AX Intermediate Toggle Switch Module - Black
- GM209028BKAB** 20AX Intermediate Toggle Switch Module - Black - Antique Brass
- GM209028BKBN** 20AX Intermediate Toggle Switch Module - Black - Black Nickel
- GM209028BKBR** 20AX Intermediate Toggle Switch Module - Black - Polished Brass
- GM209028BKBS** 20AX Intermediate Toggle Switch Module - Black - Brushed Stainless
- GM209028BKCH** 20AX Intermediate Toggle Switch Module - Black - Polished Chrome
- GM209028BKPN** 20AX Intermediate Toggle Switch Module - Black - Pearl Nickel
- GM209028KSB** 20AX Intermediate Toggle Switch Module - Black - Satin Brass
- GM209028BKSC** 20AX Intermediate Toggle Switch Module - Black - Satin Chrome
- GM209028BKSS** 20AX Intermediate Toggle Switch Module - Black - Stainless Steel
- GM209028PWBR** 20AX Intermediate Toggle Switch Module - White - Polished Brass
- GM209028PWBS** 20AX Intermediate Toggle Switch Module - White - Brushed Stainless
- GM209028PWCH** 20AX Intermediate Toggle Switch Module - White - Polished Chrome
- GM209028PWPN** 20AX Intermediate Toggle Switch Module - White - Pearl Nickel
- GM209028PWBSB** 20AX Intermediate Toggle Switch Module - White - Satin Brass
- GM209028PWSC** 20AX Intermediate Toggle Switch Module - White - Satin Chrome
- GM209028PWSS** 20AX Intermediate Toggle Switch Module - White - Stainless Steel
- GM209028GYBS** 20AX Intermediate Toggle Switch Module - Grey - Brushed Stainless
- GM209028GYSC** 20AX Intermediate Toggle Switch Module - Grey - Satin Chrome
- GM209028GYSS** 20AX Intermediate Toggle Switch Module - Grey - Stainless Steel

**Standards:** BS EN 60669-1  
**Back Box Depth:** Dependent On Plate Used **Cable Size:** 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
**Dimensions:** 24.5mm (W) x 50mm (H) x 19.5mm (D)

DIMENSIONS (mm)

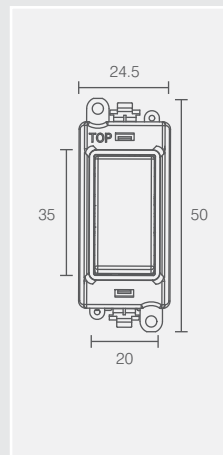

TYPICAL INTERMEDIATE SWITCHED CIRCUIT

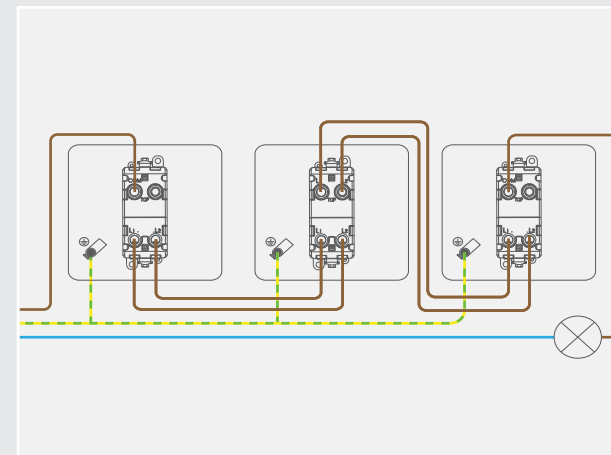

**Material Composition**

Rocker Switch: Plated Cast Copper  
 Cover, Insert & Rear Housing: Nylon  
 Terminals: Brass  
 Terminal Screws: Steel & Yellow Passivated  
 Silver "on-lay" Copper / Brass Contacts

<b>Voltage</b>	250V – 50Hz
<b>Current Rating</b>	20AX (suitable for inductive loads)
<b>Terminal Size</b>	ø 5mm
<b>Torque Value</b>	1.2Nm
<b>Cable Size</b>	2 x 4mm <sup>2</sup> , 3 x 2.5mm <sup>2</sup> or 1 x 6mm <sup>2</sup>
<b>Back Box Depth</b>	25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)
<b>Modular</b>	Yes
<b>Warranty</b>	10 Years
<b>Antimicrobial Certified</b>	No
<b>IP Rating</b>	IP20
<b>Operational Temperature</b>	-5°C to +40°C
<b>Standards</b>	BS EN 60669-1

**Additional Information:**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.




**20AX 2 Way Keyswitch Modules**


<a href="#">GM2003PW</a>	20AX 2 Way Keyswitch Module - White
<a href="#">GM2003BK</a>	20AX 2 Way Keyswitch Module - Black
<a href="#">GM2003PWBR</a>	20AX 2 Way Keyswitch Module - White - Polished Brass
<a href="#">GM2003PWBS</a>	20AX 2 Way Keyswitch Module - White - Brushed Stainless
<a href="#">GM2003PWCH</a>	20AX 2 Way Keyswitch Module - White - Polished Chrome
<a href="#">GM2003PWP</a>	20AX 2 Way Keyswitch Module - White - Pearl Nickel
<a href="#">GM2003PWSB</a>	20AX 2 Way Keyswitch Module - White - Satin Brass
<a href="#">GM2003PWSC</a>	20AX 2 Way Keyswitch Module - White - Satin Chrome
<a href="#">GM2003PWSS</a>	20AX 2 Way Keyswitch Module - White - Stainless Steel
<a href="#">GM2003BKAB</a>	20AX 2 Way Keyswitch Module - Black - Antique Brass
<a href="#">GM2003BKBN</a>	20AX 2 Way Keyswitch Module - Black - Black Nickel
<a href="#">GM2003BKBR</a>	20AX 2 Way Keyswitch Module - Black - Polished Brass
<a href="#">GM2003BKBS</a>	20AX 2 Way Keyswitch Module - Black - Brushed Stainless
<a href="#">GM2003BKCH</a>	20AX 2 Way Keyswitch Module - Black - Polished Chrome
<a href="#">GM2003BKPN</a>	20AX 2 Way Keyswitch Module - Black - Pearl Nickel
<a href="#">GM2003BKSB</a>	20AX 2 Way Keyswitch Module - Black - Satin Brass
<a href="#">GM2003BKSC</a>	20AX 2 Way Keyswitch Module - Black - Satin Chrome
<a href="#">GM2003BKSS</a>	20AX 2 Way Keyswitch Module - Black - Stainless Steel
<a href="#">GM2003GYBS</a>	20AX 2 Way Keyswitch Module - Grey - Brushed Stainless
<a href="#">GM2003GYSC</a>	20AX 2 Way Keyswitch Module - Grey - Satin Chrome
<a href="#">GM2003GYSS</a>	20AX 2 Way Keyswitch Module - Grey - Stainless Steel

Standards: BS EN 60669-1  
 Back Box Depth: Dependent On Plate Used. Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
 Dimensions: 24.5mm (W) x 50mm (H) x 22.5mm (D)

DIMENSIONS (mm)

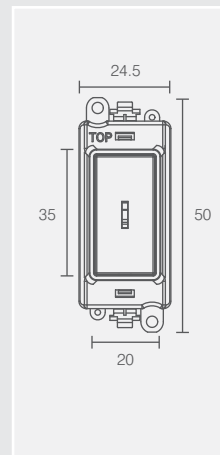

TYPICAL 2 WAY SWITCHED CIRCUIT

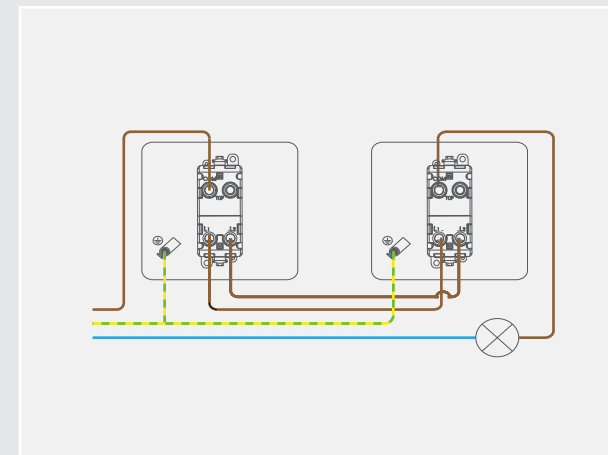

**Material Composition**

Cover: Nylon or Nylon + Stainless Steel Cover (Ingot)  
 Insert & Rear Housing: Nylon  
 Terminals: Brass  
 Terminal Screws: Steel & Yellow Passivated  
 Silver "on-lay" Copper / Brass Contacts

**Voltage**

250V – 50Hz

**Current Rating**

20AX (suitable for inductive loads)

**Terminal Size**

ø 5mm

**Torque Value**

1.2Nm

**Cable Size**

2 x 4mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup> or 1 x 6mm<sup>2</sup>

**Back Box Depth**

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)

**Modular**

Yes

**Warranty**

10 Years

**Antimicrobial Certified**

No

**IP Rating**

IP20

**Operational Temperature**

-5°C to +40°C

**Standards**

BS EN 60669-1

**Additional Information:**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



Retractive switches are not suitable for use with fluorescent loads.

**20AX 2 Way Retractive Keyswitch Modules**


<b>GM2014PW</b>	20AX 2 Way Retractive Keyswitch Module - White
<b>GM2014BK</b>	20AX 2 Way Retractive Keyswitch Module - Black
<b>GM2014PWBR</b>	20AX 2 Way Retractive Keyswitch Module - White - Polished Brass
<b>GM2014PWBS</b>	20AX 2 Way Retractive Keyswitch Module - White - Brushed Stainless
<b>GM2014PWCH</b>	20AX 2 Way Retractive Keyswitch Module - White - Polished Chrome
<b>GM2014PWPN</b>	20AX 2 Way Retractive Keyswitch Module - White - Pearl Nickel
<b>GM2014PWSB</b>	20AX 2 Way Retractive Keyswitch Module - White - Satin Brass
<b>GM2014PWSC</b>	20AX 2 Way Retractive Keyswitch Module - White - Satin Chrome
<b>GM2014PWSS</b>	20AX 2 Way Retractive Keyswitch Module - White - Stainless Steel
<b>GM2014BKAB</b>	20AX 2 Way Retractive Keyswitch Module - Black - Antique Brass
<b>GM2014BKBN</b>	20AX 2 Way Retractive Keyswitch Module - Black - Black Nickel
<b>GM2014BKBR</b>	20AX 2 Way Retractive Keyswitch Module - Black - Polished Brass
<b>GM2014BKBS</b>	20AX 2 Way Retractive Keyswitch Module - Black - Brushed Stainless
<b>GM2014BKCH</b>	20AX 2 Way Retractive Keyswitch Module - Black - Polished Chrome
<b>GM2014BKPN</b>	20AX 2 Way Retractive Keyswitch Module - Black - Pearl Nickel
<b>GM2014BKSB</b>	20AX 2 Way Retractive Keyswitch Module - Black - Satin Brass
<b>GM2014BKSC</b>	20AX 2 Way Retractive Keyswitch Module - Black - Satin Chrome
<b>GM2014BKSS</b>	20AX 2 Way Retractive Keyswitch Module - Black - Stainless Steel
<b>GM2014GYBS</b>	20AX 2 Way Retractive Keyswitch Module - Grey - Brushed Stainless
<b>GM2014GYSC</b>	20AX 2 Way Retractive Keyswitch Module - Grey - Satin Chrome
<b>GM2014GYSS</b>	20AX 2 Way Retractive Keyswitch Module - Grey - Stainless Steel

Standards: BS EN 60669-1  
 Back Box Depth: Dependent On Plate Used Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
 Dimensions: 24.5mm (W) x 50mm (H) x 22.5mm (D)

DIMENSIONS (mm)



TYPICAL RETRACTIVE SWITCH CIRCUIT

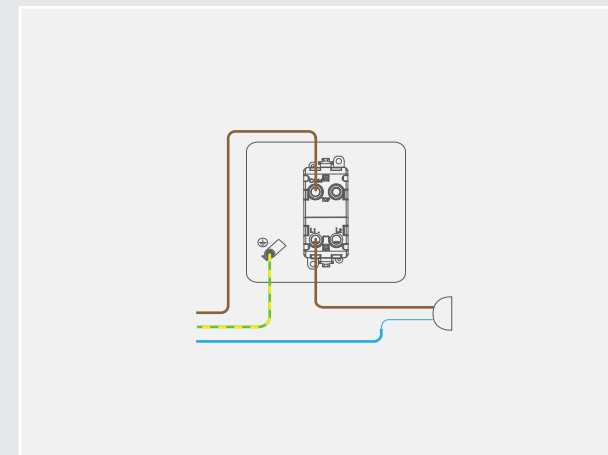

**Material Composition**

Cover: Nylon or Nylon + Stainless Steel Cover (Ingot)  
 Insert & Rear Housing: Nylon  
 Terminals: Brass  
 Terminal Screws: Steel & Yellow Passivated  
 Silver "on-lay" Copper / Brass Contacts

**Voltage**

250V – 50Hz

**Current Rating**

20AX

**Terminal Size**

ø 5mm

**Torque Value**

1.2Nm

**Cable Size**

2 x 4mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup> or 1 x 6mm<sup>2</sup>

**Back Box Depth**

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)

**Modular**

Yes

**Warranty**

10 Years

**Antimicrobial Certified**

No

**IP Rating**

IP20

**Operational Temperature**

-5°C to +40°C

**Standards**

BS EN 60669-1

**Additional Information:**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.




**20AX Intermediate Keyswitch Modules**


<b>GM2029PW</b>	20AX Intermediate Keyswitch Module - White
<b>GM2029BK</b>	20AX Intermediate Keyswitch Module - Black
<b>GM2029PWBR</b>	20AX Intermediate Keyswitch Module - White - Polished Brass
<b>GM2029PWBS</b>	20AX Intermediate Keyswitch Module - White - Brushed Stainless
<b>GM2029PWCH</b>	20AX Intermediate Keyswitch Module - White - Polished Chrome
<b>GM2029PWPN</b>	20AX Intermediate Keyswitch Module - White - Pearl Nickel
<b>GM2029PWBSB</b>	20AX Intermediate Keyswitch Module - White - Satin Brass
<b>GM2029PWSC</b>	20AX Intermediate Keyswitch Module - White - Satin Chrome
<b>GM2029PWSS</b>	20AX Intermediate Keyswitch Module - White - Stainless Steel
<b>GM2029BKAB</b>	20AX Intermediate Keyswitch Module - Black - Antique Brass
<b>GM2029BKBN</b>	20AX Intermediate Keyswitch Module - Black - Black Nickel
<b>GM2029BKBR</b>	20AX Intermediate Keyswitch Module - Black - Polished Brass
<b>GM2029BKBS</b>	20AX Intermediate Keyswitch Module - Black - Brushed Stainless
<b>GM2029BKCH</b>	20AX Intermediate Keyswitch Module - Black - Polished Chrome
<b>GM2029BKPN</b>	20AX Intermediate Keyswitch Module - Black - Pearl Nickel
<b>GM2029BKSB</b>	20AX Intermediate Keyswitch Module - Black - Satin Brass
<b>GM2029BKSC</b>	20AX Intermediate Keyswitch Module - Black - Satin Chrome
<b>GM2029BKSS</b>	20AX Intermediate Keyswitch Module - Black - Stainless Steel
<b>GM2029GYBS</b>	20AX Intermediate Keyswitch Module - Grey - Brushed Stainless
<b>GM2029GYSC</b>	20AX Intermediate Keyswitch Module - Grey - Satin Chrome
<b>GM2029GYSS</b>	20AX Intermediate Keyswitch Module - Grey - Stainless Steel

Standards: BS EN 60669-1  
 Back Box Depth: Dependent On Plate Used Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
 Dimensions: 24.5mm (W) x 50mm (H) x 22.5mm (D)

DIMENSIONS (mm)

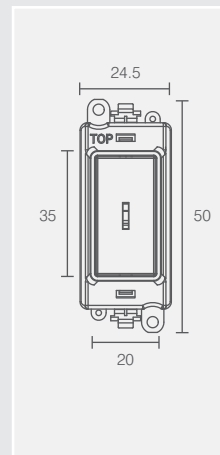

TYPICAL INTERMEDIATE SWITCHED CIRCUIT

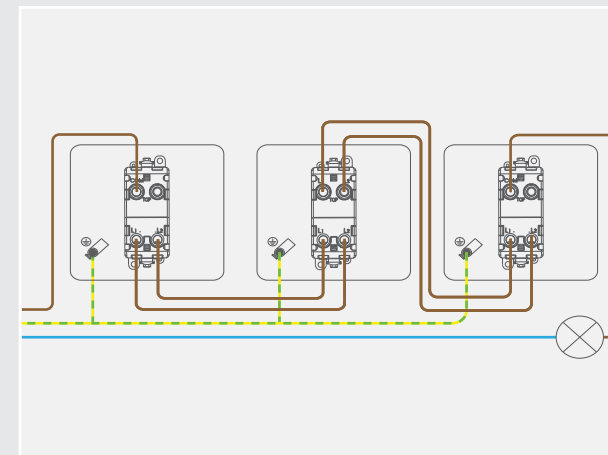

**Material Composition**

Cover: Nylon or Nylon + Stainless Steel Cover (Ingot)  
 Insert & Rear Housing: Nylon  
 Terminals: Brass  
 Terminal Screws: Steel & Yellow Passivated  
 Silver "on-lay" Copper / Brass Contacts

**Voltage**

250V – 50Hz

**Current Rating**

20AX (suitable for inductive loads)

**Terminal Size**

ø 5mm

**Torque Value**

1.2Nm

**Cable Size**

2 x 4mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup> or 1 x 6mm<sup>2</sup>

**Back Box Depth**

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)

**Modular**

Yes

**Warranty**

10 Years

**Antimicrobial Certified**

No

**IP Rating**

IP20

**Operational Temperature**

-5°C to +40°C

**Standards**

BS EN 60669-1


**Additional Information:**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.






DIMENSIONS (mm)

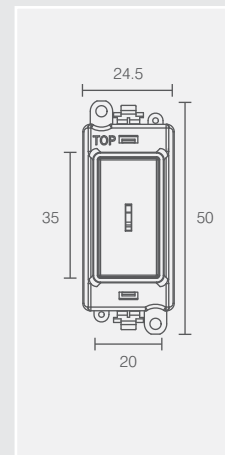

TYPICAL WIRING DIAGRAM

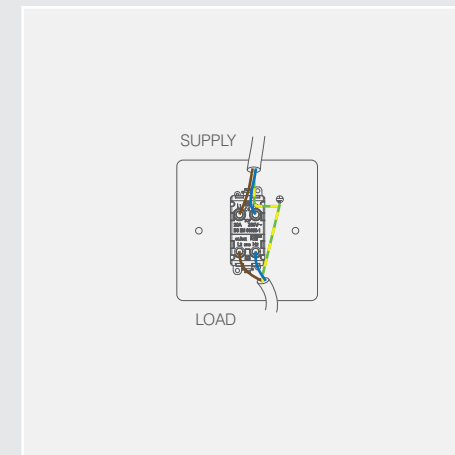

**20AX Double Pole Keyswitch Modules**

<b>GM2046PW</b>	20AX Double Pole Keyswitch Module - White
<b>GM2046BK</b>	20AX Double Pole Keyswitch Module - Black
<b>GM2046PWBR</b>	20AX Double Pole Keyswitch Module - White - Polished Brass
<b>GM2046PWBS</b>	20AX Double Pole Keyswitch Module - White - Brushed Stainless
<b>GM2046PWCH</b>	20AX Double Pole Keyswitch Module - White - Polished Chrome
<b>GM2046PWP</b>	20AX Double Pole Keyswitch Module - White - Pearl Nickel
<b>GM2046PWSB</b>	20AX Double Pole Keyswitch Module - White - Satin Brass
<b>GM2046PWSC</b>	20AX Double Pole Keyswitch Module - White - Satin Chrome
<b>GM2046PWS</b>	20AX Double Pole Keyswitch Module - White - Stainless Steel
<b>GM2046BKAB</b>	20AX Double Pole Keyswitch Module - Black - Antique Brass
<b>GM2046BKBN</b>	20AX Double Pole Keyswitch Module - Black - Black Nickel
<b>GM2046BKBR</b>	20AX Double Pole Keyswitch Module - Black - Polished Brass
<b>GM2046BKBS</b>	20AX Double Pole Keyswitch Module - Black - Brushed Stainless
<b>GM2046BKCH</b>	20AX Double Pole Keyswitch Module - Black - Polished Chrome
<b>GM2046BKPN</b>	20AX Double Pole Keyswitch Module - Black - Pearl Nickel
<b>GM2046BKSB</b>	20AX Double Pole Keyswitch Module - Black - Satin Brass
<b>GM2046BKSC</b>	20AX Double Pole Keyswitch Module - Black - Satin Chrome
<b>GM2046BKSS</b>	20AX Double Pole Keyswitch Module - Black - Stainless Steel
<b>GM2046GYBS</b>	20AX Double Pole Keyswitch Module - Grey - Brushed Stainless
<b>GM2046GYSC</b>	20AX Double Pole Keyswitch Module - Grey - Satin Chrome
<b>GM2046GYSS</b>	20AX Double Pole Keyswitch Module - Grey - Stainless Steel

Standards: BS EN 60669-1  
 Back Box Depth: Dependent On Plate Used Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
 Dimensions: 24.5mm (W) x 50mm (H) x 22.5mm (D)

**Material Composition**

Cover: Nylon or Nylon + Stainless Steel Cover (Ingot)  
 Insert & Rear Housing: Nylon  
 Terminals: Brass, Terminal Screws: Steel & Yellow Passivated  
 Silver "on-lay" Copper / Brass Contacts

**Voltage**

250V ~ 50Hz

**Current Rating**

20AX

**Terminal Size**

ø 5mm

**Torque Value**

1.2Nm

**Cable Size**

2 x 4mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup> or 1 x 6mm<sup>2</sup>

**Back Box Depth**

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity™)

**Double Pole**

Yes

**Modular**

Yes

**Warranty**

10 Years

**Antimicrobial Certified**

No

**IP Rating**

IP20

**Operational Temperature**

-5°C to +40°C

**Standards**


BS EN 60669-1

**Additional Information:**


Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.



DIMENSIONS (mm)

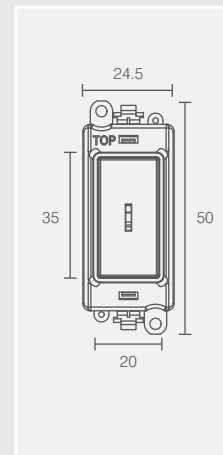

TYPICAL WIRING DIAGRAM

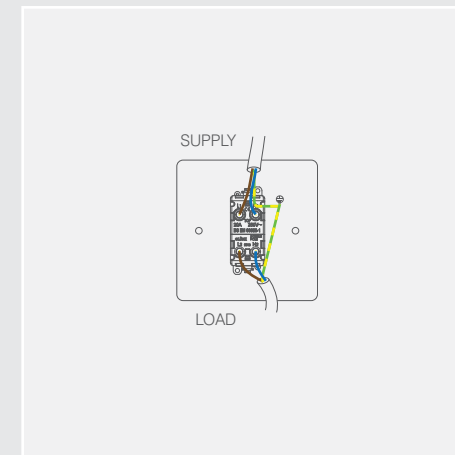

**20AX Double Pole Keyswitch Modules - 'Emergency Test'**

- GM2046BKET** 20AX Double Pole Keyswitch 'Emergency Test' - Black
- GM2046PWET** 20AX Double Pole Keyswitch 'Emergency Test' - White
- GM2046PWBRET** 20AX Double Pole Keyswitch 'Emergency Test' - White - Polished Brass
- GM2046PWBSET** 20AX Double Pole Keyswitch 'Emergency Test' - White - Brushed Stainless
- GM2046PWCHET** 20AX Double Pole Keyswitch 'Emergency Test' - White - Polished Chrome
- GM2046PWPNET** 20AX Double Pole Keyswitch 'Emergency Test' - White - Pearl Nickel
- GM2046PWSBET** 20AX Double Pole Keyswitch 'Emergency Test' - White - Satin Brass
- GM2046PWSCET** 20AX Double Pole Keyswitch 'Emergency Test' - White - Satin Chrome
- GM2046PWSSET** 20AX Double Pole Keyswitch 'Emergency Test' - White - Stainless Steel
- GM2046BKABET** 20AX Double Pole Keyswitch 'Emergency Test' - Black - Antique Brass
- GM2046BKBNET** 20AX Double Pole Keyswitch 'Emergency Test' - Black - Black Nickel
- GM2046BKBBRET** 20AX Double Pole Keyswitch 'Emergency Test' - Black - Polished Brass
- GM2046BKBSRET** 20AX Double Pole Keyswitch 'Emergency Test' - Black - Brushed Stainless
- GM2046BKCHET** 20AX Double Pole Keyswitch 'Emergency Test' - Black - Polished Chrome
- GM2046BKPNET** 20AX Double Pole Keyswitch 'Emergency Test' - Black - Pearl Nickel
- GM2046BKSBRET** 20AX Double Pole Keyswitch 'Emergency Test' - Black - Satin Brass
- GM2046BKSCRET** 20AX Double Pole Keyswitch 'Emergency Test' - Black - Satin Chrome
- GM2046BKSSRET** 20AX Double Pole Keyswitch 'Emergency Test' - Black - Stainless Steel
- GM2046GYBSET** 20AX Double Pole Keyswitch 'Emergency Test' - Grey - Brushed Stainless
- GM2046GYSRET** 20AX Double Pole Keyswitch 'Emergency Test' - Grey - Satin Chrome
- GM2046GYSSET** 20AX Double Pole Keyswitch 'Emergency Test' - Grey - Stainless Steel

**Material Composition**

Cover: Nylon or Nylon + Stainless Steel Cover (Ingot)  
 Insert & Rear Housing: Nylon  
 Terminals: Brass, Terminal Screws: Steel & Yellow Passivated  
 Silver "on-lay" Copper / Brass Contacts

**Voltage**

250V ~ 50Hz

**Current Rating**

20AX

**Terminal Size**

ø 5mm

**Torque Value**

1.2Nm

**Cable Size**

2 x 4mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup> or 1 x 6mm<sup>2</sup>

**Back Box Depth**

25mm - 47mm (Deco, Deco Plus, Mode, Polar) 35mm - 47mm (Define, Definity)

**Double Pole**

Yes

**Modular**

Yes

**Warranty**

10 Years

**Antimicrobial Certified**

No

**IP Rating**

IP20

**Operational Temperature**

-5°C to +40°C

**Standards**

BS EN 60669-1

**Additional Information:**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.


Standards: BS EN 60669-1

Back Box Depth: Dependent On Plate Used Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>


Dimensions: 24.5mm (W) x 50mm (H) x 22.5mm (D)



DIMENSIONS (mm)

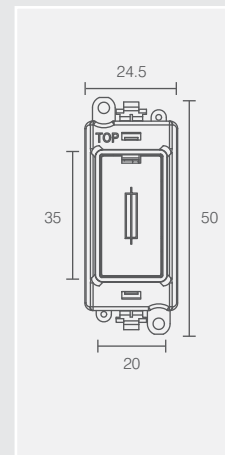

TYPICAL WIRING DIAGRAM

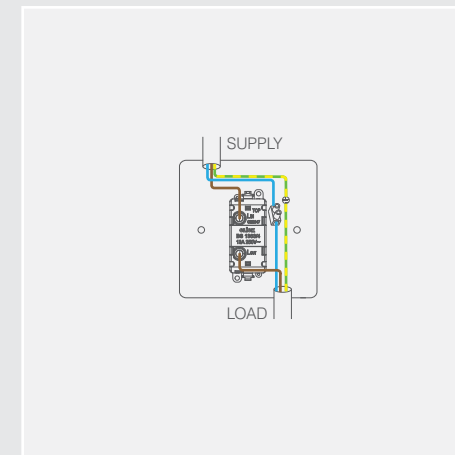

**13A Fused Modules**

- GM2047PW** 13A Fused Module - White
- GM2047BK** 13A Fused Module - Black
- GM2047PWBR** 13A Fused Module - White - Polished Brass
- GM2047PWBS** 13A Fused Module - White - Brushed Stainless
- GM2047PWCH** 13A Fused Module - White - Polished Chrome
- GM2047PWPN** 13A Fused Module - White - Pearl Nickel
- GM2047PWBSB** 13A Fused Module - White - Satin Brass
- GM2047PWSC** 13A Fused Module - White - Satin Chrome
- GM2047PWSS** 13A Fused Module - White - Stainless Steel
- GM2047BKAB** 13A Fused Module - Black - Antique Brass
- GM2047BKBN** 13A Fused Module - Black - Black Nickel
- GM2047BKBR** 13A Fused Module - Black - Polished Brass
- GM2047BKBS** 13A Fused Module - Black - Brushed Stainless
- GM2047BKCH** 13A Fused Module - Black - Polished Chrome
- GM2047BKPN** 13A Fused Module - Black - Pearl Nickel
- GM2047BKSB** 13A Fused Module - Black - Satin Brass
- GM2047BKSC** 13A Fused Module - Black - Satin Chrome
- GM2047BKSS** 13A Fused Module - Black - Stainless Steel
- GM2047GYBS** 13A Fused Module - Grey - Brushed Stainless
- GM2047GYSC** 13A Fused Module - Grey - Satin Chrome
- GM2047GYSS** 13A Fused Module - Grey - Stainless Steel

**Standards:** BS 1363-4 BS 1362  
**Back Box Depth:** Dependent On Plate Used **Cable Size:** 3 x 2.5mm<sup>2</sup>, 2 x 4mm<sup>2</sup>  
**Dimensions:** 24.5mm (W) x 50mm (H) x 25mm (D)

**Material Composition**

Cover: Nylon or Nylon + Stainless Steel Cover (Ingot)  
 Insert & Rear Housing: Nylon  
 Terminals: Brass, Terminal Screws: Steel & Yellow Passivated

**Voltage**

250V ~ 50Hz

**Current Rating**

13A

**Terminal Size**

ø 5mm

**Torque Value**

1.2Nm

**Cable Size**

2 x 4mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup> or 1 x 6mm<sup>2</sup>

**Back Box Depth**

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)

**Lockable**

No

**Modular**

Yes

**Warranty**

10 Years

**Antimicrobial Certified**

No

**IP Rating**

IP20

**Operational Temperature**

-5°C to +40°C

**Standards**


BS 1363-4

**Additional Information:**


Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 13A; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.



DIMENSIONS (mm)

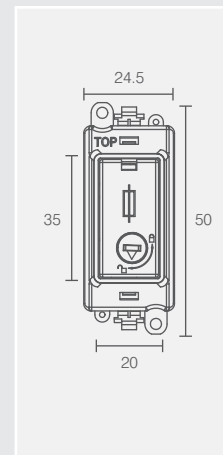

TYPICAL WIRING DIAGRAM

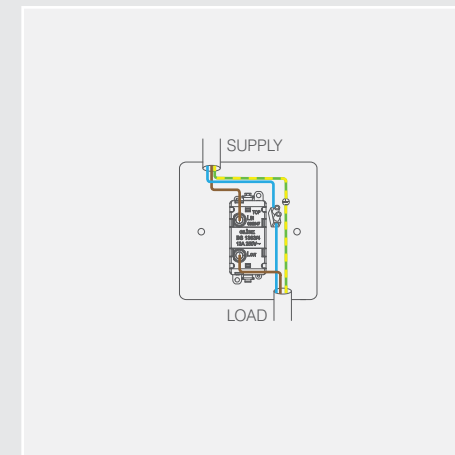

**13A Lockable Fused Modules**

<b>GM2047-LPW</b>	13A Fused Lockable Module - White
<b>GM2047-LBK</b>	13A Fused Lockable Module - Black
<b>GM2047-LPWBR</b>	13A Fused Lockable Module - White - Polished Brass
<b>GM2047-LPWBS</b>	13A Fused Lockable Module - White - Brushed Stainless
<b>GM2047-LPWCH</b>	13A Fused Lockable Module - White - Polished Chrome
<b>GM2047-LPWPB</b>	13A Fused Lockable Module - White - Pearl Nickel
<b>GM2047-LPWSB</b>	13A Fused Lockable Module - White - Satin Brass
<b>GM2047-LPWSC</b>	13A Fused Lockable Module - White - Satin Chrome
<b>GM2047-LPWSS</b>	13A Fused Lockable Module - White - Stainless Steel
<b>GM2047-LBKAB</b>	13A Fused Lockable Module - Black - Antique Brass
<b>GM2047-LBKBN</b>	13A Fused Lockable Module - Black - Black Nickel
<b>GM2047-LBKBR</b>	13A Fused Lockable Module - Black - Polished Brass
<b>GM2047-LBKBS</b>	13A Fused Lockable Module - Black - Brushed Stainless
<b>GM2047-LBKCH</b>	13A Fused Lockable Module - Black - Polished Chrome
<b>GM2047-LBKPN</b>	13A Fused Lockable Module - Black - Pearl Nickel
<b>GM2047-LBKSB</b>	13A Fused Lockable Module - Black - Satin Brass
<b>GM2047-LBKSC</b>	13A Fused Lockable Module - Black - Satin Chrome
<b>GM2047-LBKSS</b>	13A Fused Lockable Module - Black - Stainless Steel
<b>GM2047-LGYBS</b>	13A Fused Lockable Module - Grey - Brushed Stainless
<b>GM2047-LGYSC</b>	13A Fused Lockable Module - Grey - Satin Chrome
<b>GM2047-LGYSS</b>	13A Fused Lockable Module - Grey - Stainless Steel

Standards: BS 1363-4 BS 1362  
 Back Box Depth: Dependent On Plate Used Cable Size: 3 x 2.5mm<sup>2</sup>, 2 x 4mm<sup>2</sup>  
 Dimensions: 24.5mm (W) x 50mm (H) x 25mm (D)

**Material Composition**

Cover: Nylon or Nylon + Stainless Steel Cover (Ingot)  
 Insert & Rear Housing: Nylon  
 Terminals: Brass, Terminal Screws: Steel & Yellow Passivated

**Voltage**

250V ~ 50Hz

**Current Rating**

13A

**Terminal Size**

ø 5mm

**Torque Value**

1.2Nm

**Cable Size**

2 x 4mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup> or 1 x 6mm<sup>2</sup>

**Back Box Depth**

25mm - 47mm (Deco, Deco Plus, Mode, Polar) 35mm - 47mm (Define, Definity)

**Lockable**

GM2047-L Only

**Modular**

Yes

**Warranty**

10 Years

**Antimicrobial Certified**

No

**IP Rating**

IP20

**Operational Temperature**

-5°C to +40°C

**Standards**


BS 1363-4

**Additional Information:**


Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 13A; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.



DIMENSIONS (mm)

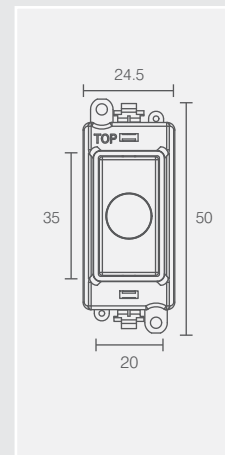

TYPICAL WIRING DIAGRAM

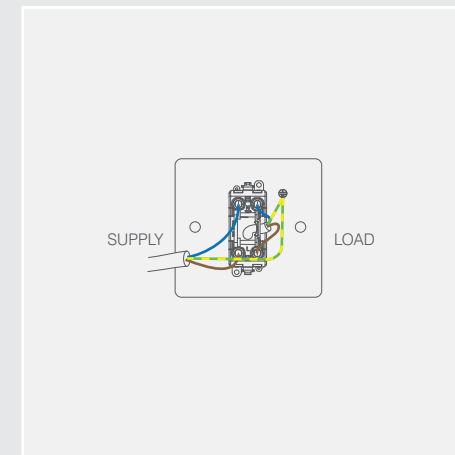

**20A Flex Outlet Modules**

- GM2017PW** 20A Flex Outlet Module - White
- GM2017BK** 20A Flex Outlet Module - Black
- GM2017PWBR** 20A Flex Outlet Module - White - Polished Brass
- GM2017PWBS** 20A Flex Outlet Module - White - Brushed Stainless
- GM2017PWCH** 20A Flex Outlet Module - White - Polished Chrome
- GM2017PWPB** 20A Flex Outlet Module - White - Pearl Nickel
- GM2017PWSB** 20A Flex Outlet Module - White - Satin Brass
- GM2017PWSC** 20A Flex Outlet Module - White - Satin Chrome
- GM2017PWSS** 20A Flex Outlet Module - White - Stainless Steel
- GM2017BKAB** 20A Flex Outlet Module - Black - Antique Brass
- GM2017BKBN** 20A Flex Outlet Module - Black - Black Nickel
- GM2017BKBR** 20A Flex Outlet Module - Black - Polished Brass
- GM2017BKBS** 20A Flex Outlet Module - Black - Brushed Stainless
- GM2017BKCH** 20A Flex Outlet Module - Black - Polished Chrome
- GM2017BKPN** 20A Flex Outlet Module - Black - Pearl Nickel
- GM2017BKSB** 20A Flex Outlet Module - Black - Satin Brass
- GM2017BKSC** 20A Flex Outlet Module - Black - Satin Chrome
- GM2017BKSS** 20A Flex Outlet Module - Black - Stainless Steel
- GM2017GYBS** 20A Flex Outlet Module - Grey - Brushed Stainless
- GM2017GYSC** 20A Flex Outlet Module - Grey - Satin Chrome
- GM2017GYSS** 20A Flex Outlet Module - Grey - Stainless Steel

Standards: BS 5733  
 Back Box Depth: Dependent On Plate Used Cable Size: 3 x 2.5mm<sup>2</sup>, 2 x 4mm<sup>2</sup>  
 Dimensions: 24.5mm (W) x 50mm (H) x 28mm (D)

**Material Composition**

Cover: Nylon or Nylon + Stainless Steel Cover (Ingot)  
 Insert & Rear Housing: Nylon  
 Terminals: Brass  
 Terminal Screws: Steel & Yellow Passivated

**Voltage**

250V ~ 50Hz

**Current Rating**

20A

**Terminal Size**

ø 5mm

**Torque Value**

1.2Nm

**Cable Size**

2 x 4mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup> or 1 x 6mm<sup>2</sup>

**Back Box Depth**

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)

**Modular**

Yes

**Warranty**

10 Years

**Antimicrobial Certified**

No

**IP Rating**

IP20

**Operational Temperature**

-5°C to +40°C


**Standards**

BS 5733

**Additional Information:**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20A; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.



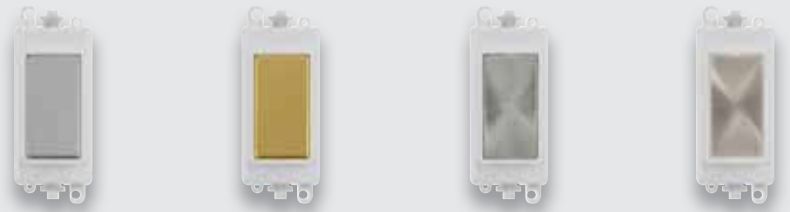


GM2008PWCH GM2008PWBR GM2008PWSC GM2008PWBS



GM2008BKBN GM2008BKPN GM2008BKSB MODULE BACK

DIMENSIONS (mm)

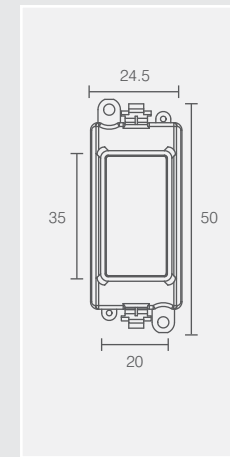

**Blank Modules**

- GM2008PW Blank Module - White
- GM2008BK Blank Module - Black
- GM2008PWBR Blank Module - White - Polished Brass
- GM2008PWBS Blank Module - White - Brushed Stainless
- GM2008PWCH Blank Module - White - Polished Chrome
- GM2008PWPN Blank Module - White - Pearl Nickel
- GM2008PWBSB Blank Module - White - Satin Brass
- GM2008PWSC Blank Module - White - Satin Chrome
- GM2008PWSS Blank Module - White - Stainless Steel
- GM2008BKAB Blank Module - Black - Antique Brass
- GM2008BKBN Blank Module - Black - Black Nickel
- GM2008BKBR Blank Module - Black - Polished Brass
- GM2008BKBS Blank Module - Black - Brushed Stainless
- GM2008BKCH Blank Module - Black - Polished Chrome
- GM2008BKPN Blank Module - Black - Pearl Nickel
- GM2008BKSB Blank Module - Black - Satin Brass
- GM2008BKSC Blank Module - Black - Satin Chrome
- GM2008BKSS Blank Module - Black - Stainless Steel
- GM2008GYBS Blank Module - Grey - Brushed Stainless
- GM2008GYSC Blank Module - Grey - Satin Chrome
- GM2008GYSS Blank Module - Grey - Stainless Steel

Standards: BS 5733  
 Back Box Depth: 25mm Minimum  
 Dimensions: 24.5mm (W) x 50mm (H) x 12mm (D)

**Material Composition**

Module Front: Nylon or Nylon + Stainless Steel Cover (Ingot)  
 Cover, Insert & Rear Housing: Nylon

**Back Box Depth**

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)

**Modular**

Yes

**Warranty**

10 Years

**Antimicrobial Certified**

No

**IP Rating**

IP20

**Operational Temperature**

-5°C to +40°C

**Standards**

BS 5733

**Additional Information:**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.



GM2080PW



GM2081PW



GM2082PW



GM2080BK



GM2081BK




GM2082BK




MODULE BACK

DIMENSIONS (mm)

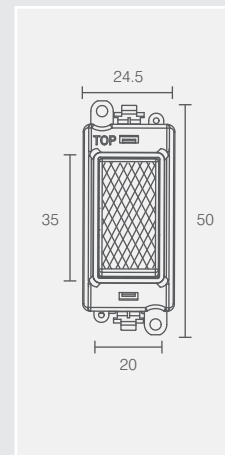

TYPICAL WIRING DIAGRAM

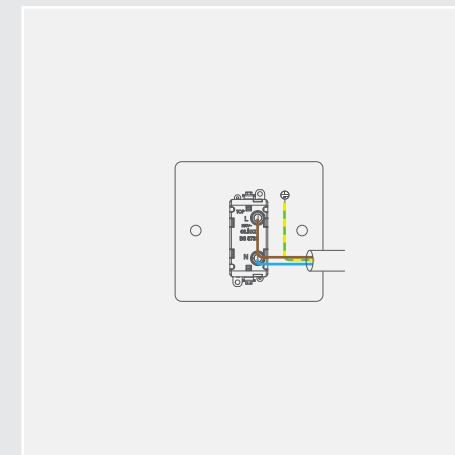

**Indicator Modules**

- GM2080BK** 240V~ Red Indicator Module - Black
- GM2080PW** 240V~ Red Indicator Module - White
- GM2080GY** 240V~ Red Indicator Module - Grey
- GM2081BK** 240V~ Amber Indicator Module - Black
- GM2081PW** 240V~ Amber Indicator Module - White
- GM2081GY** 240V~ Amber Indicator Module - Grey
- GM2082BK** 240V~ Green Indicator Module - Black
- GM2082PW** 240V~ Green Indicator Module - White
- GM2082GY** 240V~ Green Indicator Module - Grey

Standards: BS 5733  
 Back Box Depth: Dependent On Plate Used  
 Cable Size: 3 x 2.5mm<sup>2</sup>, 2 x 4mm<sup>2</sup>  
 Dimensions: 24.5mm (W) x 50mm (H) x 22.5mm (D)

**Material Composition**

Indicator Lens: Polycarbonate / ABS  
 Cover, Insert & Rear Housing: Nylon  
 Terminals: Brass, Terminal Screws: Steel & Yellow Passivated

- Voltage** 250V ~ 50Hz
- Terminal Size** ø 5mm
- Torque Value** 1.2Nm
- Cable Size** 2 x 4mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup> or 1 x 6mm<sup>2</sup>
- Back Box Depth** 25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)
- Modular** Yes
- Warranty** 10 Years
- IP Rating** IP20
- Operational Temperature** -5°C to +40°C
- Standards** BS 5733

**Additional Information:**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.



GM2008GTAB

GM2008RTBS

GM2008GTPW

MODULE BACK

**IN HOUSE LASER ETCHING**

Our in house laser printer provides flexibility to suit large volume batch or custom jobs. The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.

Ideal for Hotel locations.

See the range of compatible Hotel Accessory Plates in the GridPro® range of frontplates.

**Green Blank LED Illuminated Modules**

- GM2008GTBK** 250V~ Green LED Transparent Illuminated Blank Module - Black
- GM2008GTPW** 250V~ Green LED Transparent Illuminated Blank Module - White
- GM2008GTAB** 250V~ Green LED Transparent Illuminated Blank Module - Antique Brass
- GM2008GTBN** 250V~ Green LED Transparent Illuminated Blank Module - Black Nickel
- GM2008GTBR** 250V~ Green LED Transparent Illuminated Blank Module - Polished Brass
- GM2008GTBS** 250V~ Green LED Transparent Illuminated Blank Module - Brushed Steel
- GM2008GTCH** 250V~ Green LED Transparent Illuminated Blank Module - Polished Chrome
- GM2008GTPN** 250V~ Green LED Transparent Illuminated Blank Module - Pearl Nickel
- GM2008GTSB** 250V~ Green LED Transparent Illuminated Blank Module - Satin Brass
- GM2008GTSC** 250V~ Green LED Transparent Illuminated Blank Module - Satin Chrome
- GM2008GTSS** 250V~ Green LED Transparent Illuminated Blank Module - Stainless Steel

**Red Blank LED Illuminated Modules**


- GM2008RTBK** 250V~ Red LED Transparent Illuminated Blank Module - Black
- GM2008RTPW** 250V~ Red LED Transparent Illuminated Blank Module - White
- GM2008RTAB** 250V~ Red LED Transparent Illuminated Blank Module - Antique Brass
- GM2008RTBN** 250V~ Red LED Transparent Illuminated Blank Module - Black Nickel
- GM2008RTBR** 250V~ Red LED Transparent Illuminated Blank Module - Polished Brass
- GM2008RTBS** 250V~ Red LED Transparent Illuminated Blank Module - Brushed Steel
- GM2008RTCH** 250V~ Red LED Transparent Illuminated Blank Module - Polished Chrome
- GM2008RTPN** 250V~ Red LED Transparent Illuminated Blank Module - Pearl Nickel
- GM2008RTSB** 250V~ Red LED Transparent Illuminated Blank Module - Satin Brass
- GM2008RTSC** 250V~ Red LED Transparent Illuminated Blank Module - Satin Chrome
- GM2008RTSS** 250V~ Red LED Transparent Illuminated Blank Module - Stainless Steel

Standards: BS 5733


Back Box Depth: Dependent on Plate Used Cable Size: 3 x 2.5mm<sup>2</sup>, 2 x 4mm<sup>2</sup>

Dimensions: 24.5mm (W) x 50mm (H) x 19.5mm (D)

DIMENSIONS (mm)

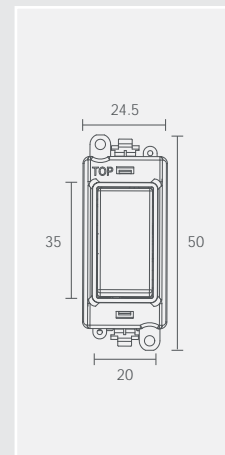

TYPICAL WIRING DIAGRAM

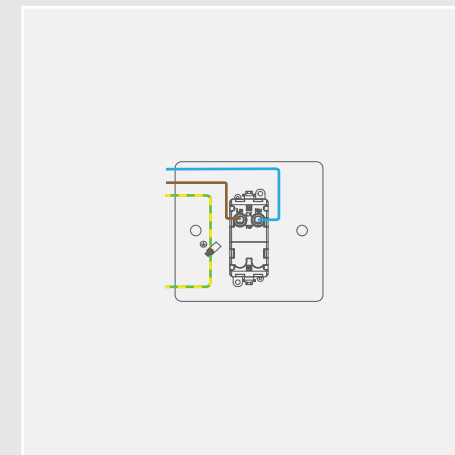

**Material Composition**

Transparent Trim: Polycarbonate  
 Blank Section: Decorative (Stainless Steel), Moulded (Polycarbonate)  
 Rear Housing: Nylon  
 Terminals: Brass  
 Terminal Screws: Steel & Yellow Passivated

**Voltage**

250V – 50Hz

**Terminal Size**

ø 5mm

**Torque Value**

1.2Nm

**Cable Size**

2 x 4mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup> or 1 x 6mm<sup>2</sup>

**Back Box Depth**

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)

**Modular**

Yes

**Warranty**

10 Years

**Anti Microbial Certified**

No

**IP Rating**

IP20

**Operational Temperature**


+5°C to +40°C

**Standards**

BS 5733

**Additional Information:**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

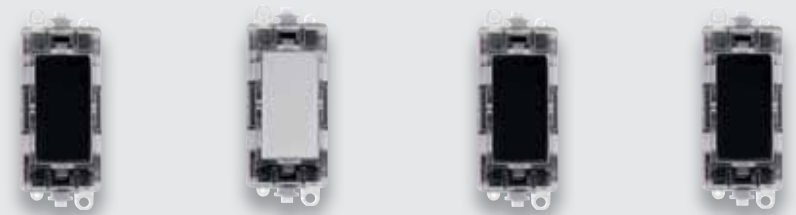

GM2001BTBK GM2002BTPW GM2028BTBK GM2018BTBK



GM2001BT MODULE BACK GM2002BT MODULE BACK GM2028BT MODULE BACK GM2018BT MODULE BACK

**20AX Locator Switch Modules (Blue LED)**

- GM2001BTBK** 20AX 1 Way Locator Black Switch Module With Transparent Surround
- GM2001BTPW** 20AX 1 Way Locator White Switch Module With Transparent Surround
- GM2002BTBK** 20AX 2 Way Locator Black Switch Module With Transparent Surround
- GM2002BTPW** 20AX 2 Way Locator White Switch Module With Transparent Surround
- GM2028BTBK** 20AX Intermediate Switch Module - Black With Transparent Surround
- GM2028BTPW** 20AX Intermediate Switch Module - White With Transparent Surround

The switch will illuminate when the switch is in the 'OFF' position.

**20AX Indicator Switch Modules (Blue LED)**

- GM2018BTBK** 20AX Double Pole Switch Module - Black With Transparent Surround
- GM2018BTPW** 20AX Double Pole Switch Module - White With Transparent Surround


The switch will illuminate when the switch is in the 'ON' position.

**Standards:** BS EN 60669-1


**Back Box Depth:** Dependent on Plate Used **Cable Size:** 3 x 2.5mm<sup>2</sup>, 2 x 4mm<sup>2</sup>

**Dimensions:** 24.5mm (W) x 50mm (H) x 22.5mm (D)


TYPICAL 1 WAY SWITCHED CIRCUIT

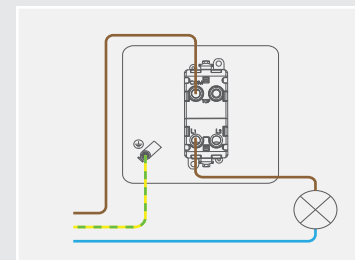

TYPICAL DOUBLE POLE WIRING DIAGRAM

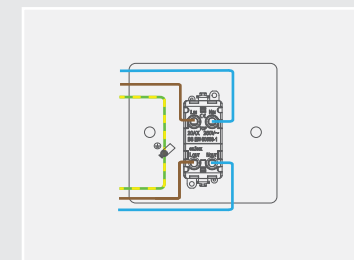

TYPICAL 2 WAY SWITCHED CIRCUIT

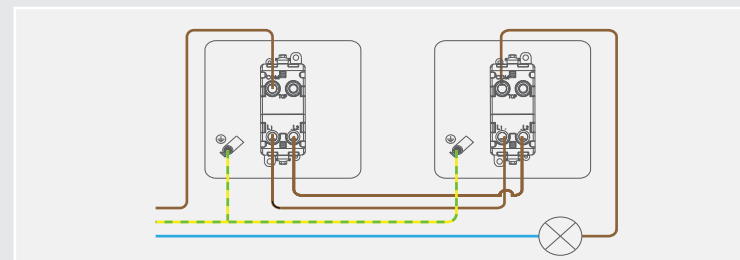

**Material Composition**

Transparent Trim: Polycarbonate Switch: Urea  
Rear Housing: Nylon  
Terminals: Brass  
Terminal Screws: Steel & Yellow Passivated  
Contacts: Silver "on-lay" Copper / Brass

**Voltage**

250V – 50Hz

**Current Rating**

20AX (suitable for inductive loads)

**Terminal Size**

ø 5mm

**Torque Value**

1.2Nm

**Cable Size**

2 x 4mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup> or 1 x 6mm<sup>2</sup>

**Back Box Depth**

25mm - 47mm (Deco®, Deco Plus, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)

**Modular**

Yes

**Warranty**

10 Years

**Anti Microbial Certified**

Yes (Non Ingot Switches Only)

**IP Rating**

IP20

**Operational Temperature**

+5°C to +40°C

**Standards**

BS EN 60669-1

**Additional Information:**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.



**Buzzer Module**

- GM2650BK** 230V~ Buzzer Unit Module - Black
- GM2650PW** 230V~ Buzzer Unit Module - White

**Time Delay Switch Modules**

- GM2600BK** 230V~ Time Delay Switch 300W - Black
  - GM2600PW** 230V~ Time Delay Switch 300W - White
- Time Settings: 10 minutes or 30 minutes


**USB Connection Modules**

- GM2300BK** USB Throughput Module - Black
  - GM2300PW** USB Throughput Module - White
- Flylead: 95mm overall length

**USB Charging Modules**

- GM2515BK** 2.4A USB Charging Modules - Black
- GM2515WH** 2.4A USB Charging Modules - White

**Standards:** 2300: BS EN 62368-1 BS EN 61000-6-1 BS EN 61000-6-3 2650 2600: BS 5733  
**Back Box Depth:** Dependent on Plate Used  
**Cable Size:** 2650 2600: 2 x 1.5mm<sup>2</sup> 2300 2515: 3 x 2.5mm<sup>2</sup>, 2 x 4mm<sup>2</sup> or 1 x 6.0mm<sup>2</sup>  
**Dimensions:** 2300 2515: 24.5mm (W) x 50mm (H) x 40mm (D)  
 2650: 24.5mm (W) x 50mm (H) x 31.5mm (D)  
 2600: 24.5mm (W) x 50mm (H) x 25mm (D)

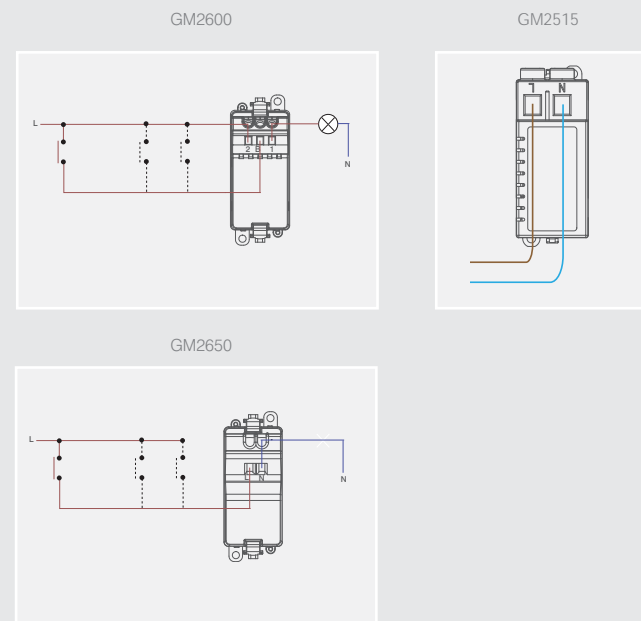

	GM2600	GM2650	GM2300	GM2515
<b>Material Composition</b>	Cover, Insert & Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated			
<b>Voltage</b>	240V	200-250V	30V DC MAX	240V
<b>USB Type</b>	N/A	N/A	2 x Type A	Type A
<b>USB Charging Output</b>	N/A	N/A	N/A	5V DC 2.4A
<b>Cable Size</b>	2 x 1.5mm <sup>2</sup>	2 x 1.5mm <sup>2</sup>	N/A	2 x 1.5mm <sup>2</sup>
<b>Terminal Type</b>	Screw Terminals	Screw Terminals	N/A	Screw Terminals
<b>Back Box Depth</b>	35mm (Deco/Deco Plus/Mode/Polar) 47mm (Define/Definity)	25mm (Deco/Deco Plus/Mode/Polar) 35mm (Define/Definity)	35mm (Deco/Deco Plus/Mode/Polar) 47mm (Define/Definity)	35mm (Deco/Deco Plus/Mode/Polar) 47mm (Define/Definity)
<b>Modular</b>	Yes			
<b>Warranty</b>	10 Years (1 Year Electronics)			
<b>Anti Microbial Certified</b>	No			
<b>IP Rating</b>	IP20			
<b>Operational Temperature</b>	-5°C to +40°C			
<b>Standards</b>	BS5733	BS5733	N/A	BS EN 62368-1, BS EN 61000-6-1, BS EN 61000-6-3:

**Additional Information:**  
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.  
 Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.  
 All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.





GM2490PW

GM2495PW

GM2497PW

GM2496BK

GM2490  
MODULE BACK


GM2495  
MODULE BACK

GM2497  
MODULE BACK

GM2490

GM2495

GM2497

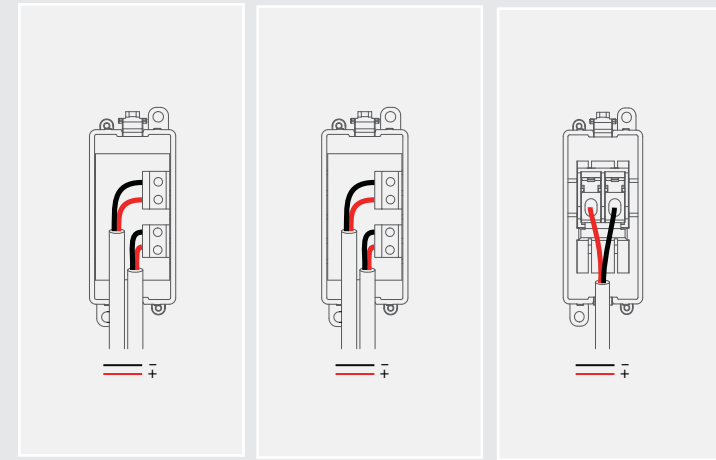

**Media Modules**

**GM2490BK** RCA X 2 Outlet Module - Black  
**GM2490PW** RCA X 2 Outlet Module - White

**GM2495BK** Loudspeaker X 2 Outlet Module - Black  
**GM2495PW** Loudspeaker X 2 Outlet Module - White

**GM2496BK** 3.5mm Audio Jack Module - Black  
**GM2496PW** 3.5mm Audio Jack Module - White  
 Flylead: 98mm overall length

**GM2497BK** HIFI Module- Black  
**GM2497PW** HIFI Module - White

**Back Box Depth:** Dependent on Plate Used **Cable Size:** Dependant on module used  
**Warranty:** 10 Years (1 Year Electronics)

**Dimensions:** GM2490: 24.5mm (W) x 50mm (H) x 15mm (D) GM2495: 24.5mm (W) x 50mm (H) x 13.5mm (D)  
 GM2496: 24.5mm (W) x 50mm (H) x 35mm (D) GM2497: 24.5mm (W) x 50mm (H) x 19.5mm (D)

**Material Composition**

GM2490 GM2495 GM2496 GM2497

Cover, Insert & Rear Housing: Nylon

Terminals: Brass

Terminal Screws: Steel & Yellow Passivated

<b>Cable Size</b>	2 x 1.5mm <sup>2</sup>	2 x 1.5mm <sup>2</sup>	N/A	2 x 1.5mm <sup>2</sup>
<b>Terminal Type</b>	Screw Terminals	Screw Down or Banana Plug	N/A	Screw Terminals
<b>Back Box Depth</b>	25mm Minimum	25mm Minimum	35mm Minimum	25mm Minimum
<b>Modular</b>	Yes			
<b>Warranty</b>	10 Years (1 Year Electronics)			
<b>Anti Microbial Certified</b>	No			
<b>IP Rating</b>	IP20			
<b>Operational Temperature</b>	-5°C to +40°C			

**Additional Information:**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.



GM2460PW

GM2465PW

GM2470PW

GM2485PW

GM2460  
MODULE BACK

GM2465  
MODULE BACK


GM2470  
MODULE BACK

GM2485  
MODULE BACK

**Telephone/Data Modules**

- GM2460BK** Telephone Socket Module (Master) - Black
- GM2460PW** Telephone Socket Module (Master) - White
- GM2465BK** Telephone Socket Module (Secondary) - Black
- GM2465PW** Telephone Socket Module (Secondary) - White
- GM2470BK** RJ11 Module - Black
- GM2470PW** RJ11 Module -White
- GM2485BK** RJ45 Cat-6 Module - Black
- GM2485PW** RJ45 Cat-6 Module - White

**Back Box Depth:** 16mm Minimum **Cable Size:** Dependent on Plate Used  
**Warranty:** 10 Years (1 Year Electronics)  
**Dimensions:** GM2460 GM2465: 24.5mm (W) x 50mm (H) x 18mm (D)  
 GM2470: 24.5mm (W) x 50mm (H) x 16mm (D)  
 GM2485: 24.5mm (W) x 50mm (H) x 17.5mm (D)

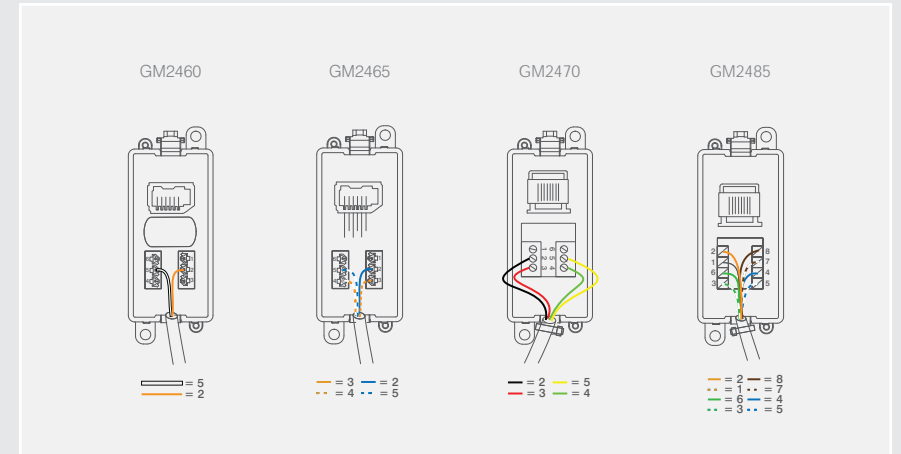

	GM2460	GM2465	GM2470	GM2485
<b>Material Composition</b>		Cover, Insert & Rear Housing: Nylon		
		Terminals: Brass		
<b>Terminal Type</b>		IDC		
<b>Back Box Depth</b>		25mm Minimum		
<b>Modular</b>		Yes		
<b>Warranty</b>		10 Years (1 Year Electronics)		
<b>Anti Microbial Certified</b>		No		
<b>IP Rating</b>		IP20		
<b>Operational Temperature</b>		-5°C to +40°C		

**Additional Information:**  
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.  
 Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.  
 All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.



GM2405PW



GM2410BK



GM2415PW



GM2405  
MODULE BACK



GM2410 / GM2415  
MODULE BACK




GM2305BK



GM2501PW

GM2405 GM2410 GM2415

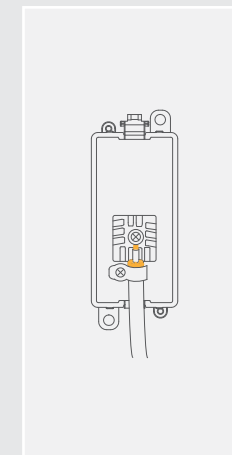

**TV/Satellite Modules**

**GM2305BK** VGA Module - Black  
**GM2305PW** VGA Module - White  
 Flylead: 160mm overall length

**GM2405BK** Satellite Module - Black  
**GM2405PW** Satellite Module - White

**GM2410BK** Non-isolated Female Coaxial Module - Black  
**GM2410PW** Non-isolated Female Coaxial Module - White

**GM2415BK** Non-isolated Male Coaxial Module - Black  
**GM2415PW** Non-isolated Male Coaxial Module - White

**GM2501BK** HDMI Module (V2.0) - Black  
**GM2501PW** HDMI Module (V2.0) - White  
 Flylead: 145mm overall length

**Back Box Depth:** Dependent on Plate Used  
**Cable Size:** 2 x 4mm<sup>2</sup>, 3 x 2.5mm<sup>2</sup> or 1 x 6mm<sup>2</sup> **Warranty:** 10 Years (1 Year Electronics)  
**Dimensions:** GM2305: 24.5mm (W) x 50mm (H) x 43mm (D)  
 GM2405 GM2410 GM2415: 24.5mm (W) x 50mm (H) x 20mm (D)  
 GM2501: 24.5mm (W) x 50mm (H) x 45mm (D)

	GM2305	GM2405	GM2410	GM2415	GM2501
<b>Material Composition</b>	Cover, Insert & Rear Housing: Nylon				
	Terminals: Brass				
	Terminal Screws: Brass				
<b>Terminal Type</b>	VGA	Screw Terminals			HDMI
<b>Version</b>	N/A	N/A	N/A	N/A	2
<b>Shielded</b>	Yes				
<b>Isolated</b>	N/A	No	No	No	N/A
<b>Modular</b>	Yes				
<b>Warranty</b>	10 Years (1 Year Electronics)				
<b>Anti Microbial Certified</b>	No				
<b>IP Rating</b>	IP20				
<b>Operational Temperature</b>	-5°C to +40°C				

**Additional Information:**  
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested have shown to have anti-viral properties against enveloped and non-enveloped viruses. A 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses and a 92% kill off rate against non-enveloped viruses.




Dimmer mounting kits include the mounting modules, locking nut, locking tool and knob. For Dimmer Modules see page 188.

**1 Module Dimmer Mounting Kit**

- GM050PW** 1 Module Dimmer Mounting Kit - White
- GM050BK** 1 Module Dimmer Mounting Kit - Black
- GM050PWBR** 1 Module Dimmer Mounting Kit - White - Polished Brass
- GM050PWBS** 1 Module Dimmer Mounting Kit - White - Brushed Stainless
- GM050PWCH** 1 Module Dimmer Mounting Kit - White - Polished Chrome
- GM050PWPN** 1 Module Dimmer Mounting Kit - White - Pearl Nickel
- GM050PWSB** 1 Module Dimmer Mounting Kit - White - Satin Brass
- GM050PWSC** 1 Module Dimmer Mounting Kit - White - Satin Chrome
- GM050PWSS** 1 Module Dimmer Mounting Kit - White - Stainless Steel
- GM050BKAB** 1 Module Dimmer Mounting Kit - Black - Antique Brass
- GM050BKBN** 1 Module Dimmer Mounting Kit - Black - Black Nickel
- GM050BKBR** 1 Module Dimmer Mounting Kit - Black - Polished Brass
- GM050BKBS** 1 Module Dimmer Mounting Kit - Black - Brushed Stainless
- GM050BKCH** 1 Module Dimmer Mounting Kit - Black - Polished Chrome
- GM050BKPN** 1 Module Dimmer Mounting Kit - Black - Pearl Nickel
- GM050BKSB** 1 Module Dimmer Mounting Kit - Black - Satin Brass
- GM050BKSC** 1 Module Dimmer Mounting Kit - Black - Satin Chrome
- GM050BKSS** 1 Module Dimmer Mounting Kit - Black - Stainless Steel
- GM050GYBS** 1 Module Dimmer Mounting Kit - Grey - Brushed Stainless
- GM050GYSC** 1 Module Dimmer Mounting Kit - Grey - Satin Chrome
- GM050GYSS** 1 Module Dimmer Mounting Kit - Grey - Stainless Steel

Standards: BS 5733  
 Back Box Depth: 47mm **Cable Size:** Dependant on Dimmer used  
 Dimensions: 24.5mm (W) x 50mm (H)

DIMENSIONS (mm)

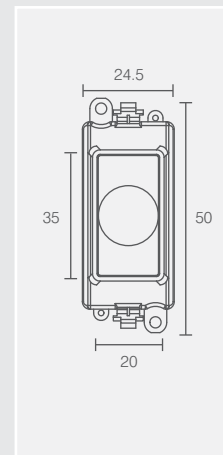

INSTALLATION



The dimmer mounting modules attach to a dimmer module via the supplied locking nut, this is achieved with the locking tool. Then the knob simply pushes into place.

<b>Material Composition</b>	Mounting Kit: Nylon
<b>Back Box Depth</b>	47mm Minimum (Deco®, Deco Plus®, Mode®, Polar®, Define®, Definity®)
<b>Modular</b>	Yes
<b>Warranty</b>	10 Years
<b>Antimicrobial Certified</b>	No
<b>IP Rating</b>	IP20
<b>Operational Temperature</b>	-5°C to +40°C
<b>Standards</b>	BS 5733

**Additional Information:**  
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.




Dimmer mounting kits include the mounting modules, locking nut, locking tool and knob. For Dimmer Modules see page 188.

**2 Module Dimmer Mounting Kit**

- GM150PW** 2 Module Dimmer Mounting Kit - White
- GM150BK** 2 Module Dimmer Mounting Kit - Black
- GM150PWBR** 2 Module Dimmer Mounting Kit - White - Polished Brass
- GM150PWBS** 2 Module Dimmer Mounting Kit - White - Brushed Stainless
- GM150PWCH** 2 Module Dimmer Mounting Kit - White - Polished Chrome
- GM150PWPN** 2 Module Dimmer Mounting Kit - White - Pearl Nickel
- GM150PWSB** 2 Module Dimmer Mounting Kit - White - Satin Brass
- GM150PWSC** 2 Module Dimmer Mounting Kit - White - Satin Chrome
- GM150PWSS** 2 Module Dimmer Mounting Kit - White - Stainless Steel
- GM150BKAB** 2 Module Dimmer Mounting Kit - Black - Antique Brass
- GM150BKBN** 2 Module Dimmer Mounting Kit - Black - Black Nickel
- GM150BKBR** 2 Module Dimmer Mounting Kit - Black - Polished Brass
- GM150BKBS** 2 Module Dimmer Mounting Kit - Black - Brushed Stainless
- GM150BKCH** 2 Module Dimmer Mounting Kit - Black - Polished Chrome
- GM150BKPN** 2 Module Dimmer Mounting Kit - Black - Pearl Nickel
- GM150BKSB** 2 Module Dimmer Mounting Kit - Black - Satin Brass
- GM150BKSC** 2 Module Dimmer Mounting Kit - Black - Satin Chrome
- GM150BKSS** 2 Module Dimmer Mounting Kit - Black - Stainless Steel
- GM150GYBS** 2 Module Dimmer Mounting Kit - Grey - Brushed Stainless
- GM150GYSC** 2 Module Dimmer Mounting Kit - Grey - Satin Chrome
- GM150GYSS** 2 Module Dimmer Mounting Kit - Grey - Stainless Steel

Standards: BS 5733  
 Back Box Depth: 47mm Cable Size: Dependant on Dimmer used  
 Dimensions: 49mm (W) x 50mm (H)

DIMENSIONS (mm)

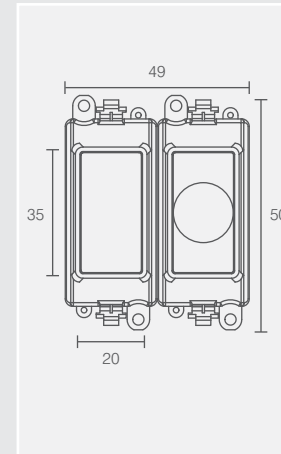

INSTALLATION



The dimmer mounting modules attach to a dimmer module via the supplied locking nut, this is achieved with the locking tool. Then the knob simply pushes into place.

Suitable for rotary dimmer modules where the spindle is off centre and overlaps the next module space. Suitable for plates with 2, 4, 8, 12, 18 or 24 apertures.

<b>Material Composition</b>	Mounting Kit: Nylon
<b>Back Box Depth</b>	47mm Minimum (Deco®, Deco Plus®, Mode®, Polar®, Define®, Definity®)
<b>Modular</b>	Yes
<b>Warranty</b>	10 Years
<b>Antimicrobial Certified</b>	No
<b>IP Rating</b>	IP20
<b>Operational Temperature</b>	-5°C to +40°C
<b>Standards</b>	BS 5733

**Additional Information:**  
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.






GM9010



MD9014

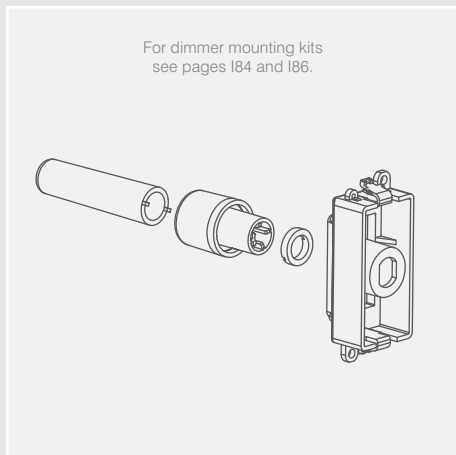

**Dimmer Modules**

- GM9001** 6A 2 Way Push On/Off (Non-Dimmable) Module
- GM9010** 1-10V Analogue Dimmer Module
- GM9022** 250W 2 Way Dimmer Module
- GM9042** 400W 2 Way Dimmer Module


The Click® dimming modules above are suitable for mounting next to each other using the appropriate mounting kit. Due to their physical size, they are not suitable to be mounted directly above each other.

**Dimmer Modules**

- MD9014** 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)

Due to the reduced height, the MD9014 is suitable for mounting directly above each other.

**Standards:** BS EN 60669-1BS EN 55015 BS EN 61000-3-2 BS EN 61000-3-3  
 9014:BS EN 60669 BS EN 55015BS EN 61000 9001: BS EN 60669-1  
**Back Box Depth:** Dependent On Plate Used **Cable Size:** 2 x 1.5mm²  
**Dimmer Type:** 9001: On & Off Only 9010: Analogue 9022 9042: Leading Edge  
 MD9014: Trailing Edge & Leading Edge

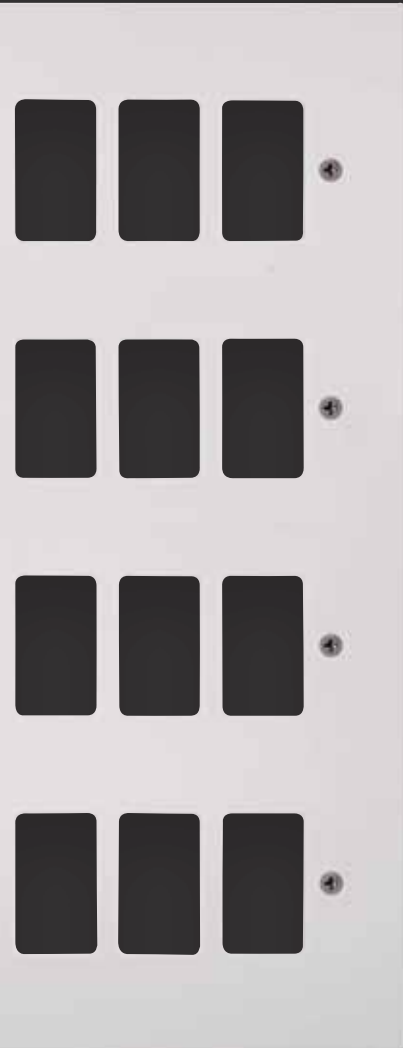

# GridPro® Frontplates

The GridPro® frontplates illustrated on the following pages are all unfurnished for easy and quick configuration with the required modules.

The new 1 - 24 gang frontplates designed for GridPro® are available from each of the existing Click® wiring accessory ranges.

These new additions to each range seamlessly match the range they belong to, including standard fixing centres allowing uniform alignment. All existing range finishes and warranties apply to the new GridPro® frontplates.

In continuing the consistency of the range for the new GridPro® frontplates, we have ensured all Mode® and Polar™ products maintain the urea material to ensure consistent aesthetics and colour matching throughout the range as well as keeping the antimicrobial properties these ranges are known for.





# Deco Plus® GridPro® Frontplates

The Deco Plus® range is a premium decorative metal range of wiring accessories, this range is available in seven finishes to complement any room.



DPAB20401



DPBR20401



DPCH20401



DPSB20402



DPSC20402



DPSS20402

Accessory can be used with standard BS4662 Back Boxes.



### Deco Plus® 1 Gang GridPro® Frontplates

- DPAB20401 1 Gang GridPro® Frontplate - Antique Brass
- DPBN20401 1 Gang GridPro® Frontplate - Black Nickel
- DPBR20401 1 Gang GridPro® Frontplate - Polished Brass
- DPCH20401 1 Gang GridPro® Frontplate - Polished Chrome
- DPSB20401 1 Gang GridPro® Frontplate - Satin Brass
- DPSC20401 1 Gang GridPro® Frontplate - Satin Chrome
- DPSS20401 1 Gang GridPro® Frontplate - Stainless Steel




### Deco Plus® 2 Gang GridPro® Frontplates

- DPAB20402 2 Gang GridPro® Frontplate - Antique Brass
- DPBN20402 2 Gang GridPro® Frontplate - Black Nickel
- DPBR20402 2 Gang GridPro® Frontplate - Polished Brass
- DPCH20402 2 Gang GridPro® Frontplate - Polished Chrome
- DPSB20402 2 Gang GridPro® Frontplate - Satin Brass
- DPSC20402 2 Gang GridPro® Frontplate - Satin Chrome
- DPSS20402 2 Gang GridPro® Frontplate - Stainless Steel


Standards: BS 5733  
Back Box Depth: 25mm Minimum  
Dimensions: 88mm (W) x 88mm (H) x 8mm (D)

### Understanding the code:


DP - Plate Style BN - Plate Finish 20401 - Product No.  
AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.

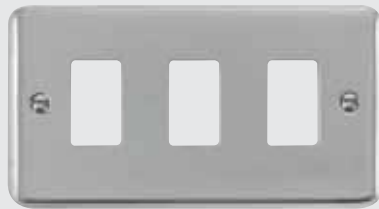


DPCH20403

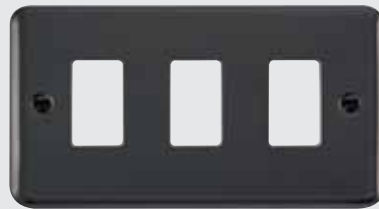

DPBN20403

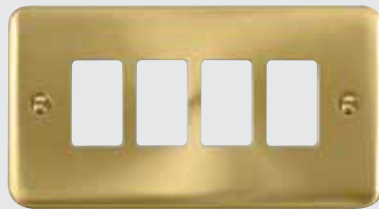

DPSB20404

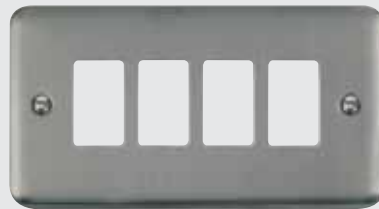

DPSS20404



Accessory can be used with standard BS4662 Back Boxes.

**Deco Plus® 3 Gang GridPro® Frontplates**

- DPAB20403 3 Gang GridPro® Frontplate - Antique Brass
- DPBN20403 3 Gang GridPro® Frontplate - Black Nickel
- DPBR20403 3 Gang GridPro® Frontplate - Polished Brass
- DPCH20403 3 Gang GridPro® Frontplate - Polished Chrome
- DPSB20403 3 Gang GridPro® Frontplate - Satin Brass
- DPSC20403 3 Gang GridPro® Frontplate - Satin Chrome
- DPSS20403 3 Gang GridPro® Frontplate - Stainless Steel



**Deco Plus® 4 Gang GridPro® Frontplates**


- DPAB20404 4 Gang GridPro® Frontplate - Antique Brass
- DPBN20404 4 Gang GridPro® Frontplate - Black Nickel
- DPBR20404 4 Gang GridPro® Frontplate - Polished Brass
- DPCH20404 4 Gang GridPro® Frontplate - Polished Chrome
- DPSB20404 4 Gang GridPro® Frontplate - Satin Brass
- DPSC20404 4 Gang GridPro® Frontplate - Satin Chrome
- DPSS20404 4 Gang GridPro® Frontplate - Stainless Steel

Standards: BS 5733  
 Back Box Depth: 25mm Minimum  
 Dimensions: 146mm (W) x 88mm (H) x 8mm (D)

Understanding the code:  
 DP - Plate Style BN - Plate Finish 20403 - Product No.  
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.



DPAB31102

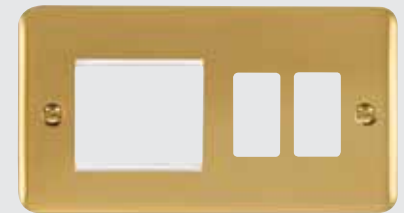

DPBR31102



DPCH31102



DPSS31102



Accessory can be used with standard BS4662 Back Boxes.

**Deco Plus® Hotel Accessory GridPro® Frontplates**


- DPAB31102 Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Antique Brass
- DPBN31102 Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Black Nickel
- DPBR31102 Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Polished Brass
- DPCH31102 Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Polished Chrome
- DPSB31102 Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Satin Brass
- DPSC31102 Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Satin Chrome
- DPSS31102 Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Stainless Steel




See our dedicated New Media™ section for more information on the range of New Media™ modules available.

Standards: BS 5733  
 Back Box Depth: Dependent On Modules Fitted  
 Dimensions: 146mm (W) x 88mm (H) x 8mm (D)

Understanding the code:  
 DP - Plate Style BN - Plate Finish 31102 - Product No.  
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.

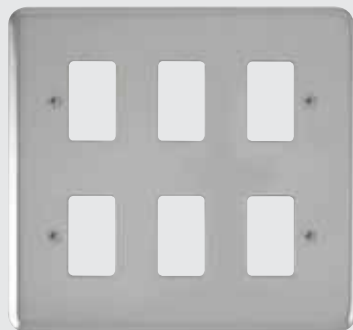

DPCH20506

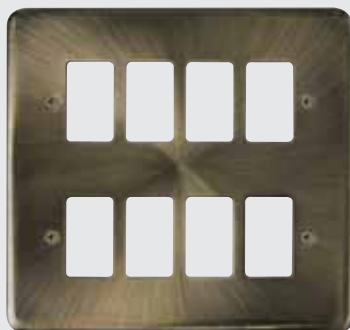

DPAB20508



Requires 2 x GR20400 Yokes.  
Compatible with Back Box WA512.  
For more information on Back Boxes and Yokes see from page I145.

**Deco Plus® 6 Gang GridPro® Frontplates**

- DPAB20506 6 Gang GridPro® Frontplate - Antique Brass
- DPBN20506 6 Gang GridPro® Frontplate - Black Nickel
- DPBR20506 6 Gang GridPro® Frontplate - Polished Brass
- DPCH20506 6 Gang GridPro® Frontplate - Polished Chrome
- DPSB20506 6 Gang GridPro® Frontplate - Satin Brass
- DPSC20506 6 Gang GridPro® Frontplate - Satin Chrome
- DPSS20506 6 Gang GridPro® Frontplate - Stainless Steel




**Deco Plus® 8 Gang GridPro® Frontplates**

- DPAB20508 8 Gang GridPro® Frontplate - Antique Brass
- DPBN20508 8 Gang GridPro® Frontplate - Black Nickel
- DPBR20508 8 Gang GridPro® Frontplate - Polished Brass
- DPCH20508 8 Gang GridPro® Frontplate - Polished Chrome
- DPSB20508 8 Gang GridPro® Frontplate - Satin Brass
- DPSC20508 8 Gang GridPro® Frontplate - Satin Chrome
- DPSS20508 8 Gang GridPro® Frontplate - Stainless Steel




Standards: BS 5733  
Back Box Depth: 47mm  
Dimensions: 148mm (W) x 148mm (H) x 8mm (D)

Understanding the code:  
DP - Plate Style BN - Plate Finish 20506 - Product No.  
AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.

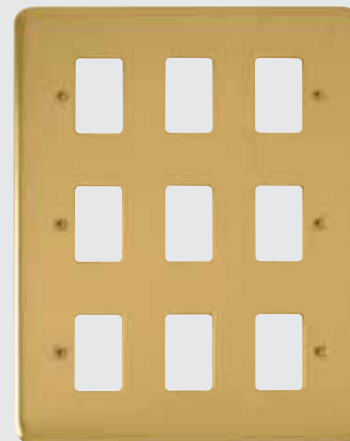

DPBR20509

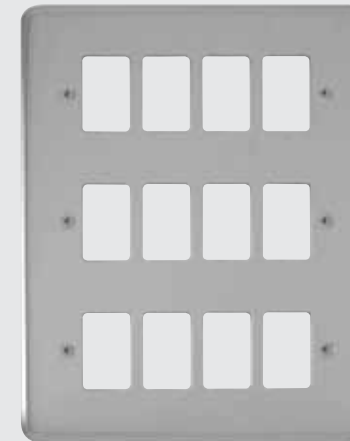

DPCH20512



Requires 3 x GR20400 Yokes.  
Compatible with Back Box WA518.  
For more information on Back Boxes and Yokes see from page I145.

**Deco Plus® 9 Gang GridPro® Frontplates**

- DPAB20509 9 Gang GridPro® Frontplate - Antique Brass
- DPBN20509 9 Gang GridPro® Frontplate - Black Nickel
- DPBR20509 9 Gang GridPro® Frontplate - Polished Brass
- DPCH20509 9 Gang GridPro® Frontplate - Polished Chrome
- DPSB20509 9 Gang GridPro® Frontplate - Satin Brass
- DPSC20509 9 Gang GridPro® Frontplate - Satin Chrome
- DPSS20509 9 Gang GridPro® Frontplate - Stainless Steel




**Deco Plus® 12 Gang GridPro® Frontplates**

- DPAB20512 12 Gang GridPro® Frontplate - Antique Brass
- DPBN20512 12 Gang GridPro® Frontplate - Black Nickel
- DPBR20512 12 Gang GridPro® Frontplate - Polished Brass
- DPCH20512 12 Gang GridPro® Frontplate - Polished Chrome
- DPSB20512 12 Gang GridPro® Frontplate - Satin Brass
- DPSC20512 12 Gang GridPro® Frontplate - Satin Chrome
- DPSS20512 12 Gang GridPro® Frontplate - Stainless Steel



Standards: BS 5733  
Back Box Depth: 47mm  
Dimensions: 148mm (W) x 207mm (H) x 8mm (D)

Understanding the code:  
DP - Plate Style BN - Plate Finish 20509 - Product No.  
AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.

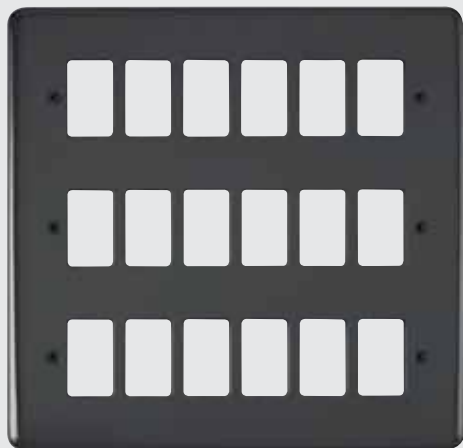

DPBN20518

Requires 3 x GR20600 Yokes.  
Compatible with Back Box WA20518.  
For more information on Back Boxes and Yokes see from page I145.




**Deco Plus® 18 Gang GridPro® Frontplates**

- DPAB20518** 18 Gang GridPro® Frontplate - Antique Brass
- DPBN20518** 18 Gang GridPro® Frontplate - Black Nickel
- DPBR20518** 18 Gang GridPro® Frontplate - Polished Brass
- DPCH20518** 18 Gang GridPro® Frontplate - Polished Chrome
- DPSB20518** 18 Gang GridPro® Frontplate - Satin Brass
- DPSC20518** 18 Gang GridPro® Frontplate - Satin Chrome
- DPSS20518** 18 Gang GridPro® Frontplate - Stainless Steel



Standards: BS 5733  
Back Box Depth: 56mm  
Dimensions: 198mm (W) x 207mm (H) x 8mm (D)

Understanding the code:  
DP - Plate Style BN - Plate Finish 20518 - Product No.  
AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.

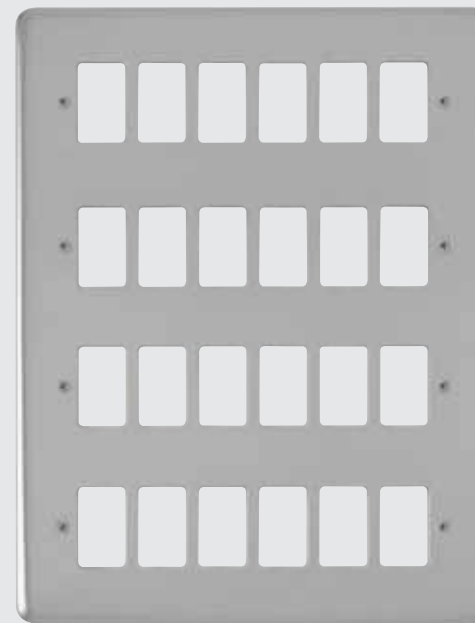

DPCH20524

Requires 4 x GR20600 Yokes.  
Compatible with Back Box WA20524.  
For more information on Back Boxes and Yokes see from page I145.



**Deco Plus® 24 Gang GridPro® Frontplates**

- DPAB20524** 24 Gang GridPro® Frontplate - Antique Brass
- DPBN20524** 24 Gang GridPro® Frontplate - Black Nickel
- DPBR20524** 24 Gang GridPro® Frontplate - Polished Brass
- DPCH20524** 24 Gang GridPro® Frontplate - Polished Chrome
- DPSB20524** 24 Gang GridPro® Frontplate - Satin Brass
- DPSC20524** 24 Gang GridPro® Frontplate - Satin Chrome
- DPSS20524** 24 Gang GridPro® Frontplate - Stainless Steel



Standards:  
Back Box Depth: 56mm  
Dimensions: 198mm (W) x 268mm (H) x 8mm (D)

Understanding the code:  
DP - Plate Style BN - Plate Finish 20518 - Product No.  
AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.

# Definity™ GridPro® Frontplates

## The Screwless Range

Screwless, push-fit frontplates in 6 assorted finishes, the ultimate finishing touch.

The frontplates are supplied independently of the inserts which means that the initial installation of the product can be carried out and any subsequent decoration or maintenance completed before the final selection and fixing of the frontplate.



definity™







# Definity™ Assembly

GRIDPRO®

definity™



1. Fit and secure appropriate back box and insert, pull cable through insert and strip insulation accordingly. Ensure an earth connection between frame and insert (if required).

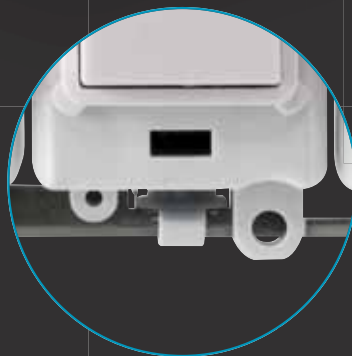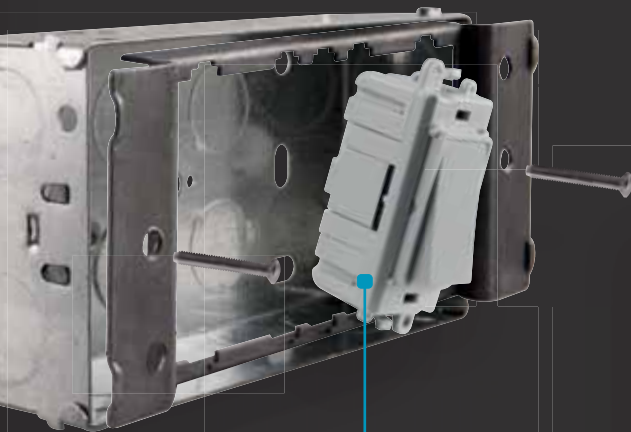

2. Systematically terminate cables into each module. Clip the modules into a designated Definity™ insert with a pivot motion.

3. Clip the Definity™ GridPro® frontplate directly to insert.



SCP20401CH



SCP20401BK

**definity™**

The Definity™ GridPro® frontplates on this page require the designated 1 and 2 module insert shown below.

SIN20200



SCP20402BS



SCP20402SS



SCP20403PW

**definity™**

The Definity™ GridPro® frontplates on this page require the designated 3 and 4 module insert shown below.

SIN20400



SCP20404CH

**definity™**

Requires designated insert.  
Accessory can be used with standard BS4662 Back Boxes.

**definity™**

**Definity™ 1 Gang GridPro® Frontplates**

- SCP20401BK 1 Gang GridPro® Frontplate - Black
- SCP20401BS 1 Gang GridPro® Frontplate - Brushed Stainless
- SCP20401CH 1 Gang GridPro® Frontplate - Polished Chrome
- SCP20401PW 1 Gang GridPro® Frontplate - White
- SCP20401SS 1 Gang GridPro® Frontplate - Stainless Steel
- SCP20401MW 1 Gang GridPro® Frontplate - Metal White



**Definity™ 2 Gang GridPro® Frontplates**

- SCP20402BK 2 Gang GridPro® Frontplate - Black
- SCP20402BS 2 Gang GridPro® Frontplate - Brushed Stainless
- SCP20402CH 2 Gang GridPro® Frontplate - Polished Chrome
- SCP20402PW 2 Gang GridPro® Frontplate - White
- SCP20402SS 2 Gang GridPro® Frontplate - Stainless Steel
- SCP20402MW 2 Gang GridPro® Frontplate - Metal White



**Definity™ Module Insert**

- SIN20200 1 & 2 GridPro® Module Insert

Standards: BS 5733  
Back Box Depth: Dependant on module used  
Dimensions: 86mm (W) x 86mm (H) x 4mm (D) 20200: 82mm (W) x 60mm (H) x 8mm (D)

Understanding the code:  
SCP - Plate Style 20401 - Product No. CH - Plate Finish  
CH Polished Chrome BS Brushed Stainless SS Stainless Steel BK Matt Black PW White MW Metal White

Requires designated insert.

Accessory can be used with standard BS4662 Back Boxes.

**Definity™ 3 Gang GridPro® Frontplates**

- SCP20403BK 3 Gang GridPro® Frontplate - Black
- SCP20403BS 3 Gang GridPro® Frontplate - Brushed Stainless
- SCP20403CH 3 Gang GridPro® Frontplate - Polished Chrome
- SCP20403PW 3 Gang GridPro® Frontplate - White
- SCP20403SS 3 Gang GridPro® Frontplate - Stainless Steel
- SCP20403MW 3 Gang GridPro® Frontplate - Metal White



**Definity™ 4 Gang GridPro® Frontplates**

- SCP20404BK 4 Gang GridPro® Frontplate - Black
- SCP20404BS 4 Gang GridPro® Frontplate - Brushed Stainless
- SCP20404CH 4 Gang GridPro® Frontplate - Polished Chrome
- SCP20404PW 4 Gang GridPro® Frontplate - White
- SCP20404SS 4 Gang GridPro® Frontplate - Stainless Steel
- SCP20404MW 4 Gang GridPro® Frontplate - Metal White



**Definity™ Module Insert**

- SIN20400 3 & 4 GridPro® Module Insert

Standards: BS 5733  
Back Box Depth: Dependant on module used  
Dimensions: 146mm (W) x 86mm (H) x 4mm (D)

Understanding the code:  
SCP - Plate Style 20403 - Product No. CH - Plate Finish  
CH Polished Chrome BS Brushed Stainless SS Stainless Steel BK Matt Black PW White MW Metal White



SCP31102BS



SCP31102PW

**definity™**

The Definity™ GridPro® frontplates on this page require the designated Hotel Accessory module insert shown below.

SIN31102

Requires designated insert.  
Accessory can be used with standard BS4662 Back Boxes.



**Definity™ Hotel Accessory GridPro® Frontplates**

- SCP31102BK** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Cover Plate - Matt Black
- SCP31102BS** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Cover Plate - Brushed Stainless
- SCP31102CH** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Cover Plate - Polished Chrome
- SCP31102PW** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Cover Plate - White
- SCP31102SS** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Cover Plate - Stainless Steel
- SCP31102MW** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Cover Plate - Metal White



**Definity™ Hotel Accessory GridPro® Insert**


- SIN31102BK** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture Insert




See our dedicated New Media™ section for more information on the range of modules available.

**Standards:** BS 5733  
**Back Box Depth:** Dependent On Modules Fitted  
**Dimensions:** 146mm (W) x 86mm (H) x 4mm (D)

**Understanding the code:**  
SCP - Plate Style 31102 - Product No. CH - Plate Finish  
CH Polished Chrome BS Brushed Stainless SS Stainless Steel BK Matt Black PW White MW Metal White

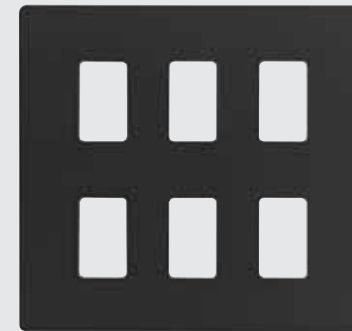

SCP20506BK

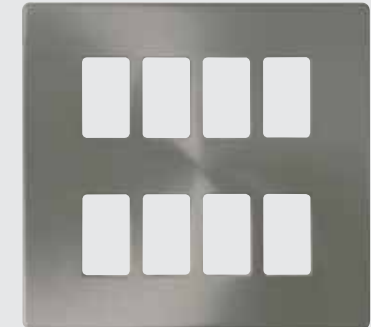

SCP20508BS

**definity™**

The Definity™ GridPro® frontplates on this page require the designated 3 and 4 module insert shown here.

SIN20400



Requires designated insert.  
Compatible with Back Box WA512.  
For more information on Back Boxes see from page 1145.

**Definity™ 6 Gang GridPro® Frontplates**

- SCP20506BK** 6 Gang GridPro® Frontplate - Black
- SCP20506BS** 6 Gang GridPro® Frontplate - Brushed Stainless
- SCP20506CH** 6 Gang GridPro® Frontplate - Polished Chrome
- SCP20506PW** 6 Gang GridPro® Frontplate - White
- SCP20506SS** 6 Gang GridPro® Frontplate - Stainless Steel
- SCP20506MW** 6 Gang GridPro® Frontplate - Metal White



**Definity™ 8 Gang GridPro® Frontplates**

- SCP20508BK** 8 Gang GridPro® Frontplate - Black
- SCP20508BS** 8 Gang GridPro® Frontplate - Brushed Stainless
- SCP20508CH** 8 Gang GridPro® Frontplate - Polished Chrome
- SCP20508PW** 8 Gang GridPro® Frontplate - White
- SCP20508SS** 8 Gang GridPro® Frontplate - Stainless Steel
- SCP20508MW** 8 Gang GridPro® Frontplate - Metal White

**Definity™ Module Insert**

- SIN20400** 3 & 4 GridPro® Module Insert

**Standards:** BS 5733  
**Back Box Depth:** 47mm Minimum  
**Dimensions:** 146mm (W) x 146mm (H) x 4mm (D) 20400: 142mm (W) x 60mm (H) x 8mm (D)

**Understanding the code:**  
SCP - Plate Style 20401 - Product No. CH - Plate Finish  
CH Polished Chrome BS Brushed Stainless SS Stainless Steel BK Matt Black PW White MW Metal White



## Define® GridPro® Frontplates

### The Decorative Flat Plate Range

The Define® flat plate range of accessories offers up a host of new design opportunities with a comprehensive range of electrical accessory products available in 5 different decorative plate finishes.


**define®**

# Fully Adjustable Assembly

GRIDPRO®

essentials™ define®

1. Fit and secure appropriate back box and yoke with tabs removed. Pull the cable through yoke and strip insulation accordingly. Ensure an earth connection between frame and yoke (if required). The fixing screws are backed off to allow adjustment for yoke.

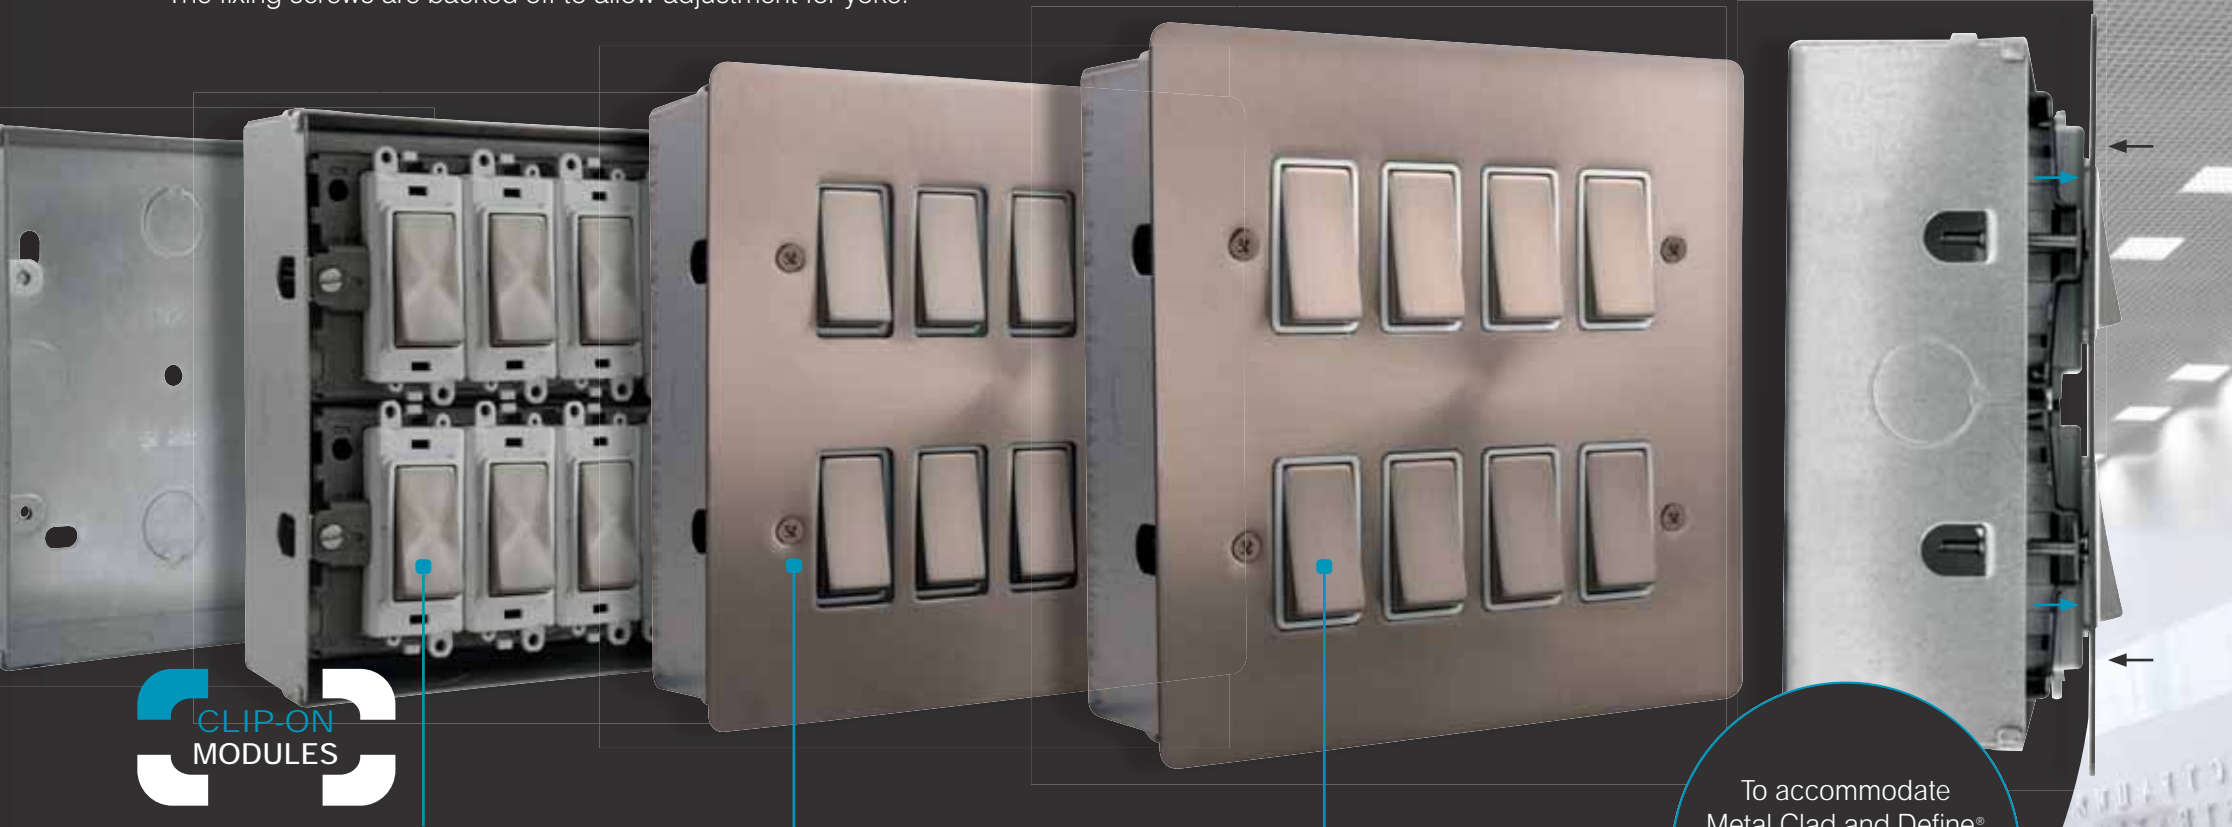

2. Systematically terminate cables into each module. Clip modules into yoke with a pivot motion.

3. Attach the frontplate using the fixing screws provided. The yokes containing the modules sit behind the frontplate until the captive fixing screws tighten up and pull them forward into place.

4. The position of the frontplate in relation to the wall can be adjusted by the captive fixing screws. If the back box is not recessed level with the wall then the yoke will adjust so that the frontplate mounts flush to the wall.





FPBN20401



FPCH20401



FPPN20401



FPBS20402



FPSS20402



FPPN20402



FPBN20403



FPCH20403



FPPN20404



FPSS20404

**define®**

Accessory can be used with standard BS4662 Back Boxes.

**Define® 1 Gang GridPro® Frontplates**

- FPBN20401** 1 Gang GridPro® Frontplate - Black Nickel
- FPBS20401** 1 Gang GridPro® Frontplate - Brushed Stainless
- FPCH20401** 1 Gang GridPro® Frontplate - Polished Chrome
- FPPN20401** 1 Gang GridPro® Frontplate - Pearl Nickel
- FPSS20401** 1 Gang GridPro® Frontplate - Stainless Steel



**Define® 2 Gang GridPro® Frontplates**

- FPBN20402** 2 Gang GridPro® Frontplate - Black Nickel
- FPBS20402** 2 Gang GridPro® Frontplate - Brushed Stainless
- FPCH20402** 2 Gang GridPro® Frontplate - Polished Chrome
- FPPN20402** 2 Gang GridPro® Frontplate - Pearl Nickel
- FPSS20402** 2 Gang GridPro® Frontplate - Stainless Steel



Standards: BS 5733  
 Back Box Depth: 35mm Minimum  
 Dimensions: 86mm (W) x 86mm (H) x 1.3mm (D)

Understanding the code:  
 FP - Plate Style BN - Plate Finish 20401 - Product No.  
 CH Polished Chrome, BN Black Nickel, PN Pearl Nickel, BS Brushed Stainless, SS Stainless Steel.

Accessory can be used with standard BS4662 Back Boxes.

**define®**

**Define® 3 Gang GridPro® Frontplates**

- FPBN20403** 3 Gang GridPro® Frontplate - Black Nickel
- FPBS20403** 3 Gang GridPro® Frontplate - Brushed Stainless
- FPCH20403** 3 Gang GridPro® Frontplate - Polished Chrome
- FPPN20403** 3 Gang GridPro® Frontplate - Pearl Nickel
- FPSS20403** 3 Gang GridPro® Frontplate - Stainless Steel



**Define® 4 Gang GridPro® Frontplates**

- FPBN20404** 4 Gang GridPro® Frontplate - Black Nickel
- FPBS20404** 4 Gang GridPro® Frontplate - Brushed Stainless
- FPCH20404** 4 Gang GridPro® Frontplate - Polished Chrome
- FPPN20404** 4 Gang GridPro® Frontplate - Pearl Nickel
- FPSS20404** 4 Gang GridPro® Frontplate - Stainless Steel



Standards: BS 5733  
 Back Box Depth: 35mm Minimum  
 Dimensions: 146mm (W) x 88mm (H) x 1.3mm (D)

Understanding the code:  
 FP - Plate Style BN - Plate Finish 20404 - Product No.  
 CH Polished Chrome, BN Black Nickel, PN Pearl Nickel, BS Brushed Stainless, SS Stainless Steel.






FPCH31102



FPBN31102



FPBS31102

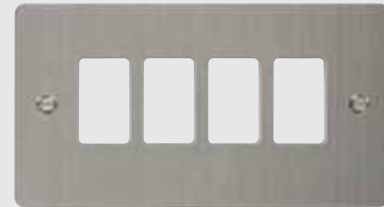

FPSS31102

**define®**

Accessory can be used with standard BS4662 Back Boxes.

**Define® Hotel Accessory GridPro® Frontplates**


- FPBN31102** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Black Nickel
- FPBS31102** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Brushed Stainless
- FPCH31102** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Polished Chrome
- FPPN31102** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Pearl Nickel
- FPSS31102** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Stainless Steel




See our dedicated New Media™ section for more information on the range of New Media™ modules available.

Standards: BS 5733  
 Back Box Depth: Dependent On Modules Fitted  
 Dimensions: 146mm (W) x 88mm (H) x 1.3mm (D)

Understanding the code:  
 FP - Plate Style BN - Plate Finish 31102 - Product No.  
 CH Polished Chrome, BN Black Nickel, PN Pearl Nickel, BS Brushed Stainless, SS Stainless Steel.

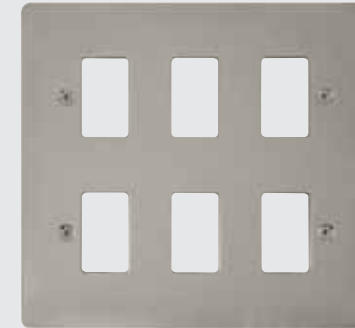

FPPN20506

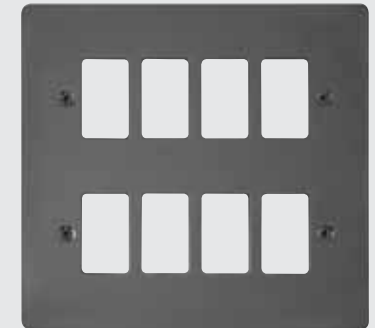

FPBN20508

Requires 2 x GR20400 Yokes.  
 Compatible with Back Box WA512.  
 For more information on Back Boxes and Yokes see from page I145.

**define®**

**Define® 6 Gang GridPro® Frontplates**

- FPBN20506** 6 Gang GridPro® Frontplate - Black Nickel
- FPBS20506** 6 Gang GridPro® Frontplate - Brushed Stainless
- FPCH20506** 6 Gang GridPro® Frontplate - Polished Chrome
- FPPN20506** 6 Gang GridPro® Frontplate - Pearl Nickel
- FPSS20506** 6 Gang GridPro® Frontplate - Stainless Steel


**Define® 8 Gang GridPro® Frontplates**

- FPBN20508** 8 Gang GridPro® Frontplate - Black Nickel
- FPBS20508** 8 Gang GridPro® Frontplate - Brushed Stainless
- FPCH20508** 8 Gang GridPro® Frontplate - Polished Chrome
- FPPN20508** 8 Gang GridPro® Frontplate - Pearl Nickel
- FPSS20508** 8 Gang GridPro® Frontplate - Stainless Steel




Standards: BS 5733  
 Back Box Depth: 47mm  
 Dimensions: 148mm (W) x 148mm (H) x 1.3mm (D)


Understanding the code:  
 FP - Plate Style BN - Plate Finish 20404 - Product No.  
 CH Polished Chrome, BN Black Nickel, PN Pearl Nickel, BS Brushed Stainless, SS Stainless Steel.

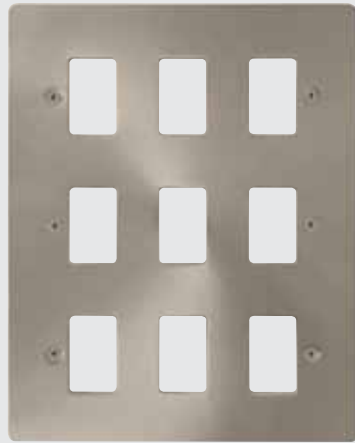

FPBS20509

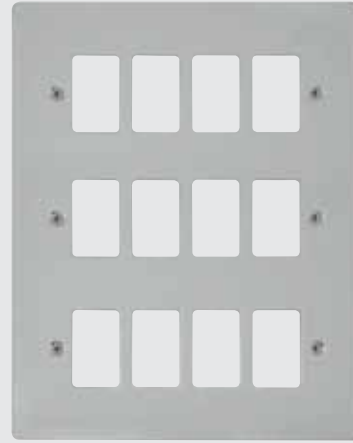

FPCH20512

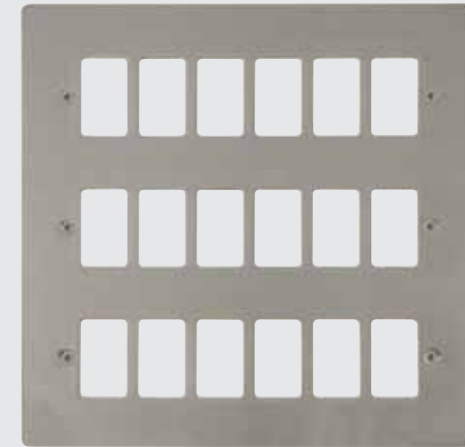

FPPN20518

**define®**

Requires 3 x GR20400 Yokes.  
Compatible with Back Box WA518.  
For more information on Back Boxes and Yokes see from page I145.

**Define® 9 Gang GridPro® Frontplates**

- FPBN20509** 9 Gang GridPro® Frontplate - Black Nickel
- FPBS20509** 9 Gang GridPro® Frontplate - Brushed Stainless
- FPCH20509** 9 Gang GridPro® Frontplate - Polished Chrome
- FPPN20509** 9 Gang GridPro® Frontplate - Pearl Nickel
- FPSS20509** 9 Gang GridPro® Frontplate - Stainless Steel

**Define® 12 Gang GridPro® Frontplates**

- FPBN20512** 12 Gang GridPro® Frontplate - Black Nickel
- FPBS20512** 12 Gang GridPro® Frontplate - Brushed Stainless
- FPCH20512** 12 Gang GridPro® Frontplate - Polished Chrome
- FPPN20512** 12 Gang GridPro® Frontplate - Pearl Nickel
- FPSS20512** 12 Gang GridPro® Frontplate - Stainless Steel



Standards: BS 5733  
Back Box Depth: 47mm  
Dimensions: 148mm (W) x 207mm (H) x 1.3mm (D)

Understanding the code:  
FP - Plate Style BN - Plate Finish 20509 - Product No.  
CH Polished Chrome, BN Black Nickel, PN Pearl Nickel, BS Brushed Stainless, SS Stainless Steel.

**define®**

Requires 3 x GR20600 Yokes.  
Compatible with Back Box WA20518.  
For more information on Back Boxes and Yokes see from page I145.


**Define® 18 Gang GridPro® Frontplates**

- FPBN20518** 18 Gang GridPro® Frontplate - Black Nickel
- FPBS20518** 18 Gang GridPro® Frontplate - Brushed Stainless
- FPCH20518** 18 Gang GridPro® Frontplate - Polished Chrome
- FPPN20518** 18 Gang GridPro® Frontplate - Pearl Nickel
- FPSS20518** 18 Gang GridPro® Frontplate - Stainless Steel



Standards: BS 5733  
Back Box Depth: 56mm  
Dimensions: 198mm (W) x 207mm (H) x 1.3mm (D)

Understanding the code:  
FP - Plate Style BN - Plate Finish 20518 - Product No.  
CH Polished Chrome, BN Black Nickel, PN Pearl Nickel, BS Brushed Stainless, SS Stainless Steel.

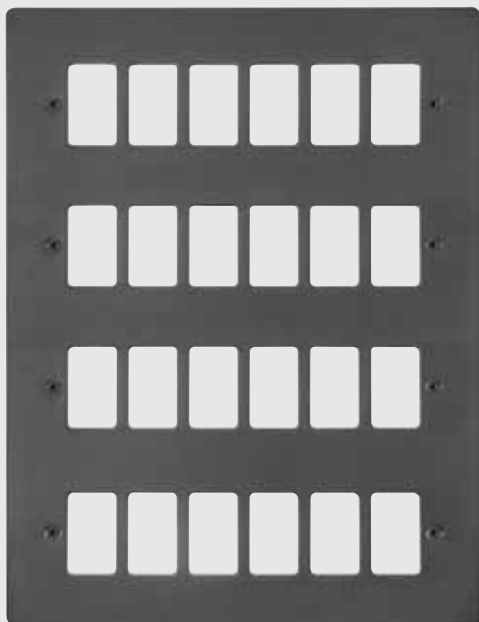

FPBN20524

**define®**

Requires 4 x GR20600 Yokes.  
Compatible with Back Box WA20524.  
For more information on Back Boxes and Yokes see from page 1145.

**Define® 24 Gang GridPro® Frontplates**

- FPBN20524** 24 Gang GridPro® Frontplate - Black Nickel
- FPBS20524** 24 Gang GridPro® Frontplate - Brushed Stainless
- FPCH20524** 24 Gang GridPro® Frontplate - Polished Chrome
- FPPN20524** 24 Gang GridPro® Frontplate - Pearl Nickel
- FPSS20524** 24 Gang GridPro® Frontplate - Stainless Steel



Standards: BS 5733  
Back Box Depth: 56mm  
Dimensions: 198mm (W) x 268mm (H) x 1.3mm (D)

Understanding the code:  
FP - Plate Style **BN** - Plate Finish **20518** - Product No.  
CH Polished Chrome, **BN** Black Nickel, **PN** Pearl Nickel, **BS** Brushed Stainless, **SS** Stainless Steel.

# Deco® GridPro® Frontplates

Decorative Metal Wiring Accessories.

Available in 8 finishes, a brand that is synonymous with high quality, long life, high specification and unprecedented value for money.





VPCH20401



VPSB20401



VPSS20401




VPPN20402



VPSC20402



VPBN20402

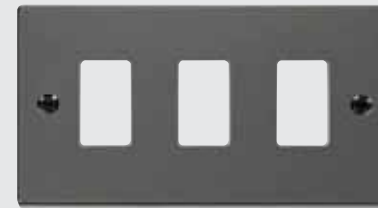

VPBN20403



VPBR20403



VPCH20404



VPAB20404



Accessory can be used with standard BS4662 Back Boxes.

**Deco® 1 Gang GridPro® Frontplates**

- VPAB20401 1 Gang GridPro® Frontplate - Antique Brass
- VPBN20401 1 Gang GridPro® Frontplate - Black Nickel
- VPBR20401 1 Gang GridPro® Frontplate - Polished Brass
- VPCH20401 1 Gang GridPro® Frontplate - Polished Chrome
- VPPN20401 1 Gang GridPro® Frontplate - Pearl Nickel
- VPSB20401 1 Gang GridPro® Frontplate - Satin Brass
- VPSC20401 1 Gang GridPro® Frontplate - Satin Chrome
- VPSS20401 1 Gang GridPro® Frontplate - Stainless Steel



**Deco® 2 Gang GridPro® Frontplates**

- VPAB20402 2 Gang GridPro® Frontplate - Antique Brass
- VPBN20402 2 Gang GridPro® Frontplate - Black Nickel
- VPBR20402 2 Gang GridPro® Frontplate - Polished Brass
- VPCH20402 2 Gang GridPro® Frontplate - Polished Chrome
- VPPN20402 2 Gang GridPro® Frontplate - Pearl Nickel
- VPSB20402 2 Gang GridPro® Frontplate - Satin Brass
- VPSC20402 2 Gang GridPro® Frontplate - Satin Chrome
- VPSS20402 2 Gang GridPro® Frontplate - Stainless Steel

Standards: BS 5733  
 Back Box Depth: 25mm Minimum  
 Dimensions: 88mm (W) x 88mm (H) x 8mm (D)

Understanding the code:  
 VP - Plate Style BN - Plate Finish 20401 - Product No.  
 CH Polished Chrome, SC Satin Chrome, BR Polished Brass, BN Black Nickel, PN Pearl Nickel,  
 AB Antique Brass, SB Satin Brass, SS Stainless Steel.



Accessory can be used with standard BS4662 Back Boxes.

**Deco® 3 Gang GridPro® Frontplates**

- VPAB20403 3 Gang GridPro® Frontplate - Antique Brass
- VPBN20403 3 Gang GridPro® Frontplate - Black Nickel
- VPBR20403 3 Gang GridPro® Frontplate - Polished Brass
- VPCH20403 3 Gang GridPro® Frontplate - Polished Chrome
- VPPN20403 3 Gang GridPro® Frontplate - Pearl Nickel
- VPSB20403 3 Gang GridPro® Frontplate - Satin Brass
- VPSC20403 3 Gang GridPro® Frontplate - Satin Chrome
- VPSS20403 3 Gang GridPro® Frontplate - Stainless Steel



**Deco® 4 Gang GridPro® Frontplates**

- VPAB20404 4 Gang GridPro® Frontplate - Antique Brass
- VPBN20404 4 Gang GridPro® Frontplate - Black Nickel
- VPBR20404 4 Gang GridPro® Frontplate - Polished Brass
- VPCH20404 4 Gang GridPro® Frontplate - Polished Chrome
- VPPN20404 4 Gang GridPro® Frontplate - Pearl Nickel
- VPSB20404 4 Gang GridPro® Frontplate - Satin Brass
- VPSC20404 4 Gang GridPro® Frontplate - Satin Chrome
- VPSS20404 4 Gang GridPro® Frontplate - Stainless Steel

Standards: BS 5733  
 Back Box Depth: 25mm Minimum  
 Dimensions: 146mm (W) x 88mm (H) x 8mm (D)

Understanding the code:  
 VP - Plate Style BN - Plate Finish 20403 - Product No.  
 CH Polished Chrome, SC Satin Chrome, BR Polished Brass, BN Black Nickel, PN Pearl Nickel,  
 AB Antique Brass, SB Satin Brass, SS Stainless Steel.



GCBR31102



VPSC31102



VPPN31102



VPAB31102



Accessory can be used with standard BS4662 Back Boxes.

**Deco® Hotel Accessory GridPro® Frontplates**

- VPAB31102** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Antique Brass
- VPBN31102** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Black Nickel
- VPBR31102** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Polished Brass
- VPCH31102** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Polished Chrome
- VPPN31102** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Pearl Nickel
- VPSB31102** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Satin Brass
- VPSC31102** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Satin Chrome
- VPSS31102** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture - Stainless Steel




See our dedicated New Media™ section for more information on the range of New Media™ modules available.

Standards: BS 5733  
 Back Box Depth: Dependent On Modules Fitted  
 Dimensions: 146mm (W) x 88mm (H) x 8mm (D)

**Understanding the code:**  
 VP - Plate Style BN - Plate Finish 31102 - Product No.  
 CH Polished Chrome, SC Satin Chrome, BR Polished Brass, BN Black Nickel, PN Pearl Nickel,  
 AB Antique Brass, SB Satin Brass, SS Stainless Steel.



VPPN20506



VPSC20508



Requires 2 x GR20400 Yokes.  
 Compatible with Back Box WA512.  
 For more information on Back Boxes and Yokes see from page I145.

**Deco® 6 Gang GridPro® Frontplates**

- VPAB20506** 6 Gang GridPro® Frontplate - Antique Brass
- VPBN20506** 6 Gang GridPro® Frontplate - Black Nickel
- VPBR20506** 6 Gang GridPro® Frontplate - Polished Brass
- VPCH20506** 6 Gang GridPro® Frontplate - Polished Chrome
- VPPN20506** 6 Gang GridPro® Frontplate - Pearl Nickel
- VPSB20506** 6 Gang GridPro® Frontplate - Satin Brass
- VPSC20506** 6 Gang GridPro® Frontplate - Satin Chrome
- VPSS20506** 6 Gang GridPro® Frontplate - Stainless Steel




**Deco® 8 Gang GridPro® Frontplates**

- VPAB20508** 8 Gang GridPro® Frontplate - Antique Brass
- VPBN20508** 8 Gang GridPro® Frontplate - Black Nickel
- VPBR20508** 8 Gang GridPro® Frontplate - Polished Brass
- VPCH20508** 8 Gang GridPro® Frontplate - Polished Chrome
- VPPN20508** 8 Gang GridPro® Frontplate - Pearl Nickel
- VPSB20508** 8 Gang GridPro® Frontplate - Satin Brass
- VPSC20508** 8 Gang GridPro® Frontplate - Satin Chrome
- VPSS20508** 8 Gang GridPro® Frontplate - Stainless Steel




Standards: BS 5733  
 Back Box Depth: 47mm  
 Dimensions: 146mm (W) x 146mm (H) x 8mm (D)


**Understanding the code:**  
 VP - Plate Style BN - Plate Finish 20506 - Product No.  
 CH Polished Chrome, SC Satin Chrome, BR Polished Brass, BN Black Nickel, PN Pearl Nickel,  
 AB Antique Brass, SB Satin Brass, SS Stainless Steel.

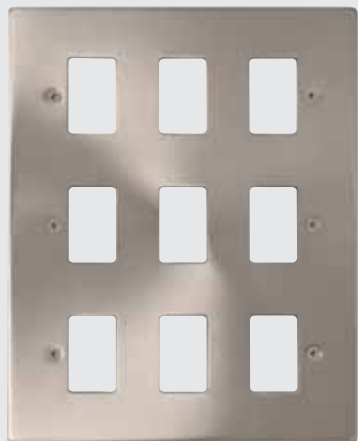

VPSC20509

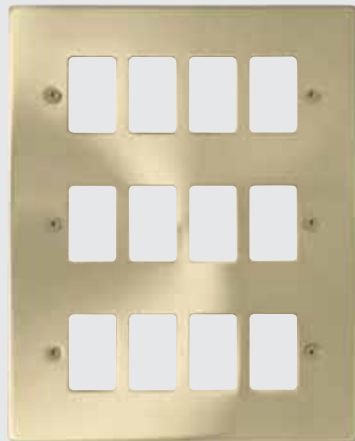

VPSB20512

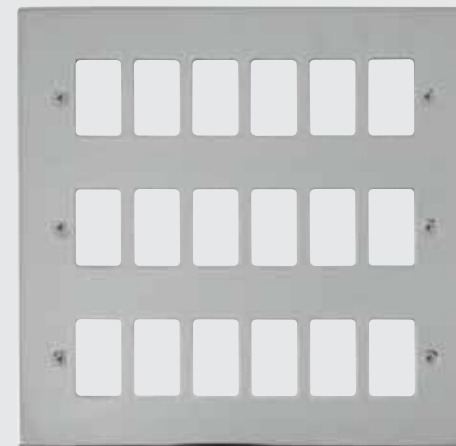

VPCH20518



Requires 3 x GR20400 Yokes.  
Compatible with Back Box WA518.  
For more information on Back Boxes and Yokes see from page I145.



**Deco® 9 Gang GridPro® Frontplates**

- VPAB20509 9 Gang GridPro® Frontplate - Antique Brass
- VPBN20509 9 Gang GridPro® Frontplate - Black Nickel
- VPBR20509 9 Gang GridPro® Frontplate - Polished Brass
- VPCH20509 9 Gang GridPro® Frontplate - Polished Chrome
- VPPN20509 9 Gang GridPro® Frontplate - Pearl Nickel
- VPSB20509 9 Gang GridPro® Frontplate - Satin Brass
- VPSC20509 9 Gang GridPro® Frontplate - Satin Chrome
- VPSS20509 9 Gang GridPro® Frontplate - Stainless Steel



**Deco® 12 Gang GridPro® Frontplates**

- VPAB20512 12 Gang GridPro® Frontplate - Antique Brass
- VPBN20512 12 Gang GridPro® Frontplate - Black Nickel
- VPBR20512 12 Gang GridPro® Frontplate - Polished Brass
- VPCH20512 12 Gang GridPro® Frontplate - Polished Chrome
- VPPN20512 12 Gang GridPro® Frontplate - Pearl Nickel
- VPSB20512 12 Gang GridPro® Frontplate - Satin Brass
- VPSC20512 12 Gang GridPro® Frontplate - Satin Chrome
- VPSS20512 12 Gang GridPro® Frontplate - Stainless Steel



Standards: BS 5733  
Back Box Depth: 47mm  
Dimensions: 146mm (W) x 206mm (H) x 8mm (D)

Understanding the code:  
VP - Plate Style BN - Plate Finish 20509 - Product No.  
CH Polished Chrome, SC Satin Chrome, BR Polished Brass, BN Black Nickel, PN Pearl Nickel,  
AB Antique Brass, SB Satin Brass, SS Stainless Steel.

Requires 3 x GR20600 Yokes.  
Compatible with Back Box WA20518.  
For more information on Back Boxes and Yokes see from page I145.

**Deco® 18 Gang GridPro® Frontplates**


- VPAB20518 18 Gang GridPro® Frontplate - Antique Brass
- VPBN20518 18 Gang GridPro® Frontplate - Black Nickel
- VPBR20518 18 Gang GridPro® Frontplate - Polished Brass
- VPCH20518 18 Gang GridPro® Frontplate - Polished Chrome
- VPPN20518 18 Gang GridPro® Frontplate - Pearl Nickel
- VPSB20518 18 Gang GridPro® Frontplate - Satin Brass
- VPSC20518 18 Gang GridPro® Frontplate - Satin Chrome
- VPSS20518 18 Gang GridPro® Frontplate - Stainless Steel



Standards: BS 5733  
Back Box Depth: 56mm  
Dimensions: 196mm (W) x 207mm (H) x 8mm (D)

Understanding the code:  
VP - Plate Style BN - Plate Finish 20506 - Product No.  
CH Polished Chrome, SC Satin Chrome, BR Polished Brass, BN Black Nickel, PN Pearl Nickel,  
AB Antique Brass, SB Satin Brass, SS Stainless Steel.



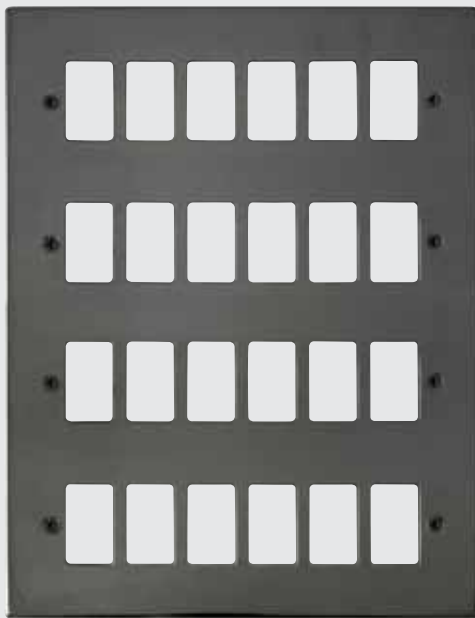

VPBN20524



Requires 4 x GR20600 Yokes.  
Compatible with Back Box WA20524.  
For more information on Back Boxes and Yokes see from page I145.

**Deco® 24 Gang GridPro® Frontplates**

- VPAB20524 24 Gang GridPro® Frontplate - Antique Brass
- VPBN20524 24 Gang GridPro® Frontplate - Black Nickel
- VPBR20524 24 Gang GridPro® Frontplate - Polished Brass
- VPCH20524 24 Gang GridPro® Frontplate - Polished Chrome
- VPPN20524 24 Gang GridPro® Frontplate - Pearl Nickel
- VPSB20524 24 Gang GridPro® Frontplate - Satin Brass
- VPSC20524 24 Gang GridPro® Frontplate - Satin Chrome
- VPSS20524 24 Gang GridPro® Frontplate - Stainless Steel



Standards: BS 5733  
Back Box Depth: 56mm  
Dimensions: 196mm (W) x 268mm (H) x 8mm (D)

Understanding the code:  
VP - Plate Style BN - Plate Finish 20509 - Product No.  
CH Polished Chrome, SC Satin Chrome, BR Polished Brass, BN Black Nickel, PN Pearl Nickel,  
AB Antique Brass, SB Satin Brass, SS Stainless Steel.



# Mode® GridPro® Frontplates

A stylish, contemporary and flexible range of smooth profile wiring accessories

Mode® accessories have been designed and developed as a high quality, flexible and modern solution to virtually any domestic or commercial wiring requirement.

Mode® accessories have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses. After a contact period of 4 hours, Mode® was shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.

Mode® wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.



CMA20401



CMA20403



CMA20404



CMA31102

**MODE®**

Antiviral & Antibacterial certified products.  
Accessory can be used with standard BS4662 Back Boxes.  
Compatible with standard Click® surface mounted boxes.

**Mode® 1 Gang GridPro® Frontplates**

**CMA20401** 1 Gang GridPro® Frontplate

**Mode® 2 Gang GridPro® Frontplates**

**CMA20402** 2 Gang GridPro® Frontplate

**Mode® 3 Gang GridPro® Frontplates**

**CMA20403** 3 Gang GridPro® Frontplate

**Mode® 4 Gang GridPro® Frontplates**

**CMA20404** 4 Gang GridPro® Frontplate

**Mode® Hotel Accessory GridPro® Frontplates**

**CMA31102** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate  
With Twin New Media Aperture - White



See our dedicated New Media™ section for more information on the range of New Media™ modules available.



Standards: BS 5733  
Back Box Depth: 25mm Minimum **31102**: Dependent On Modules Fitted  
Dimensions: **1 Gang**: 86mm (W) x 86mm (H) x 9mm (D), **2 Gang**: 146mm (W) x 86mm (H) x 9mm (D)



CMA20506



CMA20508

**MODE®**

Antiviral & Antibacterial certified products.  
Requires 2 x GR20400 Yokes. Compatible with Back Box WA512.  
For more information on Back Boxes and Yokes see from page I145.

**Mode® 6 Gang GridPro® Frontplates**

**CMA20506** 6 Gang GridPro® Frontplate

**Mode® 8 Gang GridPro® Frontplates**

**CMA20508** 8 Gang GridPro® Frontplate - Mode



Standards: BS 5733  
Back Box Depth: 47mm  
Dimensions: 146mm (W) x 146mm (H) x 9mm (D)



CMA20509



CMA20512



CMA20518

**MODE®**

Antiviral & Antibacterial certified products.  
Requires 3 x GR20400 Yokes. Compatible with Back Box WA518.  
For more information on Back Boxes and Yokes see from page I145.

**Mode® 9 Gang GridPro® Frontplates**

**CMA20509** 9 Gang GridPro® Frontplate - Mode

**Mode® 12 Gang GridPro® Frontplates**

**CMA20512** 12 Gang GridPro® Frontplate



Standards: BS 5733  
Back Box Depth: 47mm  
Dimensions: 146mm (W) x 206mm (H) x 9mm (D)

**MODE®**

Antiviral & Antibacterial certified products.  
Compatible with Back Box WA20518.  
For more information on Back Boxes and Yokes see from page I145.

**Mode® 18 Gang GridPro® Frontplates**

**CMA20518** 18 Gang GridPro® Frontplate

Requires 3 x GR20600 Yokes.



Standards: BS 5733  
Back Box Depth: 56mm  
Dimensions: 196mm (W) x 206mm (H) x 9mm (D)



CMA20524

**MODE**

Antiviral & Antibacterial certified products.  
Compatible with Back Box WA20524.

For more information on Back Boxes and Yokes see from page I145.

**Mode® 24 Gang GridPro® Frontplates**

**CMA20524** 24 Gang GridPro® Frontplate

Requires 4 x GR20600 Yokes.



Standards: BS 5733  
Back Box Depth: 56mm  
Dimensions: 196mm (W) x 266mm (H) x 9mm (D)



# Part M™ GridPro® Frontplates

## Visually Contrasting Wiring Accessories

Part M™ wiring accessories have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses. After a contact period of 4 hours, Part M™ was shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.

Part M™ wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.

### Part M Range™



CMA20401AG



CMA20402AG



CMA20403AG



CMA20404AG

**Part M Range™**

Antiviral & Antibacterial certified products.  
Accessory can be used with standard BS4662 Back Boxes.  
Compatible with standard Click® surface mounted boxes.

**Mode Part M™ 1 Gang GridPro® Frontplates**

**CMA20401AG** 1 Gang GridPro® Frontplate

**Mode Part M™ 2 Gang GridPro® Frontplates**

**CMA20402AG** 2 Gang GridPro® Frontplate

**Mode Part M™ 3 Gang GridPro® Frontplates**

**CMA20403AG** 3 Gang GridPro® Frontplate

**Mode Part M™ 4 Gang GridPro® Frontplates**

**CMA20404AG** 4 Gang GridPro® Frontplate



Standards: BS 5733  
Back Box Depth: 25mm Minimum  
Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 9mm (D) 2 Gang: 146mm (W) x 86mm (H) x 9mm (D)



# Polar™ GridPro® Frontplates

A premium range of bright white accessories

So confident are we of the durability and reliability of the Polar™ product that we guarantee these products against any fault in materials or manufacture for at least 20 years.

Polar™ plates have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses. After a contact period of 4 hours, Polar™ was shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.

Polar™ wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.





PRW20402



PRW20403



PRW20404



PRW31102



Antiviral & Antibacterial certified products.  
Accessory can be used with standard BS4662 Back Boxes.  
Compatible with standard Click® surface mounted boxes.

**Polar™ 1 Gang GridPro® Frontplates**

**PRW20401** 1 Gang GridPro® Frontplate

**Polar™ 2 Gang GridPro® Frontplates**

**PRW20402** 2 Gang GridPro® Frontplate

**Polar™ 3 Gang GridPro® Frontplates**

**PRW20403** 3 Gang GridPro® Frontplate

**Polar™ 4 Gang GridPro® Frontplates**

**PRW20404** 4 Gang GridPro® Frontplate

**Polar™ Hotel Accessory GridPro® Frontplates**

**PRW31102** Hotel Accessory Plate - 2 Gang Gridpro® Frontplate  
With Twin New Media Aperture - White



See our dedicated New Media™ section for more information on the range of New Media™ modules available.

Standards: BS 5733  
Back Box Depth: 25mm Minimum **31102**: Dependent On Modules Fitted  
Dimensions: **1 Gang**: 86mm (W) x 86mm (H) x 9mm (D) **2 Gang**: 146mm (W) x 88mm (H) x 9mm (D)  
**31102**: 146mm (W) x 86mm (H) x 11mm (D)



PRW20506



PRW20508



Antiviral & Antibacterial certified products.  
Requires 2 x GR20400 Yokes. Compatible with Back Box WA512.  
For more information on Back Boxes and Yokes see from page I145.

**Polar™ 6 Gang GridPro® Frontplates**

**PRW20506** 6 Gang GridPro® Frontplate

**Polar™ 8 Gang GridPro® Frontplates**

**PRW20508** 8 Gang GridPro® Frontplate - Polar



Standards: BS 5733  
Back Box Depth: 47mm  
Dimensions: 146mm (W) x 146mm (H) x 9mm (D)






PRW20509



PRW20512

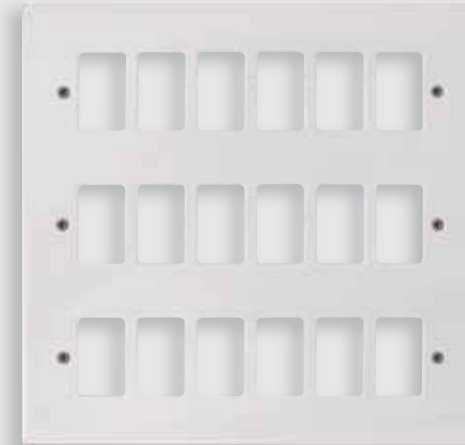

PRW20518



Antiviral & Antibacterial certified products.  
Requires 3 x GR20400 Yokes. Compatible with Back Box WA518.  
For more information on Back Boxes and Yokes see from page I145.

**Polar™ 9 Gang GridPro® Frontplates**

**PRW20509** 9 Gang GridPro® Frontplate - Polar

**Polar™ 12 Gang GridPro® Frontplates**

**PRW20512** 12 Gang GridPro® Frontplate



Standards: BS 5733  
Back Box Depth: 47mm  
Dimensions: 146mm (W) x 206mm (H) x 9mm (D)



Antiviral & Antibacterial certified products.  
Compatible with Back Box WA20518.  
For more information on Back Boxes and Yokes see from page I145.


**Polar™ 18 Gang GridPro® Frontplates**

**PRW20518** 18 Gang GridPro® Frontplate

Requires 3 x GR20600 Yokes.



Standards: BS 5733  
Back Box Depth: 56mm  
Dimensions: 196mm (W) x 206mm (H) x 9mm (D)

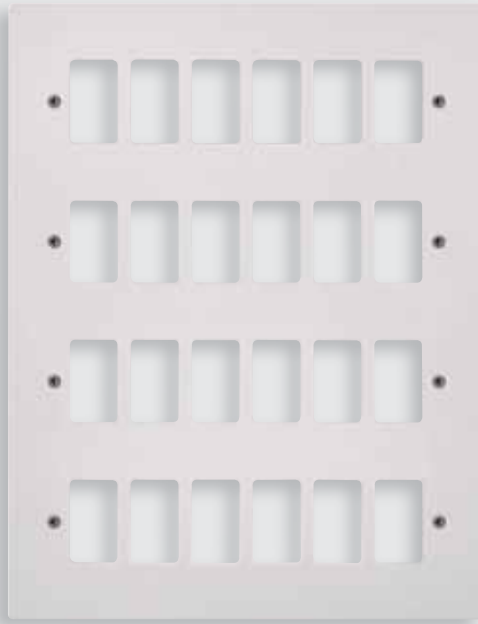

PRW20524



# Metal Clad GridPro® Frontplates

A comprehensive selection of metal clad electrical accessory products are featured in the following pages. Electrophoretically coated plates and back boxes provide a durable and long lasting heavy duty finish to this attractive range of products.

essentials™



Antiviral & Antibacterial certified products.  
Compatible with Back Box WA20524.

For more information on Back Boxes and Yokes see from page I145.

**Polar™ 24 Gang GridPro® Frontplates**

**PRW20524** 24 Gang GridPro® Frontplate

Requires 4 x GR20600 Yokes.



Standards: BS 5733  
Back Box Depth: 56mm  
Dimensions: 196mm (W) x 266mm (H) x 9mm (D)



CL20401



CL20402



CL31102



CL20404B

essentials™

Supplied complete with 40mm deep Back Boxes.

**Metal Clad GridPro® Frontplates with Back Box**

- CL20401 1 Gang GridPro® Frontplate & Back Box
- CL20402 2 Gang GridPro® Frontplate & Back Box
- CL20403 3 Gang GridPro® Frontplate & Back Box
- CL20404 4 Gang GridPro® Frontplate & Back Box

**Metal Clad GridPro® Frontplates with Back Box no Knockouts**

- CL20401B 1 Gang GridPro® Frontplate & Back Box (No Knockouts)
- CL20402B 2 Gang GridPro® Frontplate & Back Box (No Knockouts)
- CL20403B 3 Gang GridPro® Frontplate & Back Box (No Knockouts)
- CL20404B 4 Gang GridPro® Frontplate & Back Box (No Knockouts)

**Metal Clad Hotel Accessory GridPro® Frontplates**

- CL31102 Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture With Back Box - Metal Clad
- CL31102B Hotel Accessory Plate - 2 Gang Gridpro® Frontplate With Twin New Media Aperture With Back Box (No Knockouts) - Metal Clad



Standards: BS 5733 **Back Box Depth:** 40mm (Supplied)  
**Dimensions:** 1 Gang: 80mm (W) x 80mm (H) x 42mm (D) 2 Gang: 140mm (W) x 80mm (H) x 42mm (D)  
**Knockouts:** 1&2 Gang: 5 x 20mm 3&4 Gang: 7 x 20mm



CL20506



CL20508B

Requires 2 x GR20400 Yokes. See page I145.  
 Supplied complete with 40mm deep Back Boxes.

essentials™

**Metal Clad 6 Gang GridPro® Frontplates with Back Box**

- CL20506 6 Gang GridPro® Frontplate & Back Box

**Metal Clad 6 Gang GridPro® Frontplates with Back Box (No Knockouts)**

- CL20506B 6 Gang GridPro® Frontplate & Back Box (No Knockouts)

**Metal Clad 8 Gang GridPro® Frontplates with Back Box**

- CL20508 8 Gang GridPro® Frontplate & Back Box

**Metal Clad 8 Gang GridPro® Frontplates with Back Box (No Knockouts)**

- CL20508B 8 Gang GridPro® Frontplate & Back Box (No Knockouts)



50mm deep back box is required when installing the dimmer mounting kits.  
 For 50mm deep Back Boxes and Yokes see page M24.

Standards: BS 5733  
**Back Box Depth:** 40mm (Supplied)  
**Dimensions:** 146mm (W) x 146mm (H) x 42mm (D) **Knockouts:** 4 x 20mm, 4 x 25mm (Include 32mm x 67mm rear entry panel)



CL20509



CL20512B



CL20518B

essentials™

Requires 3 x GR20400 Yokes. See page I145.  
Supplied complete with 40mm deep Back Boxes.

**Metal Clad 9 Gang GridPro® Frontplates with Back Box**

**CL20509** 9 Gang GridPro® Frontplate & Back Box

**Metal Clad 9 Gang GridPro® Frontplates with Back Box (No Knockouts)**

**CL20509B** 9 Gang GridPro® Frontplate & Back Box (No Knockouts)

**Metal Clad 12 Gang GridPro® Frontplates with Back Box**

**CL20512** 12 Gang GridPro® Frontplate & Back Box

**Metal Clad 12 Gang GridPro® Frontplates with Back Box (No Knockouts)**

**CL20512B** 12 Gang GridPro® Frontplate & Back Box (No Knockouts)

50mm deep back box is required when installing the dimmer mounting kits.

For 50mm deep Back Boxes and Yokes see page M24.



Standards: BS 5733  
Back Box Depth: 40mm (Supplied)  
Dimensions: 146mm (W) x 207mm (H) x 42mm (D) **Knockouts:** 5 x 20mm, 5 x 25mm (include 32mm x 67mm rear entry panel)

essentials™

Requires 3 x GR20600 Yokes. See page I145.  
Supplied complete with 56mm deep Back Boxes.

**Metal Clad 18 Gang GridPro® Frontplates with Back Box**

**CL20518** 18 Gang GridPro® Frontplate & Back Box

**Metal Clad 18 Gang GridPro® Frontplates with Back Box (No Knockouts)**

**CL20518B** 18 Gang GridPro® Frontplate & Back Box (No Knockouts)



Standards: BS 5733  
Back Box Depth: 56mm (Supplied)  
Dimensions: 196mm (W) x 206mm (H) x 58mm (D) **Knockouts:** 3 x 20mm, 9 x 25mm (include 50mm x 102mm rear entry panel)



CL20524

essentials™

Requires 4 x GR20600 Yokes. See page I145.  
Supplied complete with 56mm deep Back Boxes.

**Metal Clad 24 Gang GridPro® Frontplates with Back Box**

**CL20524** 24 Gang GridPro® Frontplate & Back Box

**Metal Clad 24 Gang GridPro® Frontplates with Back Box (No Knockouts)**

**CL20524B** 24 Gang GridPro® Frontplate & Back Box (No Knockouts)



Standards: BS 5733  
Back Box Depth: 56mm (Supplied)  
Dimensions: 196mm (W) x 268mm (H) x 58mm (D) Knockouts: 6 x 20mm, 6 x 25mm (include 50mm x 102mm rear entry panel)

# Yokes & Back Boxes

Our universal yokes may be used for any Click® GridPro® frontplate styles\* including Define® and Metal Clad variants.

\*excluding the screwless Definity™ plates, which have their own dedicated inserts.

For the larger 6 - 24 gang GridPro® frontplates we have a selection of compatible back boxes.



GR20400



GR20600

essentials™

**GridPro® Universal Yokes**

**GR20400** GridPro® 3 & 4 Module Universal Yoke  
**GR20600** GridPro® 6 Module Universal Yoke

Standards: BS 5733  
Dimensions: 20400: 143mm (W) x 60mm (H) x 8mm (D) 20600: 190mm (W) x 60mm (H) x 8mm (D)



WA512



WA518



WA20518



WA20524

WA512  
for use with 6 & 8  
Gang GridPro®  
Frontplates.



WA518  
for use with 9 & 12  
Gang GridPro®  
Frontplates.



WA20518  
for use with 18  
Gang GridPro®  
Frontplates.



WA20524  
for use with 24  
Gang GridPro®  
Frontplates.



essentials™

Galvanised Steel Back Boxes

- WA512 2 Tier 47mm Deep K.O. Box
- WA518 3 Tier 47mm Deep K.O. Box

Standards: BS 4662  
Back Box Depth: 47mm  
Dimensions: WA512: 137mm (W) x 137mm (H) x 47mm (D) WA518: 137mm (W) x 197mm (H) x 47mm (D)  
Knockouts: WA512: 7 x 20mmØ, 3 x 25mmØ knockouts WA518: 8 x 20mmØ, 4 x 25mmØ knockouts

essentials™

GridPro® Flush Mounted Back Boxes

- WA20518 18 Gang GridPro® Flush Mounted Back Box - 56mm Deep
- WA20524 24 Gang GridPro® Flush Mounted Back Box - 56mm Deep

Standards: BS 5733  
Back Box Depth: 56mm  
Dimensions: WA20518: 185mm (W) x 197mm (H) x 56mm (D) WA20524: 185mm (W) x 255mm (H) x 56mm (D)  
Knockouts: WA20518: 10 x 20mm, 6 x 25mm WA20524: 10 x 20mm, 6 x 25mm



I148

GRIDPRO®

Notes section containing 18 horizontal grey bars for writing.