



Minigrid® Plates  
& Modules



**MINIGRID®**

Interchangeable Plates & Modules

## Contents

### Minigrig® Plates

Unfurnished Plates	J5
Yokes & Back Boxes	J7
Deco Plus® Unfurnished Plates	J9
Deco® Unfurnished Plates	J10
Define® Unfurnished Plates	J11
Definity™ Unfurnished Plates	J12
Mode® & Part M™ Unfurnished Plates	J13
Polar™ Unfurnished Plates	J14
Metal Clad Unfurnished Plates	J15
Red Unfurnished Plates	J16

### Minigrig® Modules

1 & 2 Way Switch Modules	J18
Intermediate Switch Module	J19
2 Way Paddle Switch Module	J20
2 Way Retractive Switch Module	J21
DP Switch Module	J22
2 Way Key switch Module	J23
DP Key switch 'Emergency Test' Module	J24
DP Key switch Module	J25
Blank Module	J26
Fused Connection Module	J27
Flex Outlet Module	J28
1 Way Retractive 'Bell' Switch Module	J29
3 Position Switch Modules	J30
Fan Isolation Switch Module	J32
2 Way Switch Module	J33
20A DP Switch Modules	J34
Dimmer Module Mounting Kit	J36
2 Way Toggle Switch Modules	J38

This section serves to introduce the extended range of Click® Minigrig® mounting plates and modules. All of these new items are comprehensively illustrated throughout the following pages.


Since the launch of the moulded Click® and Polar™ accessory ranges the modular switch arrangement standard in both products has proved to be a highly valued facility amongst designers and installers alike.

Simple, single screw installation of the modules on the mounting plates has encouraged contractors to devise and install customised switching solutions on-site.


The fully interchangeable Minigrig® modules are fitted as standard into our moulded Polar™, Mode® & Part M™, decorative Define®, Deco®, Deco Plus® & Definity™ and Metal Clad ranges.

# Minigrid® Plates

The Minigrid® plates illustrated on the following pages are all unfurnished for easy and quick configuration with required modules.

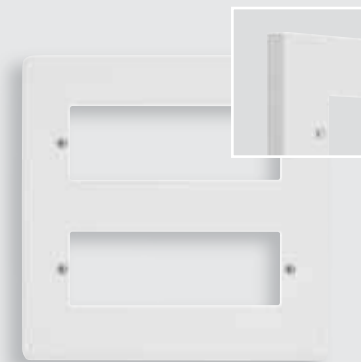


PRW612

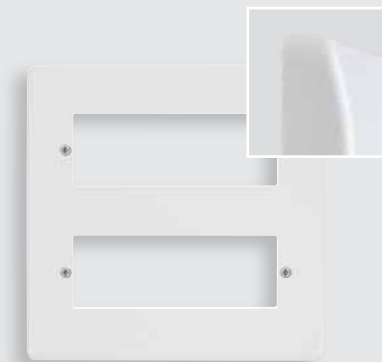

CMA612



CL512



VPAG512

If dimmer modules are to be mounted directly above each other, the MD9014 (page J37) or similar height dimmer modules must be installed. Alternatively, retractable switch modules MD004 (page J21) can be used in conjunction with Click Smart+ dimming receivers (page A18).

## 2 Tier Unfurnished Plates - MiniGrid®

**PRW612** 2 Tier MiniGrid® Unfurnished Plate & Yokes

- 12 Apertures - Polar™

**CMA612** 2 Tier MiniGrid® Unfurnished Plate & Yokes

- 12 Apertures - Mode®

**VPAG512** 2 Tier MiniGrid® Unfurnished Plate

c/w Gaskets - 12 Apertures - Part M™

**CL512** 2 Tier MiniGrid® Unfurnished Plate -

12 Apertures - Metal Clad

612: GR101 yokes supplied complete with the frontplate

2 x GR100PW Yokes required, see page J7.  
When using dimmer mounting kit, 50mm deep back box required, see page M24.




**Antiviral Certified:** Polar™ Mode® and Part M™ plates have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses. After a contact period of 4 hours, Polar™ Mode® and Part M™ was shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.

**Antibacterial Certified:** Polar™ Mode® and Part M™ wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.


Standards: BS 5733

Back Box Depth: 47mm CL512:40mm Supplied

Dimensions: CMA612: 146mm (W) x 153mm (H) x 9.5mm (D) VPAG512: 146mm (W) x 146mm (H) x 8mm (D)  
PRW612: 146mm (W) x 153mm (H) x 9.5mm (D) CL512: 148mm (W) x 148mm (H) x 42mm (D)



PRW618



CMA618



CL518



VPAG518

If dimmer modules are to be mounted directly above each other, the MD9014 (page J37) or similar height dimmer modules must be installed. Alternatively, retractive switch modules MD004 (page J21) can be used in conjunction with Click Smart+ dimming receivers (page A18).

**3 Tier Unfurnished Plates - MiniGrid®**

**PRW618** 3 Tier MiniGrid® Unfurnished Plate & Yokes - 18 Apertures - Polar™

**CMA618** 3 Tier MiniGrid® Unfurnished Plate & Yokes - 18 Apertures - Mode®

618: GR101 yokes supplied complete with the frontplate

**VPAG518** 3 Tier MiniGrid® Unfurnished Plate c/w Gaskets - 18 Apertures - Part M™

**CL518** 3 Tier MiniGrid® Unfurnished Plate - 18 Apertures - Metal Clad

3 x GR100 Yokes required, see page J7  
When using dimmer mounting kit, 50mm deep back box required, see page M24




**Antiviral Certified:** Polar™ Mode® and Part M™ plates have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses. After a contact period of 4 hours, Polar™ Mode® and Part M™ was shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.

**Antibacterial Certified:** Polar™ Mode® and Part M™ wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.

Standards: BS 5733  
Back Box Depth: 47mm CL518: 40mm Supplied  
Dimensions: CMA618: 146mm (W) x 214mm (H) x 9.5mm (D) PRW518: 146mm (W) x 214mm (H) x 9.5mm (D)  
CL518: 148mm (W) x 207mm (H) x 42mm (D) VPAG518: 146mm (W) x 227mm (H) x 8mm (D)



Example of yoke furnished with modules



GR100



WA512



WA518

Galvanised steel back boxes supplied for flush mounting of the large MiniGrid® plates. Mounting Yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.

**Yokes**

**GR100BK** MiniGrid® Module Yoke - 6 Apertures - Black

**GR100PW** MiniGrid® Module Yoke - 6 Apertures - White

**GR100GY** MiniGrid® Module Yoke - 6 Apertures - Grey

**Galvanised Steel Back Boxes**

**WA512** 2 Tier 47mm Deep K.O. Box

**WA518** 3 Tier 47mm Deep K.O. Box

2 or 3 yokes are required based on the backbox selected.

Yokes & recommended ranges:  
Black & Grey - Deco® & Deco Plus®  
Polar White - Part M™ & Metal Clad

Standards: 512 518: BS 4662  
Dimensions: 512: 137mm (W) x 137mm (H) x 47mm (D)  
518: 137mm (W) x 197mm (H) x 47mm (D)  
100: 129mm (W) x 55mm (H) x 14mm (D)



DPBN518



DPCH512



VPAB512



MINIGRID®

The furnished Deco® plate shown here contains five double width modules and eight single width modules.

If dimmer modules are to be mounted directly above each other, the MD9014 (page J37) or similar height dimmer modules must be installed. Alternatively, retractive switch modules MD004 (page J21) can be used in conjunction with Click Smart+ dimming receivers (page A18).

**Deco Plus® Unfurnished Plates c/w Gaskets - Minigrig®**

- DP\*\*512 2 Tier MiniGrid® Unfurnished Plate - 12 Apertures 2 x GR100 Yokes required, see page C9
- DP\*\*518 3 Tier MiniGrid® Unfurnished Plate - 18 Apertures 3 x GR100 Yokes required, see page C9

**Deco® Unfurnished Plates c/w Gaskets - Minigrig®**

- VP\*\*512 2 Tier MiniGrid® Unfurnished Plate - 12 Apertures 2 x GR100 Yokes required, see page C9
- VP\*\*518 3 Tier MiniGrid® Unfurnished Plate - 18 Apertures 3 x GR100 Yokes required, see page C9

Standards: BS 5733  
 Back Box Depth: 47mm  
 Dimensions: 512: 146mm (W) x 146mm (H) x 8mm (D) 518: 146mm (W) x 227mm (H) x 8mm (D)

Deco® Plates are available in: AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, SS Stainless Steel, BN Black Nickel, PN Pearl Nickel Please add 2 letter prefix to identify required finish i.e. VPCH311 for Chrome.

Deco Plus® Plates are available in: AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, SS Stainless Steel, BN Black Nickel Please add 2 letter prefix to identify required finish i.e. DPBN036 for Black Nickel.



401



402



471



472




403



404



406

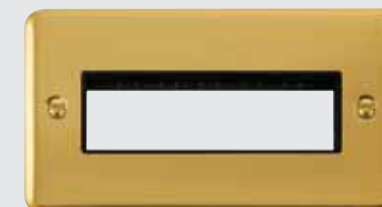

426

For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page J18.



**Unfurnished Plates - MiniGrid®**

- DP\*\*401 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
- DP\*\*402 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
- DP\*\*403 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
- DP\*\*404 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
- DP\*\*406 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
- DP\*\*426 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures

**Architrave Unfurnished Plates - MiniGrid®**

- DP\*\*471 1 Gang MiniGrid® Unfurnished Architrave Plate - 1 Aperture
- DP\*\*472 2 Gang MiniGrid® Unfurnished Architrave Plate - 2 Apertures

These plates must be used with the architrave back boxes WA671 / WA672 and can only be flush mounted.

Standards: BS 5733  
 Back Box Depth: Dependent On Modules Fitted 471:16mm Minimum 472: 25mm Minimum  
 Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)  
 471: 35mm (W) x 88mm (H) x 8mm (D) 472: 35mm (W) x 150mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black inserts. SC & SS Ingot are available with Grey Inserts  
 DP - Plate Style BN - Plate Finish 036 - Product No. BK - Insert Colour  
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel.



See page C31 for back boxes.

**Unfurnished Plates - MiniGrid®**

- VP\*\*401 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
- VP\*\*402 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
- VP\*\*403 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
- VP\*\*404 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
- VP\*\*406 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
- VP\*\*426 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures
- VP\*\*432 2 Gang MiniGrid® Unfurnished Plate - 3 Apertures

**Architrave Unfurnished Plates - MiniGrid®**

- VP\*\*471 1 Gang MiniGrid® Unfurnished Architrave Plate - 1 Aperture
  - VP\*\*472 2 Gang MiniGrid® Unfurnished Architrave Plate - 2 Apertures
- These plates must be used with the dedicated architrave back boxes WA571/WA572 and can only be flush mounted. See page C31

Please note 432 is not available in BN, BR, PN, SB or GCBR. See range of MiniGrid® Modules in the MiniGrid® section

Standards: BS 5733

Back Box Depth: Dependent On Modules Fitted 471: 16mm Minimum 472: 25mm Minimum

Dimensions: 1 Gang: 88mm (W) x 88mm (H) x 8mm (D) 2 Gang: 146mm (W) x 88mm (H) x 8mm (D)  
471: 35mm (W) x 89mm (H) x 8mm (D) 472: 35mm (W) x 149mm (H) x 8mm (D)

Understanding the code: Please note: AB & BN are only available with Black Inserts. SC & SS Ingot are available with Grey Inserts  
VP - Plate Style BN - Plate Finish 011 - Product No.  
AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style



Define® plates are coated stainless steel.



**Unfurnished Plates - MiniGrid®**

- FP\*\*401 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
- FP\*\*402 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
- FP\*\*403 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
- FP\*\*404 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
- FP\*\*406 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
- FP\*\*426 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures

Standards: BS 5733

Back Box Depth: Dependent On Modules Fitted

Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 1.3mm (D) 2 Gang: 146mm (W) x 88mm (H) x 1.3mm (D)

Understanding the code:  
FP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour  
BS Brushed Stainless, BN Black Nickel, PN Pearl Nickel, CH Polished Chrome and SS Stainless Steel



SIN401 | SCP401



SIN402 | SCP402



SIN403 | SCP403



SIN406 | SCP406



SIN426 | SCP426

**definity™**

**Unfurnished Plate Inserts**

- SIN401 1 Gang MiniGrid® Unfurnished Plate Insert - 1 Aperture
- SIN402 1 Gang MiniGrid® Unfurnished Plate Insert - 2 Apertures
- SIN403 1 Gang MiniGrid® Unfurnished Plate Insert - 3 Apertures
- SIN404 2 Gang MiniGrid® Unfurnished Plate Insert - 2 x 2 Apertures
- SIN406 2 Gang MiniGrid® Unfurnished Plate Insert - 2 x 3 Apertures
- SIN426 2 Gang MiniGrid® Unfurnished Plate Insert - 6 In-Line Apertures

**Unfurnished Plate Cover Plates**

- SCP401 1 Gang MiniGrid® Cover Plate - 1 Aperture
- SCP402 1 Gang MiniGrid® Cover Plate - 2 Apertures
- SCP403 1 Gang MiniGrid® Cover Plate - 3 Apertures
- SCP404 2 Gang MiniGrid® Cover Plate - 2 x 2 Apertures
- SCP406 2 Gang MiniGrid® Cover Plate - 2 x 3 Apertures
- SCP426 2 Gang MiniGrid® Cover Plate - 6 In-Line Apertures

Standards: BS 5733

Back Box Depth: Dependent On Modules Fitted

Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 4mm (D) 2 Gang: 146mm (W) x 86mm (H) x 4mm (D)

Understanding the code:

SIN - Insert Prefix 036 - Product No. BK - Insert Colour SS - 'INGOT' Switch Finish (if applicable)

SCP - Definity Cover Plate Prefix 436 - Product No SS - Plate Colour.

BS Brushed Stainless, CH Polished Chrome, SS Stainless Steel, MW Metal White, PW White, BK Black



CMA401AG



CMA402AG



CMA403AG



CMA426



CMA406

CMA plates should be used with PW coloured modules.

**MODE® Part M Range™**

**Unfurnished Plates - MiniGrid®**

- CMA401 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
- CMA402 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
- CMA403 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
- CMA404 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
- CMA406 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
- CMA426 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures
- CMA432 2 Gang MiniGrid® Unfurnished Plate - 3 Apertures

**Unfurnished Plates - MiniGrid®**

- CMA401AG 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
- CMA402AG 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
- CMA403AG 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
- CMA404AG 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
- CMA426AG 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures



**Antiviral Certified:** Mode® and Part M™ plates have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses. After a contact period of 4 hours, Mode® and Part M™ was shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.

**Antibacterial Certified:** Mode® and Part M™ wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.

Standards: BS 5733 Back Box Depth: Dependent On Modules Fitted

Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 9.5mm (D) 2 Gang: 146mm (W) x 86mm (H) x 9.5mm (D)



PRW401



PRW402




PRW403



PRW404



PRW406

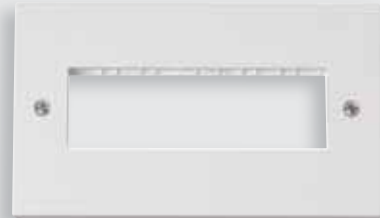

PRW426



PRW432



PRW plates should be used with PW coloured modules.

**Unfurnished Plates - MiniGrid®**

- PRW401 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
- PRW402 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
- PRW403 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
- PRW404 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
- PRW406 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
- PRW426 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures
- PRW432 2 Gang MiniGrid® Unfurnished Plate - 3 Apertures



**Antiviral Certified:** Polar™ plates have been independently tested and have shown to have anti-viral properties against enveloped and non-enveloped viruses. After a contact period of 4 hours, Polar™ was shown to have a 99.9% kill off rate against enveloped viruses and a 92% kill off rate against non-enveloped viruses.

**Antibacterial Certified:** Polar™ wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, Klebsiella Pneumonia and enveloped viruses.

Standards: BS 5733 Back Box Depth: Dependent On Modules Fitted  
 Dimensions: 1 Gang: 86mm (W) x 86mm (H) x 11mm (D) 2 Gang: 146mm (W) x 86mm (H) x 11mm (D)



CL401



CL402



CL403



CL404



CL406



CL426

CL plates should be used with WH coloured modules.



**Unfurnished Plates - MiniGrid®**

- CL401 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
- CL402 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
- CL403 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
- CL404 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
- CL406 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
- CL426 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures

Standards: BS 5733  
 Back Box Depth: Dependent On Modules Fitted  
 Dimensions: 1 Gang: 80mm (W) x 80mm (H) x 42mm (D) 2 Gang: 140mm (W) x 80mm (H) x 42mm (D)





WA401RD



WA402RD



WA403RD

essentials™

**Unfurnished Plates - MiniGrid®**

- WA401RD 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
- WA402RD 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
- WA403RD 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures

Standards: BS 5733 Back Box Depth: Dependent On Modules Fitted  
 Dimensions: 86mm (W) x 86mm (H) x 11mm (D)

# Minigrid® Modules

The Minigrid® modules illustrated on the following pages are all easily and quickly exchanged or mounted onto unfurnished plates by means of a simple single screw fixing.



**IN HOUSE LASER ETCHING**

Our in house laser printer provides flexibility to suit large volume batch or custom jobs. The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.





MD001WH



MD001  
(Back)



MD002BR



MD002  
(Back)

Conventional moulded 1 way, 2 way and intermediate switch modules can be used in all Click® accessories, Polar™ and Mode® moulded and metal ranges.

**10AX 1 Way Switch Modules**

- MD001BK 1 Way Switch Module - Black
- MD001PW 1 Way Switch Module - Polar White
- MD001WH 1 Way Switch Module - Click® White

**10AX 2 Way Switch Modules**

- MD002BK 2 Way Switch Module - Black
- MD002PW 2 Way Switch Module - Polar White
- MD002WH 2 Way Switch Module - Click® White
- MD002RD 2 Way Switch Module - Red

**Ingot 10AX 2 Way Switch Modules**

- MD002AB Ingot 2 Way Switch Module - Antique Brass
- MD002BN Ingot 2 Way Switch Module - Black Nickel
- MD002BR Ingot 2 Way Switch Module - Polished Brass
- MD002BS Ingot 2 Way Switch Module - Brushed Stainless
- MD002CH Ingot 2 Way Switch Module - Polished Chrome
- MD002PN Ingot 2 Way Switch Module - Pearl Nickel
- MD002SB Ingot 2 Way Switch Module - Satin Brass
- MD002SC Ingot 2 Way Switch Module - Satin Chrome
- MD002SS Ingot 2 Way Switch Module - Stainless Steel

Standards: BS EN 60669-1  
 Cable Size: 4 x 1.5mm<sup>2</sup> or 2 x 2.5mm<sup>2</sup>  
 Dimensions: 25mm (W) x 53mm (H) x 20mm (D)



MD028PW



MD028AB



MD028BR



MD028SS



MD028  
(Back)



MD028BS



MD028CH



MD028SB

Conventional moulded 1 way, 2 way and intermediate switch modules can be used in all Click® accessories, Polar™ and Mode® moulded and metal ranges.

**10AX Intermediate Switch Modules**

- MD028BK Intermediate Switch Module - Black
- MD028PW Intermediate Switch Module - Polar White
- MD028WH Intermediate Switch Module - Click® White

**Ingot 10AX Intermediate Switch Modules**

- MD028AB Intermediate Switch Module - Antique Brass
- MD028BN Intermediate Switch Module - Black Nickel
- MD028BR Intermediate Switch Module - Polished Brass
- MD028BS Intermediate Switch Module - Brushed Stainless
- MD028CH Intermediate Switch Module - Polished Chrome
- MD028PN Intermediate Switch Module - Pearl Nickel
- MD028SB Intermediate Switch Module - Satin Brass
- MD028SC Intermediate Switch Module - Satin Chrome
- MD028SS Intermediate Switch Module - Stainless Steel

Standards: BS EN 60669-1  
 Cable Size: 4 x 1.5mm<sup>2</sup> or 2 x 2.5mm<sup>2</sup>  
 Dimensions: 25mm (W) x 53mm (H) x 20mm (D)



Ingot modules offer metallic finish to switch modules which match each of our Decorative plate finishes.

2 way retractive switches offer "push-to-make" and "push-to-break".  
Ingot modules offer metallic finish to switch modules which match each of our decorative plate finishes.

**10AX 2 Way Intermediate Paddle Switch Modules (Triple Width)**

- MD038BK Intermediate Switch Module - Black
- MD038PW Intermediate Switch Module - Polar White
- MD038WH Intermediate Switch Module - Click® White

**10AX 2 Way Paddle Switch Modules (Triple Width)**

- MD009BK 2 Way Paddle Switch Module - Black
- MD009PW 2 Way Paddle Switch Module - Polar White
- MD009WH 2 Way Paddle Switch Module - Click® White

**Ingot 10AX 2 Way Paddle Switch Modules (Triple Width)**

- MD009AB 2 Way Paddle Switch Module - Antique Brass
- MD009BN 2 Way Paddle Switch Module - Black Nickel
- MD009BR 2 Way Paddle Switch Module - Polished Brass
- MD009BS 2 Way Paddle Switch Module - Brushed Stainless
- MD009CH 2 Way Paddle Switch Module - Polished Chrome
- MD009PN 2 Way Paddle Switch Module - Pearl Nickel
- MD009SB 2 Way Paddle Switch Module - Satin Brass
- MD009SC 2 Way Paddle Switch Module - Satin Chrome
- MD009SS 2 Way Paddle Switch Module - Stainless Steel

Standards: BS EN 60669-1  
Cable Size: 4 x 1.5mm<sup>2</sup> or 2 x 2.5mm<sup>2</sup>  
Dimensions: 48mm (W) x 52mm (H) x 20mm (D)

**10AX 2 Way Retractive Switch Modules**

- MD004BK 2 Way Retractive Switch Module - Black
- MD004PW 2 Way Retractive Switch Module - Polar White
- MD004WH 2 Way Retractive Switch Module - Click® White

**Ingot 10AX 2 Way Retractive Switch Modules**

- MD004AB 2 Way Retractive Switch Module - Antique Brass
- MD004BN 2 Way Retractive Switch Module - Black Nickel
- MD004BR 2 Way Retractive Switch Module - Polished Brass
- MD004BS 2 Way Retractive Switch Module - Brushed Stainless
- MD004CH 2 Way Retractive Switch Module - Polished Chrome
- MD004PN 2 Way Retractive Switch Module - Pearl Nickel
- MD004SB 2 Way Retractive Switch Module - Satin Brass
- MD004SC 2 Way Retractive Switch Module - Satin Chrome
- MD004SS 2 Way Retractive Switch Module - Stainless Steel

Standards: BS EN 60669-1  
Cable Size: 4 x 1.5mm<sup>2</sup> or 2 x 2.5mm<sup>2</sup>  
Dimensions: 25mm (W) x 53mm (H) x 20mm (D)



MD018WH



MD018BK



MD018BN-WM



MD018BK-TD



MD003SB



MD003WH



MD003BK



MD018PW-CH



MD018BR-DW



MD018RD



MD018  
(Back)



MD003  
(Back)



MD003CH



MD003BN



MI003

**IN HOUSE LASER ETCHING**

Our in house laser printer provides flexibility to suit large volume batch or custom jobs. The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.

**10AX 13A DP Resistive Switch Modules**

- MD018BK DP Switch Module - Black
- MD018PW DP Switch Module - Polar White
- MD018RD DP Switch Module - Red
- MD018WH DP Switch Module - Click® White

**Ingot 10AX 13A DP Resistive Switch Modules**

- MD018AB DP Switch Module - Antique Brass
- MD018BN DP Switch Module - Black Nickel
- MD018BR DP Switch Module - Polished Brass
- MD018BS DP Switch Module - Brushed Stainless
- MD018CH DP Switch Module - Polished Chrome
- MD018PN DP Switch Module - Pearl Nickel
- MD018SB DP Switch Module - Satin Brass
- MD018SC DP Switch Module - Satin Chrome
- MD018SS DP Switch Module - Stainless Steel

The MD018 modules listed are available with the laser etched legends listed here.

Suffix the two letters to complete the product code with legend eg.

MD018CH-FN

- WM Washing Machine
- FD Fridge
- TD Tumble Dryer
- FZ Freezer
- FF Fridge Freezer
- FN Fan
- DW Dishwasher
- HB Hob
- MW Microwave
- BL Boiler
- WD Waste Disposal
- OV Oven
- CH Cooker Hood
- WH Water Heater
- HT Hot Tap
- WC Wine Cooler
- WDR Warming Drawer

Standards: BS EN 60669-1  
Cable Size: 4 x 1.5mm<sup>2</sup> or 2 x 2.5mm<sup>2</sup>  
Dimensions: 25mm (W) x 53mm (H) x 20mm (D)

Understanding the code:  
MD - Module Style 536 - Product No BN - Module Finish -WM - Legend Style

**10AX 2 Way Keyswitch Modules**

- MD003BK 2 Way Keyswitch Module - Black
- MD003PW 2 Way Keyswitch Module - Polar White
- MD003WH 2 Way Keyswitch Module - Click® White

**Ingot 10AX 2 Way Keyswitch Modules**

- MD003AB 2 Way Keyswitch Module - Antique Brass
- MD003BN 2 Way Keyswitch Module - Black Nickel
- MD003BR 2 Way Keyswitch Module - Polished Brass
- MD003BS 2 Way Keyswitch Module - Brushed Stainless
- MD003CH 2 Way Keyswitch Module - Polished Chrome
- MD003PN 2 Way Keyswitch Module - Pearl Nickel
- MD003SB 2 Way Keyswitch Module - Satin Brass
- MD003SC 2 Way Keyswitch Module - Satin Chrome
- MD003SS 2 Way Keyswitch Module - Stainless Steel

**Spare Key For Keyswitch**

- MI003 Spare Key For Keyswitch

Standards: BS EN 60669-1  
Cable Size: 4 x 1.5mm<sup>2</sup> or 2 x 2.5mm<sup>2</sup>  
Dimensions: 25mm (W) x 52.5mm (H) x 20mm (D) MI003: 50mm (W) x 14mm (H) x 1mm (D)



**10AX DP Keyswitch 'Emergency Test' Modules**

- MD029BK DP Keyswitch Module 'Emergency Test' - Black
- MD029PW DP Keyswitch Module 'Emergency Test' - Polar White
- MD029WH DP Keyswitch Module 'Emergency Test' - Click® White

**Ingot 10AX DP Keyswitch 'Emergency Test' Modules**

- MD029AB DP Keyswitch Module 'Emergency Test' - Antique Brass
- MD029BN DP Keyswitch Module 'Emergency Test' - Black Nickel
- MD029BR DP Keyswitch Module 'Emergency Test' - Polished Brass
- MD029BS DP Keyswitch Module 'Emergency Test' - Brushed Stainless
- MD029CH DP Keyswitch Module 'Emergency Test' - Polished Chrome
- MD029PN DP Keyswitch Module 'Emergency Test' - Pearl Nickel
- MD029SB DP Keyswitch Module 'Emergency Test' - Satin Brass
- MD029SC DP Keyswitch Module 'Emergency Test' - Satin Chrome
- MD029SS DP Keyswitch Module 'Emergency Test' - Stainless Steel

**Spare Key For Keyswitch**

- MI003 Spare Key For Keyswitch

Standards: BS EN 60669-1  
 Cable Size: 4 x 1.5mm<sup>2</sup> or 2 x 2.5mm<sup>2</sup>  
 Dimensions: 25mm (W) x 52.5mm (H) x 20mm (D)

**10AX 13A DP Resistive Keyswitch Modules**

- MD046BK DP Keyswitch Module - Black
- MD046PW DP Keyswitch Module - Polar White
- MD046RD DP Keyswitch Module - Red
- MD046WH DP Keyswitch Module - Click® White
- MD046RDTT DP Keyswitch Module 'Test' - Red

**Ingot 10AX 13A DP Resistive Keyswitch Modules**

- MD046AB DP Keyswitch Module - Antique Brass
- MD046BN DP Keyswitch Module - Black Nickel
- MD046BR DP Keyswitch Module - Polished Brass
- MD046BS DP Keyswitch Module - Brushed Stainless
- MD046CH DP Keyswitch Module - Polished Chrome
- MD046PN DP Keyswitch Module - Pearl Nickel
- MD046SB DP Keyswitch Module - Satin Brass
- MD046SC DP Keyswitch Module - Satin Chrome
- MD046SS DP Keyswitch Module - Stainless Steel

Standards: BS EN 60669-1  
 Cable Size: 4 x 1.5mm<sup>2</sup> or 2 x 2.5mm<sup>2</sup>  
 Dimensions: 25mm (W) x 52.5mm (H) x 20mm (D)

**Spare Key For Keyswitch**

- MI003 Spare Key For Keyswitch



**Blank Modules**

- MD008BK Blank Module - Black
- MD008PW Blank Module - Polar White
- MD008WH Blank Module - Click® White

**Ingot Blank Modules**

- MD008AB Blank Module - Antique Brass
- MD008BN Blank Module - Black Nickel
- MD008BR Blank Module - Polished Brass
- MD008BS Blank Module - Brushed Stainless
- MD008CH Blank Module - Polished Chrome
- MD008PN Blank Module - Pearl Nickel
- MD008SB Blank Module - Satin Brass
- MD008SC Blank Module - Satin Chrome
- MD008SS Blank Module - Stainless Steel

**Indicator Modules**

- MD280 240V Red Indicator Module
- MD281 240V Amber Indicator Module
- MD282 240V Green Indicator Module

**Ingot 13A Fused Connection Unit Modules**

- MD047BKAB FCU Module - Antique Brass
- MD047BKBN FCU Module - Black Nickel
- MD047BKBR FCU Module - Polished Brass
- MD047BKBS FCU Module - Brushed Stainless
- MD047BKCH FCU Module - Polished Chrome
- MD047BKPN FCU Module - Pearl Nickel
- MD047BKSB FCU Module - Satin Brass
- MD047BKSC FCU Module - Satin Chrome
- MD047BKSS FCU Module - Stainless Steel
- MD047WHBR FCU Module - Polished Brass
- MD047WHBS FCU Module - Brushed Stainless
- MD047WHCH FCU Module - Polished Chrome
- MD047WHPN FCU Module - Pearl Nickel
- MD047WHSB FCU Module - Satin Brass
- MD047WHSC FCU Module - Satin Chrome
- MD047WHSS FCU Module - Stainless Steel
- MD047GYBS FCU Module - Brushed Stainless
- MD047GYSC FCU Module - Satin Chrome
- MD047GYSS FCU Module - Stainless Steel

**13A Fused FCU Modules**

- MD047BK 13A Fused FCU Module - Black
- MD047PW 13A Fused FCU Module - Polar White
- MD047RD 13A Fused FCU Module - Red
- MD047WH 13A Fused FCU Module - Click® White

Standards: BS 5733  
 Cable Size: 280: 4 x 1.5mm<sup>2</sup> or 2 x 2.5mm<sup>2</sup>  
 Dimensions: 25mm (W) x 52mm (H) x 20mm (D) 280: 25mm (W) x 52.5mm (H) x 19mm (D)

Standards: BS 5733 BS 1362  
 Cable Size: 4 x 1.5mm<sup>2</sup> or 2 x 2.5mm<sup>2</sup>  
 Dimensions: 25mm (W) x 57mm (H) x 25.2mm (D)



Complete with cord restraint, live and neutral terminals.

**Ingot 20A Flex Outlet Modules**

- MD017KAB Flex Outlet Module - Antique Brass
- MD017KBN Flex Outlet Module - Black Nickel
- MD017KBR Flex Outlet Module - Polished Brass
- MD017KBS Flex Outlet Module - Brushed Stainless
- MD017BKCH Flex Outlet Module - Polished Chrome
- MD017BKPN Flex Outlet Module - Pearl Nickel
- MD017BKSB Flex Outlet Module - Satin Brass
- MD017BKSC Flex Outlet Module - Satin Chrome
- MD017BKSS Flex Outlet Module - Stainless Steel
- MD017WHBR Flex Outlet Module - Polished Brass
- MD017WHBS Flex Outlet Module - Brushed Stainless
- MD017WHCH Flex Outlet Module - Polished Chrome
- MD017WHPN Flex Outlet Module - Pearl Nickel
- MD017WHSB Flex Outlet Module - Satin Brass
- MD017WHSC Flex Outlet Module - Satin Chrome
- MD017WHSS Flex Outlet Module - Stainless Steel
- MD017GYBS Flex Outlet Module - Brushed Stainless
- MD017GYSC Flex Outlet Module - Satin Chrome
- MD017GYSS Flex Outlet Module - Stainless Steel

Standards: BS 5733  
 Cable Size: 4 x 1.5mm<sup>2</sup> or 2 x 2.5mm<sup>2</sup>  
 Dimensions: 25mm (W) x 56.5mm (H) x 30mm (D) Flex outlet dia.: 11mm

**20A Flex Outlet Modules**

- MD017BK Flex Outlet Module - Black
- MD017PW Flex Outlet Module - Polar White
- MD017WH Flex Outlet Module - Click® White



**10AX 1 Way Retractive 'Bell' Switch Modules**

- MD005BK 1 Way Retractive Switch Module 'Bell' - Black
- MD005PW 1 Way Retractive Switch Module 'Bell' - Polar White
- MD005WH 1 Way Retractive Switch Module 'Bell' - Click® White

**Ingot 10AX 1 Way Retractive 'Bell' Switch Modules**

- MD005AB 1 Way Retractive Switch Module 'Bell' - Antique Brass
- MD005BN 1 Way Retractive Switch Module 'Bell' - Black Nickel
- MD005BR 1 Way Retractive Switch Module 'Bell' - Polished Brass
- MD005BS 1 Way Retractive Switch Module 'Bell' - Brushed Stainless
- MD005CH 1 Way Retractive Switch Module 'Bell' - Polished Chrome
- MD005PN 1 Way Retractive Switch Module 'Bell' - Pearl Nickel
- MD005SB 1 Way Retractive Switch Module 'Bell' - Satin Brass
- MD005SC 1 Way Retractive Switch Module 'Bell' - Satin Chrome
- MD005SS 1 Way Retractive Switch Module 'Bell' - Stainless Steel

Standards: BS EN 60669-1  
 Cable Size: 4 x 1.5mm<sup>2</sup> or 2 x 2.5mm<sup>2</sup>  
 Dimensions: 25mm (W) x 53mm (H) x 20mm (D)



MD070PW



MD070BK



MD070AB



MD070BN



MD075PW



MD075BK



MD075AB



MD075BN



MD070BR



MD070BS



MD070CH



MD070  
(Back)



MD075  
(Back)



MD075BS



MD075CH



MD075PN

All 3 position switches feature a central off position.

3 position retractive switches are "push-to-make" and feature a central off position

**10A 3 Position Switch Modules**

- MD070BK 3 Position Switch Module - Black
- MD070PW 3 Position Switch Module - Polar White
- MD070WH 3 Position Switch Module - Click® White

**Ingot 10A 3 Position Switch Modules**

- MD070AB 3 Position Switch Module - Antique Brass
- MD070BN 3 Position Switch Module - Black Nickel
- MD070BR 3 Position Switch Module - Polished Brass
- MD070BS 3 Position Switch Module - Brushed Stainless
- MD070CH 3 Position Switch Module - Polished Chrome
- MD070PN 3 Position Switch Module - Pearl Nickel
- MD070SB 3 Position Switch Module - Satin Brass
- MD070SC 3 Position Switch Module - Satin Chrome
- MD070SS 3 Position Switch Module - Stainless Steel

Standards: BS EN 60669-1  
 Cable Size: 4 x 1.5mm<sup>2</sup> or 2 x 2.5mm<sup>2</sup>  
 Dimensions: 25mm (W) x 57mm (H) x 27mm (D)

**10A 3 Position Retractive Switch Modules**

- MD075BK 3 Position Retractive Switch Module - Black
- MD075PW 3 Position Retractive Switch Module - Polar White
- MD075WH 3 Position Retractive Switch Module - Click® White

**Ingot 10A 3 Position Retractive Switch Modules**

- MD075AB 3 Position Retractive Switch Module - Antique Brass
- MD075BN 3 Position Retractive Switch Module - Black Nickel
- MD075BR 3 Position Retractive Switch Module - Polished Brass
- MD075BS 3 Position Retractive Switch Module - Brushed Stainless
- MD075CH 3 Position Retractive Switch Module - Polished Chrome
- MD075PN 3 Position Retractive Switch Module - Pearl Nickel
- MD075SB 3 Position Retractive Switch Module - Satin Brass
- MD075SC 3 Position Retractive Switch Module - Satin Chrome
- MD075SS 3 Position Retractive Switch Module - Stainless Steel

Standards: BS EN 60669-1  
 Cable Size: 4 x 1.5mm<sup>2</sup> or 2 x 2.5mm<sup>2</sup>  
 Dimensions: 25mm (W) x 57mm (H) x 27mm (D)





**10A 3 Pole Fan Isolation Modules (Twin Width)**

- MD020BK 3 Pole Fan Isolation Switch Module - Black
- MD020PW 3 Pole Fan Isolation Switch Module - Polar White
- MD020WH 3 Pole Fan Isolation Switch Module - Click® White

**Ingot 10A 3 Pole Fan Isolation Modules (Twin Width)**

- MD020AB 3 Pole Fan Isolation Switch Module - Antique Brass
- MD020BN 3 Pole Fan Isolation Switch Module - Black Nickel
- MD020BR 3 Pole Fan Isolation Switch Module - Polished Brass
- MD020BS 3 Pole Fan Isolation Switch Module - Brushed Stainless
- MD020CH 3 Pole Fan Isolation Switch Module - Polished Chrome
- MD020PN 3 Pole Fan Isolation Switch Module - Pearl Nickel
- MD020SB 3 Pole Fan Isolation Switch Module - Satin Brass
- MD020SC 3 Pole Fan Isolation Switch Module - Satin Chrome
- MD020SS 3 Pole Fan Isolation Switch Module - Stainless Steel

**10A 3 Pole Lockable Fan Isolation Modules (Twin Width)**

- MD220BK 3 Pole Lockable Fan Switch Module - Black
- MD220PW 3 Pole Lockable Fan Switch Module - Polar White
- MD220WH 3 Pole Lockable Fan Switch Module - Click® White

Standards: BS EN 60669-1  
 Cable Size: 4 x 1.5mm<sup>2</sup> or 2 x 2.5mm<sup>2</sup>  
 Dimensions: 41mm (W) x 52.5mm (H) x 22mm (D)

**20A 2 Way Switch Modules (Twin Width)**

- MD024BK 2 Way Switch Module - Black
- MD024PW 2 Way Switch Module - Polar White
- MD024WH 2 Way Switch Module - Click® White

**Ingot 20A 2 Way Switch Modules (Twin Width)**

- MD024BN 2 Way Switch Module - Black Nickel
- MD024BS 2 Way Switch Module - Brushed Stainless
- MD024CH 2 Way Switch Module - Polished Chrome
- MD024SC 2 Way Switch Module - Satin Chrome
- MD024SS 2 Way Switch Module - Stainless Steel

Standards: BS EN 60669-1  
 Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup> MD032: 4 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
 Dimensions: 41mm (W) x 52.5mm (H) x 22mm (D)

**32A DP Switch Modules (Twin Width)**

- MD032BK DP Switch Module - Black
- MD032PW DP Switch Module - Polar White
- MD032WH DP Switch Module - Click® White

**Ingot 32A DP Switch Modules (Twin Width)**

- MD032BN DP Switch Module - Black Nickel
- MD032BS DP Switch Module - Brushed Stainless
- MD032CH DP Switch Module - Polished Chrome
- MD032SC DP Switch Module - Satin Chrome
- MD032SS DP Switch Module - Stainless Steel



MD022BK MD022CH MD022BR-WM MD022BS-BL



MD022CH-CH MD022PN-FF MD022SB-TD MD022 (Back)

**IN HOUSE LASER ETCHING**

Our in house laser printer provides flexibility to suit large volume batch or custom jobs. The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.

**20A DP Switch Modules (Twin Width)**

- MD022BK DP Switch Module - Black
- MD022PW DP Switch Module - Polar White
- MD022WH DP Switch Module - Click® White

**Ingot 20A DP Switch Modules (Twin Width)**

- MD022AB DP Switch Module - Antique Brass
- MD022BN DP Switch Module - Black Nickel
- MD022BR DP Switch Module - Polished Brass
- MD022BS DP Switch Module - Brushed Stainless
- MD022CH DP Switch Module - Polished Chrome
- MD022PN DP Switch Module - Pearl Nickel
- MD022SB DP Switch Module - Satin Brass
- MD022SC DP Switch Module - Satin Chrome
- MD022SS DP Switch Module - Stainless Steel

The MD022 modules listed are available with the laser etched legends listed here.

Suffix the two letters to complete the product code with legend eg. MD022CH-FN

- WM Washing Machine
- FD Fridge
- TD Tumble Dryer
- FZ Freezer
- FF Fridge Freezer
- FN Fan
- DW Dishwasher
- HB Hob
- MW Microwave
- BL Boiler
- WD Waste Disposal
- OV Oven
- CH Cooker Hood
- WH Water Heater
- HT Hot Tap
- WC Wine Cooler
- WDR Warming Drawer

Standards: BS EN 60669-1  
Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
Dimensions: 41mm (W) x 52.5mm (H) x 22mm (D)

Understanding the code:

MD - Module Style 536 - Product No BN - Module Finish -WM - Legend Style



MD023BK MD023CH MD023BR-WM MD023BS-BL



MD023 (Back) MD023PN-FF MD023SB-TD MD023WH-WD

**IN HOUSE LASER ETCHING**

Our in house laser printer provides flexibility to suit large volume batch or custom jobs. The precision, permanent, fine marking effect is customisable, offering you and your customers a wider variety of options.

**20A DP Switch Modules With Neon (Twin Width)**

- MD023BK DP Switch With Neon Module - Black
- MD023PW DP Switch With Neon Module - Polar White
- MD023WH DP Switch With Neon Module - Click® White

**Ingot 20A DP Switch Modules With Neon (Twin Width)**

- MD023AB DP Switch With Neon Module - Antique Brass
- MD023BN DP Switch With Neon Module - Black Nickel
- MD023BR DP Switch With Neon Module - Polished Brass
- MD023BS DP Switch With Neon Module - Brushed Stainless
- MD023CH DP Switch With Neon Module - Polished Chrome
- MD023PN DP Switch With Neon Module - Pearl Nickel
- MD023SB DP Switch With Neon Module - Satin Brass
- MD023SC DP Switch With Neon Module - Satin Chrome
- MD023SS DP Switch With Neon Module - Stainless Steel

The MD023 modules listed are available with the laser etched legends listed here.

Suffix the two letters to complete the product code with legend eg. MD023CH-FN

- WM Washing Machine
- FD Fridge
- TD Tumble Dryer
- FZ Freezer
- FF Fridge Freezer
- FN Fan
- DW Dishwasher
- HB Hob
- MW Microwave
- BL Boiler
- WD Waste Disposal
- OV Oven
- CH Cooker Hood
- WH Water Heater
- HT Hot Tap
- WC Wine Cooler
- WDR Warming Drawer

Standards: BS EN 60669-1  
Cable Size: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup>  
Dimensions: 41mm (W) x 52.5mm (H) x 22mm (D)

Understanding the code:

MD - Module Style 536 - Product No BN - Module Finish -WM - Legend Style



MD150WH



MD150CH

The Click® dimmer module mounting kit is double aperture size and is suitable for mounting on all existing MiniGrid® blank plates, whether they be moulded or decorative metal plates. Please refer to our dedicated range catalogues for product codes of available plates.

The dimmer module mounting kits comprise a module mount frame, operating knob and innovative nut runner to facilitate the fixing of the locking nut. Locking nut and washer supplied with the Click® dimmer modules.

The decorative operating knob and the mount frame are finished in the same design as the selected wall plates. Equally, they may be mounted on contrasting plate finish to produce a particular decorative effect.



Dimmer module not supplied - see page J38.  
Mounting nut & washer supplied with dimmer module.

**Ingot Dimmer Module Mounting Kits (Twin Width) - Dimmer Modules Not Supplied**

- MD150AB Dimmer Module Mounting Kit - Antique Brass
- MD150BK Dimmer Module Mounting Kit - Black
- MD150BN Dimmer Module Mounting Kit - Black Nickel
- MD150BR Dimmer Module Mounting Kit - Polished Brass
- MD150BS Dimmer Module Mounting Kit - Brushed Stainless
- MD150CH Dimmer Module Mounting Kit - Polished Chrome
- MD150PN Dimmer Module Mounting Kit - Pearl Nickel
- MD150PW Dimmer Module Mounting Kit - Polar White
- MD150SB Dimmer Module Mounting Kit - Satin Brass
- MD150SC Dimmer Module Mounting Kit - Satin Chrome
- MD150SS Dimmer Module Mounting Kit - Stainless Steel
- MD150WH Dimmer Module Mounting Kit - Click® White

Requires separate ON/OFF switch. This can also be added to the accessory ranges where shown

Standards: BS 5733  
Dimensions: 41mm (W) x 52.5mm (H) x 13.2mm (D)



MD9010



MD9001



MD9022




MD9042



SP900



MD9014



MD9014 (Back)

- 1 Switch 1 allows the minimum brightness to be adjusted
- 2 Switch 2 allows the dimming mode to be adjusted

**Eliminate dimmer flickering**

Our new dimmer is much easier to program than regular dimmers because of the two small switches on the back of the module. This allows the dimmer to be programmed without removing from the plate.

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate.

**Dimmer Modules**

- MD9001 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
- MD9010 1-10V Analogue Dimmer Module (25 x 62mm)  
Requires separate ON/OFF switch. This can also be added to the accessory ranges where shown.
- MD9022 250W 2 Leading Edge Way Dimmer Module (25 x 62mm)
- MD9042 400W 2 Way Leading Edge Dimmer Module (25 x 62mm)
- MD9014 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)  
Due to the reduced height, the MD9014 is suitable for mounting directly above each other on multi-tier plates.

**Dimmer M10 Nut Runner**

- SP900 Dimmer M10 Nut Runner Tool  
Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate


Standards: BS EN 60669-1 BS EN 55015 BS EN 61000-3-2 BS EN 61000-3-3  
9001: BS EN 60669-1 9014: BS EN 60669 BS EN 55015 BS EN 61000

Cable Size: 2 x 1.5mm<sup>2</sup>  
Dimensions: 25.5mm (W) x 67mm (H) x 23.2mm (D)  
9014: 25mm (W) x 57.5mm (H) x 24.2mm (D)  
900: 40mm (W) x 40mm (H) x 22.5mm (D)

Type: 9001: On & Off Only 9010: Analogue 9022 9042: Leading Edge 9014: Trailing Edge & Leading Edge



MD9102AB



MD9102BR



MD9102BN



MD9102  
(Back)



MD9125PN



MD9125CH



MD9125BN



MD9125  
(Back)

Toggle Modules only fit in existing toggle plates.

#### 10AX 2 Way Toggle Switch Modules

- MD9102AB 2 Way Toggle Switch Module - Antique Brass
- MD9102BN 2 Way Toggle Switch Module - Black Nickel
- MD9102BR 2 Way Toggle Switch Module - Polished Brass
- MD9102CH 2 Way Toggle Switch Module - Polished Chrome
- MD9102PN 2 Way Toggle Switch Module - Pearl Nickel

#### 10AX Intermediate Toggle Switch Modules

- MD9125AB Intermediate Toggle Switch Module - Antique Brass
- MD9125BN Intermediate Toggle Switch Module - Black Nickel
- MD9125BR Intermediate Toggle Switch Module - Polished Brass
- MD9125CH Intermediate Toggle Switch Module - Polished Chrome
- MD9125PN Intermediate Toggle Switch Module - Pearl Nickel

Standards: BS EN 60669-1  
 Cable Size: 4 x 1.5mm<sup>2</sup> or 2 x 2.5mm<sup>2</sup>  
 Dimensions: 25mm (W) x 62mm (H) x 22mm (D)